







MRT51

RISING CLAMP FEMALE PLUG




Pitch	mm	5
Poles	x	2/12
Rated Voltage	V	250
Nominal Current	A	12
Types of cable	-	
Nominal cross section		0,2 ÷ 2,5 30 ÷ 14
Stripping lenght	mm	6
Torque	Nm/ Lb.in	0,5/4
Bottom/Upper limit temperature	°C	-30/160
Captive screw	-	M3

		V	A	mm²/AWG
VDE EN60998	Pending	250	12	2,5
cUL	Pending	300	12	14
Insulating group	-	I		
Impulse withstand voltage	KV	4	4	4
Overvoltage cat. / Pollution degree	-/-	III/3	III/2	II/2
Withstand voltage	V	250	300	600
Protection index	-	IP00		
Plastic material		PA - UL94 V0		
Clamp / Plating	-	Copper Alloy / Ni		
Contact / Plating	-	Copper Alloy / Sn		
Screw / Plating	-	Steel / Zn		
Colours	Y	VE /on demand	GR	NE

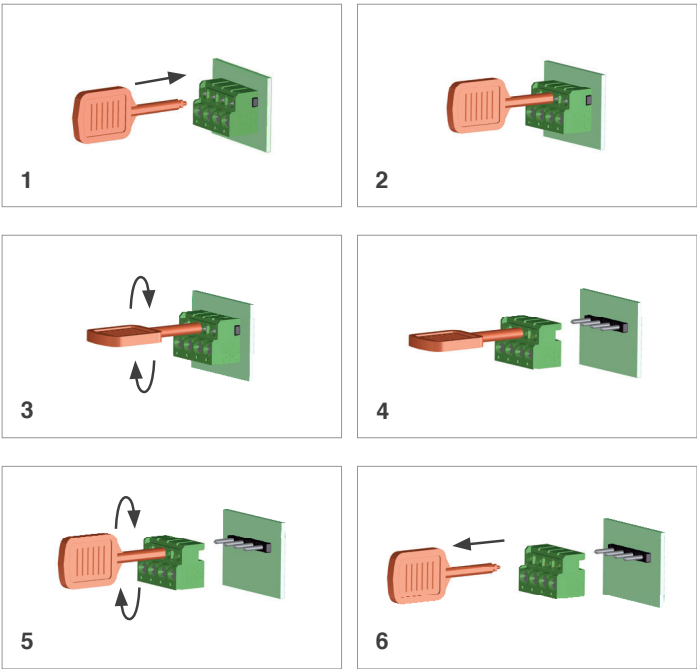

Key function

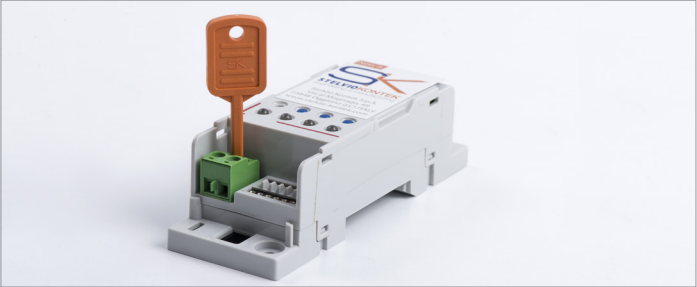

How to order

MRT51	P 5/10	2/12	.../FV/SNP	.../V01	Y	N...
Type	Pitch	Poles	Version	Type	Colours	Printing