

TERMINAL BLOCKS FOR P.C.B.
 WIRE PROTECTION

MORSETTI PER C.S.
 LINGUETTA

BLOCS DE JONCTION C.I.
 LANGUETTE

PRINTKLEMMEN
 DRAHTSCHUTZ

Pitch Pas	Passo Rastermaß	mm
Rated Voltage Tension nominale	Tensione nominale Bemessungsspannung	V
Rated Current Intensité nominale	Corrente nominale Bemessungsstrom	A

Types of cables Type du conducteur	Tipo cavi Leitungstypen	
Nominal cross section Section nominale	Sezione nominale Nennquerschnitt	mm² AWG
Stripping lenght Longueur de dénudage	Lunghezza spelatura Abisolierlänge	mm
Torque Couple de serrage	Coppia di torsione Drehmoment	Nm Lb-in
Temperature Température	Temperatura Temperatur	°C
Housing Corps isolant	Corpo isolante Isolierkörper	
Screw Vis	Vite Schraube	
		mm

	IMQ	EN60998
	VDE	EN60998
	cUL	UL1059 + C22.2 n°158

Poles Pôles	Poli Polzahl	X
Colours Couleurs	Colori Farben	Y

How to order Référence de commande		Ordinazione Bestellschlüssel			
CBL	5	/ X	SQ	Y	N...
Type	Pitch	Poles	Version	Colors	Printing
Tipo	Passo	Poli	Versione	Colori	Numerazione
Type	Pas	Pôles	Version	Couleurs	Marquage
Typ	Rastermaß	Polzahl	Version	Farben	Bedruckung

CBL

Single block · Blocco unico
 Monobloc · Einzelblock

Poles · Poli · Pôles · Polzahl
 2/24




5
250
24

		
0,5 ÷ 4 30 ÷ 12	0,5 ÷ 2,5 30 ÷ 12	0,5 ÷ 2,5 30 ÷ 12
7		
0,5	/	4
85		
PC - UL 94 V0		
M2,5		
	0,6 x 3,5	

V	A	mm²/AWG
250	24	0,5 ÷ 2,5
250	24	0,5 ÷ 2,5
300	18	30 ÷ 12

min 2 - max 24		
GR	/ on demand	NE

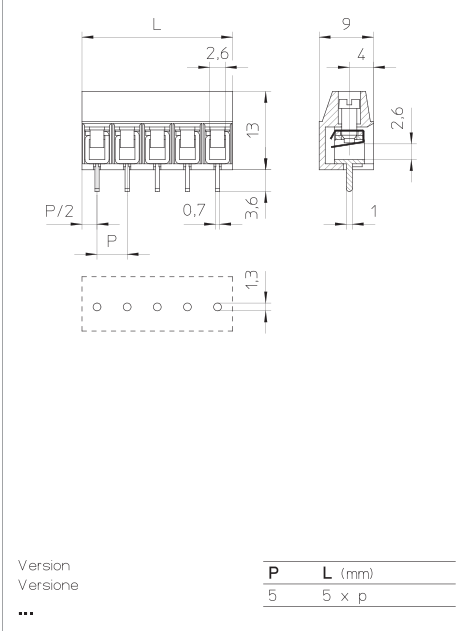

*SQ Version = Horizontal version