

HEADERS
FOR P.C.B.

CONNETTORI MASCHIO
PER C.S.

CONNECTEURS MÂLE
POUR C.I.


STIFTLEISTE
FÜR LEITERPLATTEN

Pitch Pas	Passo Rastermaß	mm
Rated Voltage Tension nominale	Tensione nominale Bemessungsspannung	V
Rated Current Intensité nominale	Corrente nominale Bemessungsstrom	A
Temperature Température	Temperatura Temperatur	°C
Housing Corps isolant	Corpo isolante Isolierkörper	

	IMQ	EN61984
	VDE	EN61984
	cUL	UL1059 + C22.2 n°158

Poles Pôles	Poli Polzahl	X
Colours Couleurs	Colori Farben	Y
Other information Autres données	Altri dati Weitere Informationen	p.

How to order Référence de commande		Ordinazione Bestellschlüssel			
CHM	5	/ X	...	Y	N...
Type	Pitch	Poles	Version	Colors	Printing
Tipo	Passo	Poli	Versione	Colori	Numerazione
Type	Pas	Pôles	Version	Couleurs	Marquage
Typ	Rastermaß	Polzahl	Version	Farben	Bedruckung

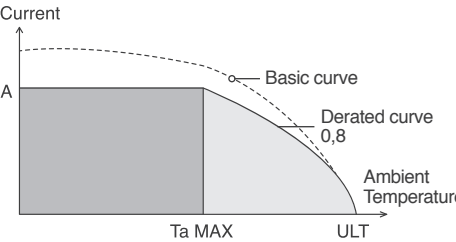

Ta MAX: Max Ambient Temperature to perform nominal values
ULT: Upper Limit Temperature
*SQ Version = Horizontal version

CHM

Single block · Blocco unico
Monobloc · Einzelblock

Poles · Poli · Pôles · Polzahl

2/24 (5)
2/12 (10)



5 - 10
250 - 600
10
110
PA - UL 94 V0

V	A	mm²/AWG
300	6	30 ÷ 16

min 2 - max 24 (pitch 5) / max 12 (pitch 10)
NE

