

TERMINAL BLOCKS FOR P.C.B.  
 RISING CLAMP

MORSETTI PER C.S.  
 CARRELLO

BLOCS DE JONCTION C.I.  
 ÉTRIER REMONTANT

PRINTKLEMMEN  
 LIFTPRINZIP

|                                                                                     |                                            |             |
|-------------------------------------------------------------------------------------|--------------------------------------------|-------------|
| Pitch<br>Pas                                                                        | Passo<br>Rastermaß                         | mm          |
| Rated Voltage<br>Tension nominale                                                   | Tensione nominale<br>Bemessungsspannung    | V           |
| Rated Current<br>Intensité nominale                                                 | Corrente nominale<br>Bemessungsstrom       | A           |
| Types of cables<br>Type du conducteur                                               | Tipo cavi<br>Leitungstypen                 |             |
| Nominal cross section<br>Section nominale                                           | Sezione nominale<br>Nennquerschnitt        | mm²<br>AWG  |
| Stripping lenght<br>Longueur de dénudage                                            | Lunghezza spelatura<br>Abisolierlänge      | mm          |
| Torque<br>Couple de serrage                                                         | Coppia di torsione<br>Drehmoment           | Nm<br>Lb-in |
| Temperature<br>Température                                                          | Temperatura<br>Temperatur                  | °C          |
| Housing<br>Corps isolant                                                            | Corpo isolante<br>Isolierkörper            |             |
| Captive Screw<br>Vis Imperdabile                                                    | Vite Imperdibile<br>Unverlierbare Schraube |             |
|  |                                            | mm          |


|                                                                                     |                  |                      |
|-------------------------------------------------------------------------------------|------------------|----------------------|
|  | IMQ              | EN60998              |
|   | VDE              | EN60998              |
|   | cUL              | UL1059 + C22.2 n°158 |
| Poles<br>Pôles                                                                      | Poli<br>Polzahl  | X                    |
| Colours<br>Couleurs                                                                 | Colori<br>Farben | Y                    |

|                                       |           |                                 |          |          |             |
|---------------------------------------|-----------|---------------------------------|----------|----------|-------------|
| How to order<br>Référence de commande |           | Ordinazione<br>Bestellschlüssel |          |          |             |
| CLA                                   | 5         | / X                             | SQ       | Y        | N...        |
| Type                                  | Pitch     | Poles                           | Version  | Colors   | Printing    |
| Tipo                                  | Passo     | Poli                            | Versione | Colori   | Numerazione |
| Type                                  | Pas       | Pôles                           | Version  | Couleurs | Marquage    |
| Typ                                   | Rastermaß | Polzahl                         | Version  | Farben   | Bedruckung  |

CLA
 CLA..SQ\*

Single block · Blocco unico  
 Monobloc · Einzelblock


Poles · Poli · Pôles · Polzahl
 2/12

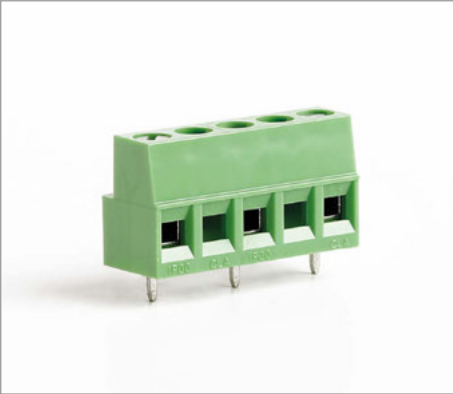

|                                                                                     |                                                                                   |                                                                                    |
|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
| 10 - 10,16                                                                          |                                                                                   |                                                                                    |
| 630                                                                                 |                                                                                   |                                                                                    |
| 24                                                                                  |                                                                                   |                                                                                    |
|    |  |  |
| 0,2 ÷ 4<br>30 ÷ 12                                                                  | 0,2 ÷ 2,5<br>30 ÷ 12                                                              | 0,2 ÷ 2,5<br>30 ÷ 12                                                               |
| 6                                                                                   |                                                                                   |                                                                                    |
| 0,5                                                                                 | /                                                                                 | 4                                                                                  |
| 110                                                                                 |                                                                                   |                                                                                    |
| PA - UL 94 V0                                                                       |                                                                                   |                                                                                    |
| M3                                                                                  |                                                                                   |                                                                                    |
|  | 0,6 x 3,5                                                                         |                                                                                    |

|     |    |           |
|-----|----|-----------|
| V   | A  | mm²/AWG   |
| 750 | 24 | 0,5 ÷ 2,5 |
| 750 | 24 | 0,5 ÷ 2,5 |
| 300 | 14 | 30 ÷ 12   |

|                |             |                       |
|----------------|-------------|-----------------------|
| min 2 - max 12 |             |                       |
| VE             | / on demand | GR GR1 NE AR BL RO GI |
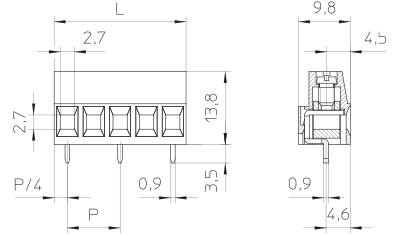
|                                                                 |                                                                                     |   |        |    |            |       |                  |
|-----------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---|--------|----|------------|-------|------------------|
| Version<br>Versione                                                                                                                                 |  |   |        |    |            |       |                  |
| Version<br>Versione                                                                                                                                 |  |   |        |    |            |       |                  |
| SQ* <table> <tr> <th>P</th><th>L (mm)</th></tr> <tr> <td>10</td><td>(10 x p)-5</td></tr> <tr> <td>10,16</td><td>(10,16 x p)-5,08</td></tr> </table> |                                                                                     | P | L (mm) | 10 | (10 x p)-5 | 10,16 | (10,16 x p)-5,08 |
| P                                                                                                                                                   | L (mm)                                                                              |   |        |    |            |       |                  |
| 10                                                                                                                                                  | (10 x p)-5                                                                          |   |        |    |            |       |                  |
| 10,16                                                                                                                                               | (10,16 x p)-5,08                                                                    |   |        |    |            |       |                  |

\*SQ Version = Horizontal version