

HEADERS
FOR P.C.B.

CONNETTORI MASCHIO
PER C.S.

CONNECTEURS MÂLE
POUR C.I.

STIFTLISTE
FÜR LEITERPLATTEN


Pitch Pas	Passo Rastermaß	mm
Rated Voltage Tensione nominale	Tensione nominale Bemessungsspannung	V
Rated Current Intensité nominale	Corrente nominale Bemessungsstrom	A

Temperature Température	Temperatura Temperatur	°C
Housing Corps isolant	Corpo isolante Isolierkörper	

	IMQ	EN61984
	VDE	EN61984
	cUL	UL1059 + C22.2 n°158

Poles Pôles	Poli Polzahl	X
Colours Couleurs	Colori Farben	Y
Other information Autres données	Altri dati Weitere Informationen	p.

How to order Référence de commande		Ordinazione Bestellschlüssel			
CPM	5	/ X	...	Y	N...
Type	Pitch	Poles	Version	Colors	Printing
Tipo	Passo	Poli	Versione	Colori	Numerazione
Type	Pas	Pôles	Version	Couleurs	Marquage
Typ	Rastermaß	Polzahl	Version	Farben	Bedruckung

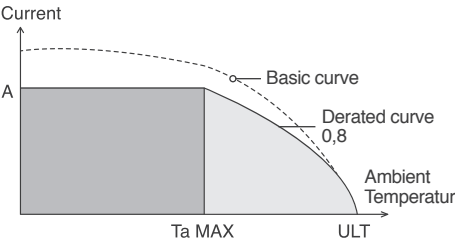

Ta MAX: Max Ambient Temperature to perform nominal value;
ULT: Upper Limit Temperature

*SQ Version = Horizontal version

CPM

CPM..SQ*

Single block · Blocco unico
Monobloc · Einzelblock

Poles · Poli · Pôles · Polzahl 2/12




7,5 - 7,62
500
20

Ta MAX: 55	/	ULT: 160
PA - UL 94 V0		

V	A	mm²/AWG
500	18	0,2 ÷ 2,5
500	20	0,2 ÷ 2,5
300	16	24 ÷ 12

min 2 - max 12		
VE	/ on demand	GR GR1 NE AR BL RO GI
D/B4		

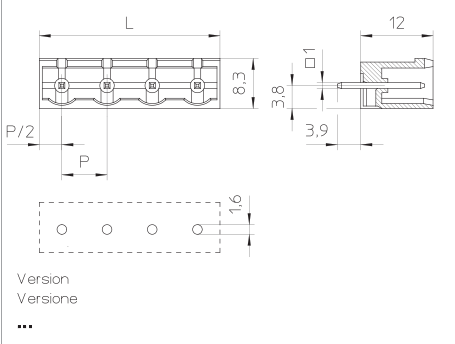


Version Versione			
SQ*			
P	L (mm)		
7,5	7,5 x p		
7,62	7,62 x p		

CPM..A

CPM..SQ*A

Single block · Blocco unico
Monobloc · Einzelblock

Poles · Poli · Pôles · Polzahl 2/12

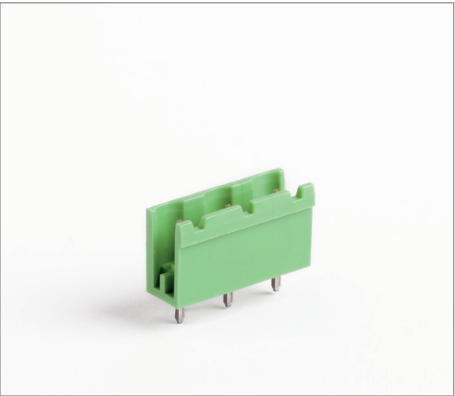


7,5 - 7,62
500
20

Ta MAX: 55	/	ULT: 160
PA - UL 94 V0		

V	A	mm²/AWG
500	18	0,2 ÷ 2,5
500	20	0,2 ÷ 2,5
300	16	24 ÷ 12

min 2 - max 12		
VE	/ on demand	GR GR1 NE AR BL RO GI
D/B4		

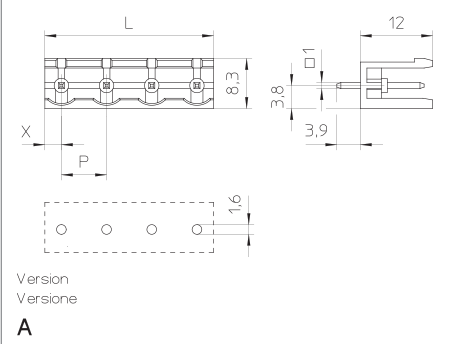

Version Versione			
SQ*A			
P	L (mm)	X	
7,5	(7,5 x p)-2	2,75	
7,62	(7,62 x p)-2	2,81	