

TERMINAL BLOCKS FOR P.C.B.  
 SCREWLESS

MORSETTI PER C.S.  
 MOLLA


BLOCS DE JONCTION C.I.  
 RESSORT

PRINTKLEMMEN  
 FEDERKRAFT

CTL

Single block · Blocco unico  
 Monobloc · Einzelblock

Poles · Poli · Pôles · Polzahl
 2/4

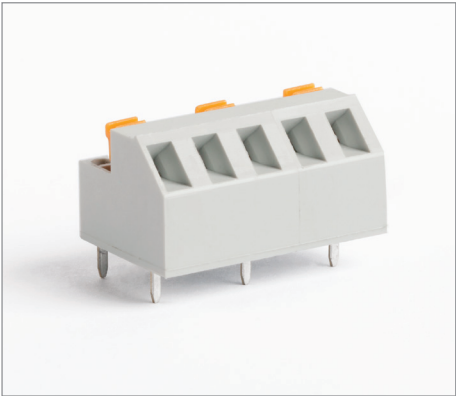

|                                     |                                         |    |
|-------------------------------------|-----------------------------------------|----|
| Pitch<br>Pas                        | Passo<br>Rastermaß                      | mm |
| Rated Voltage<br>Tension nominale   | Tensione nominale<br>Bemessungsspannung | V  |
| Rated Current<br>Intensité nominale | Corrente nominale<br>Bemessungsstrom    | A  |

|                                           |                                       |            |
|-------------------------------------------|---------------------------------------|------------|
| Types of cables<br>Type du conducteur     | Tipo cavi<br>Leitungstypen            |            |
| Nominal cross section<br>Section nominale | Sezione nominale<br>Nennquerschnitt   | mm²<br>AWG |
| Stripping lenght<br>Longueur de dénudage  | Lunghezza spelatura<br>Abisolierlänge | mm         |

|                            |                                 |    |
|----------------------------|---------------------------------|----|
| Temperature<br>Température | Temperatura<br>Temperatur       | °C |
| Housing<br>Corps isolant   | Corpo isolante<br>Isolierkörper |    |

|                                                                                     |     |                      |
|-------------------------------------------------------------------------------------|-----|----------------------|
|  | IMQ | EN60998              |
|   | VDE | EN60998              |
|   | cUL | UL1059 + C22.2 n°158 |

|                     |                  |   |
|---------------------|------------------|---|
| Poles<br>Pôles      | Poli<br>Polzahl  | X |
| Colours<br>Couleurs | Colori<br>Farben | Y |

|                                                 |                                 |
|-------------------------------------------------|---------------------------------|
| How to order<br>Référence de commande           | Ordinazione<br>Bestellschlüssel |
| CTL 5,08 / X ... Y N...                         |                                 |
| Type Pitch Poles Version Colors Printing        |                                 |
| Tipo Passo Poli Versione Colori Numerazione     |                                 |
| Type Pas Pôles Version Couleurs Marquage        |                                 |
| Typ Rastermaß Polzahl Version Farben Bedruckung |                                 |

|       |
|-------|
| 10,16 |
| 630   |
| 10    |

|                                                                                   |                                                                                   |                                                                                    |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
|  |  |  |
| 0,5 ÷ 1,5<br>22 ÷ 16                                                              | 22 ÷ 16                                                                           | 22 ÷ 18                                                                            |
| 10                                                                                |                                                                                   |                                                                                    |
| 110                                                                               |                                                                                   |                                                                                    |
| PA - UL 94 V0                                                                     |                                                                                   |                                                                                    |

|     |    |               |
|-----|----|---------------|
| V   | A  | mm²/AWG       |
| 750 | 10 | 0,5 ÷ 1,5 (S) |
| 750 | 10 | 0,5 ÷ 1,5 (S) |
| 300 | 10 | 22 ÷ 16 (S)   |

|                                      |
|--------------------------------------|
| min 2 - max 4                        |
| GR / on demand VE GR1 NE AR BL RO GI |

