


CTR14P5_2-7Vxx



CTR14P5_2-7Vxx

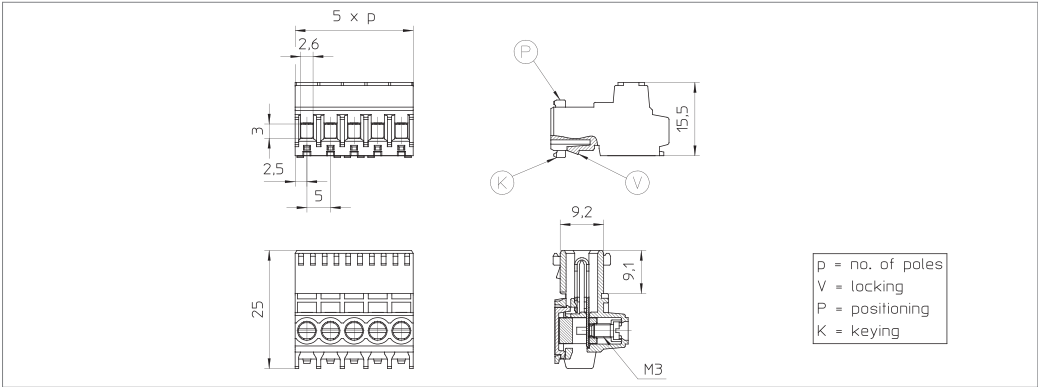

How to order

CTR14	P5	/ XX	Vxxx	Y
Type	Pitch	Poles	Keying	Colours

Colours

NA / on demand GR GR1 NE AR BL RO GI VE BI

Technical Data

Materials	Housing: PA G - UL94 V0_GWT 750 °C compliant to Norm EN60335-1 Contacts: Copper Alloy / Sn Clamp: Copper Alloy / Ni Captive screw (M3): Steel / Zn	Mechanical Data	Torque 0,5 Nm Solid wire: 0,2-4 mm² Stranded wire: 0,2-2,5 mm² Stripping length: 7-8 mm	Electrical data	Rated current: 10 A Rated voltage: 250 V CTI: 400 V (Material Group II) Insulation distances: > = 4 mm Temperature range: -40 °C ÷ +120 °C
------------------	---	------------------------	--	------------------------	--

Notes VDE & UL approvals in progress

Options


CTR1 IN DIFFERENT COLOURS



CTR14 IN DIFFERENT COLOURS



LABELS ON DEMAND

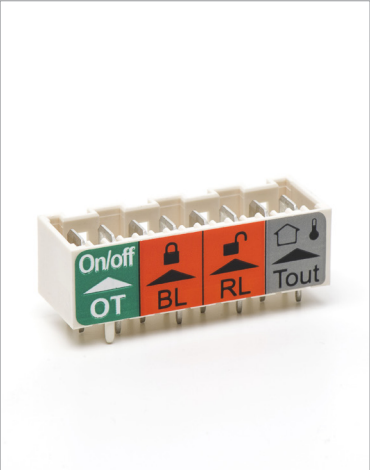

EARTH OR FIRST IN / LAST OUT CONTACT

