


RAST 5 SERIES

HEADER VERTICAL & HORIZONTAL


CTR1P5_2 -12Vxx

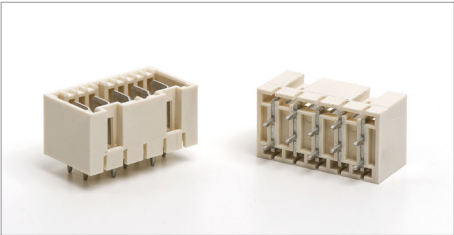


CTR1P5_2 -12Vxx

VERSION: ...

Vertical

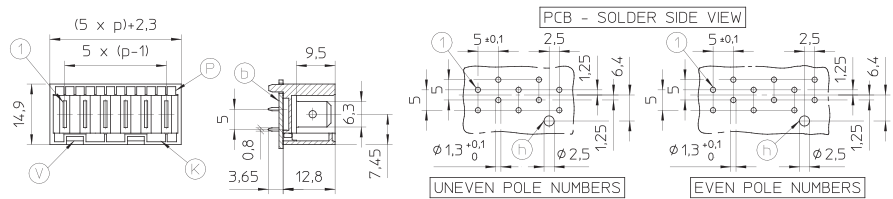


CTR1P5_2 -12SQVxx

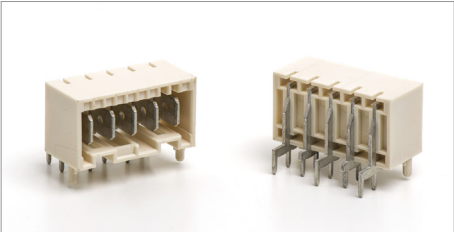


CTR1P5_2 -12SQVxx

VERSION: SQ

90 Degrees

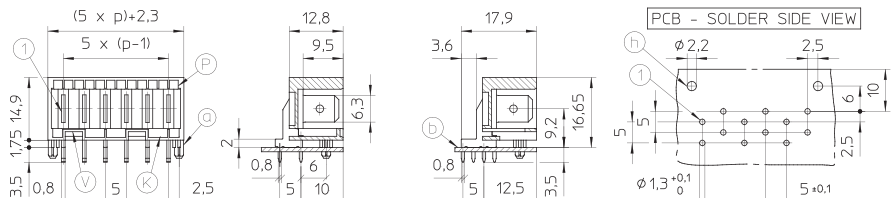


CTR1P5_2 -12SQWPVxx

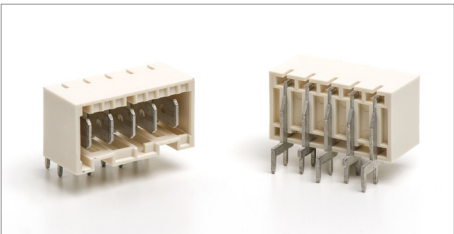


CTR1P5_2-12SQWPVxx

VERSION: SQ WP

90 Degrees w/o peg

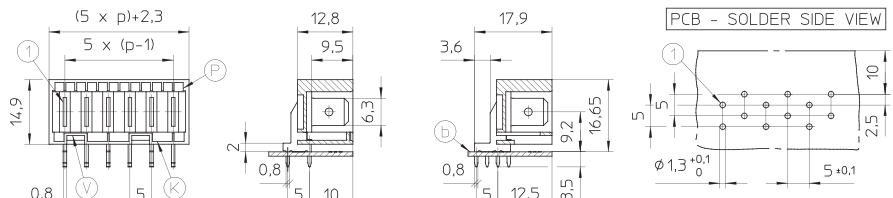


CTR1P5_2 -12SQLVxx

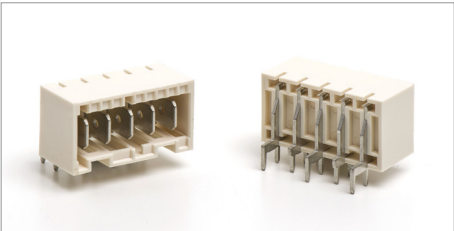


CTR1P5 2-12SQLVxx

VERSION: SQL

90 Degrees low

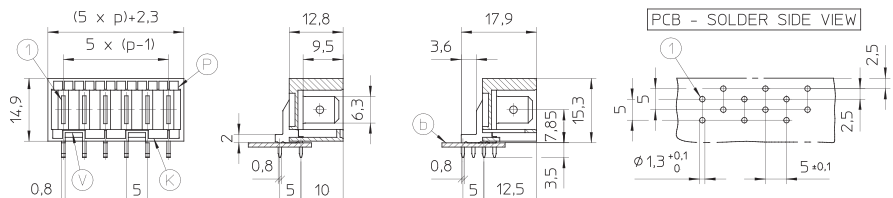


CTR1P5_2 -12SQLRVxx

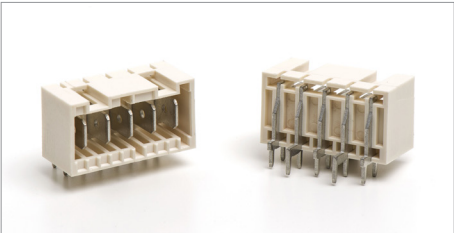

CTR1P5_2 -12SQLRVxx

VERSION: SQLR

90 Degrees low reverse

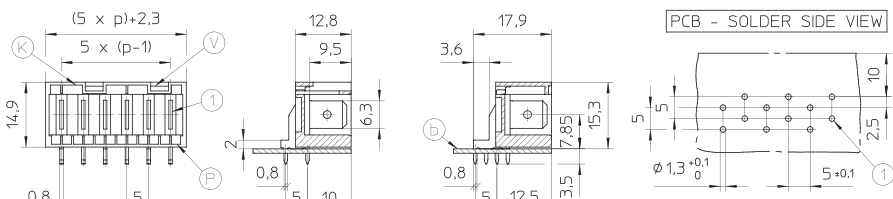

1: first contact / **a**: spigot / **b**: PCB / **h**: hole for positioning of the spigot
Keying V: space for locking / **P**: positioning / **K**: keying

How to order

CTR1	P5	/ XX	x..	Vxxx	Y
Type	Pitch	Poles	Version	Keying	Colours

Colours

NA / on demand GR GR1 NE AR BL RO GI VE BI

Technical Data

Materials

Housing: PA G - UL94 V0 _ GWT 750 °C
compliant to Norm EN60335-1

Contact tabs: 6,3 x 0,8 mm
Copper Alloy / Ni + Sn

Electrical data

Rated current: 10 A
Rated voltage: 250 V
Impulse withstand voltage: 2,5 kV

Insulation distances: ≥ 4 mm

Temperature range: -40 °C ÷ +120 °C