

FEMALE PLUG
RISING CLAMP

CONNETTORI FEMMINA
CARRELLO


CONNECTEURS FEMELLE
ÉTRIER REMONTANT

STECKERTEIL
LIFTPRINZIP

Pitch Pas	Passo Rastermaß	mm
Rated Voltage Tension nominale	Tensione nominale Bemessungsspannung	V
Rated Current Intensité nominale	Corrente nominale Bemessungsstrom	A
Types of cables Type du conducteur	Tipo cavi Leitungstypen	
Nominal cross section Section nominale	Sezione nominale Nennquerschnitt	mm² AWG
Stripping lenght Longueur de dénudage	Lunghezza spelatura Abisolierlänge	mm
Torque Couple de serrage	Coppia di torsione Drehmoment	Nm Lb-in
Temperature Température	Temperatura Temperatur	°C
Housing Corps isolant	Corpo isolante Isolierkörper	
Captive Screw Vis Imperdable	Vite Imperdibile Unverlierbare Schraube	
		mm

	IMQ	EN61984
	VDE	EN61984
	cUL	UL1059 + C22.2 n°158
Poles Pôles	Poli Polzahl	X
Colours Couleurs	Colori Farben	Y

How to order Référence de commande		Ordinazione Bestellschlüssel			
CUF	5	/ X	V01	Y	N...
Type	Pitch	Poles	Version	Colors	Printing
Tipo	Passo	Poli	Versione	Colori	Numerazione
Type	Pas	Pôles	Version	Couleurs	Marquage
Typ	Rastermaß	Polzahl	Version	Farben	Bedruckung

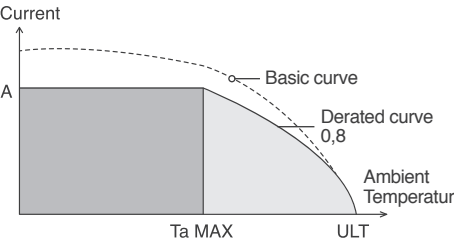


Ta MAX: Max Ambient Temperature to perform nominal values
ULT: Upper Limit Temperature

CUF

Single block · Blocco unico
Monobloc · Einzelblock

Poles · Poli · Pôles · Polzahl

2/36 (5)
2/18 (10)

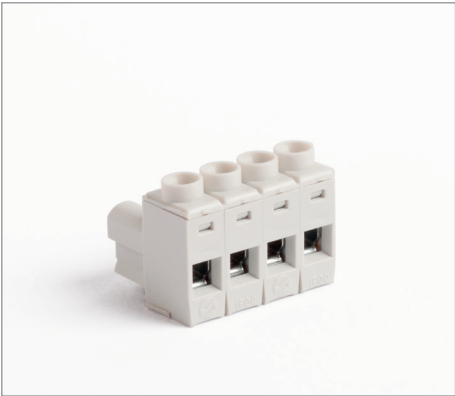

5 - 10		
250 - 500		
16		
		
0,2 ÷ 2,5 24 ÷ 12	0,2 ÷ 2,5 24 ÷ 12	0,2 ÷ 2,5 24 ÷ 12
7		
0,5	/	4
Ta MAX: 50	/	ULT: 130
PC - UL 94 V0		
M2,5		
	0,6 x 3,5	

V		A	mm²/AWG
250 (5)	500 (10)	16	0,2 ÷ 2,5
300		14	24 ÷ 12
min 2 - max 36 (pitch 5) / max 18 (pitch 10)			
GR / on demand NE			

