

HEADERS
FOR P.C.B.

CONNETTORI MASCHIO
PER C.S.

CONNECTEURS MÂLE
POUR C.I.


STIFTLEISTE
FÜR LEITERPLATTEN

Pitch Pas	Passo Rastermaß	mm
Rated Voltage Tension nominale	Tensione nominale Bemessungsspannung	V
Rated Current Intensité nominale	Corrente nominale Bemessungsstrom	A
Temperature Température	Temperatura Temperatur	°C
Housing Corps isolant	Corpo isolante Isolierkörper	

	IMQ	EN61984
	VDE	EN61984
	cUL	UL1059 + C22.2 n°158

Poles Pôles	Poli Polzahl	X
Colours Couleurs	Colori Farben	Y
Other information Autres données	Altri dati Weitere Informationen	p.

How to order Référence de commande		Ordinazione Bestellschlüssel			
CUM		5	/ X	...	Y N...
Type	Pitch	Poles	Version	Colors	Printing
Tipo	Passo	Poli	Versione	Colori	Numerazione
Type	Pas	Pôles	Version	Couleurs	Marquage
Typ	Rastermaß	Polzahl	Version	Farben	Bedruckung

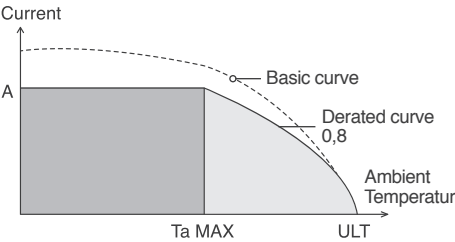


Ta MAX: Max Ambient Temperature to perform nominal values
ULT: Upper Limit Temperature
*SQ Version = Horizontal version

CUM

Single block · Blocco unico
Monobloc · Einzelblock

Poles · Poli · Pôles · Polzahl

2/36 (5)
2/18 (10)

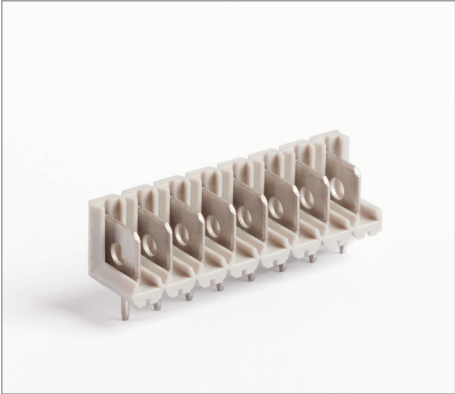

5 - 10	
250 - 500	
16	
Ta MAX: 50 / ULT: 130	
PC - UL 94 V0	

V	A	mm²/AWG
250 (5)	500 (10)	16
300	14	24 ÷ 12

min 2 - max 36 (pitch 5) / max 18 (pitch 10)	
GR	/ on demand NE
D/B4	

