

TERMINAL BLOCKS FOR P.C.B.
 WIRE PROTECTION

MORSETTI PER C.S.
 LINGUETTA

BLOCS DE JONCTION C.I.
 LANGUETTE

PRINTKLEMMEN
 DRAHTSCHUTZ

Pitch Pas	Passo Rastermaß	mm
Rated Voltage Tensione nominale	Tensione nominale Bemessungsspannung	V
Rated Current Intensité nominale	Corrente nominale Bemessungsstrom	A

Types of cables Type du conducteur	Tipo cavi Leitungstypen	
Nominal cross section Section nominale	Sezione nominale Nennquerschnitt	mm² AWG
Stripping lenght Longueur de dénudage	Lunghezza spelatura Abisolierlänge	mm
Torque Couple de serrage	Coppia di torsione Drehmoment	Nm Lb-in
Temperature Température	Temperatura Temperatur	°C
Housing Corps isolant	Corpo isolante Isolierkörper	
Screw Vis	Vite Schraube	
		mm

	IMQ	EN60998
	VDE	EN60998
	cUL	UL1059 + C22.2 n°158

Poles Pôles	Poli Polzahl	X
Colours Couleurs	Colori Farben	Y

How to order Référence de commande		Ordinazione Bestellschlüssel			
MRT12 5	/ X	...	Y	N...	
Type	Pitch	Poles	Version	Colors	Printing
Tipo	Passo	Poli	Versione	Colori	Numerazione
Type	Pas	Pôles	Version	Couleurs	Marquage
Typ	Rastermaß	Polzahl	Version	Farben	Bedruckung

MRT12

Single block · Blocco unico
 Monobloc · Einzelblock

Poles · Poli · Pôles · Polzahl

2/12

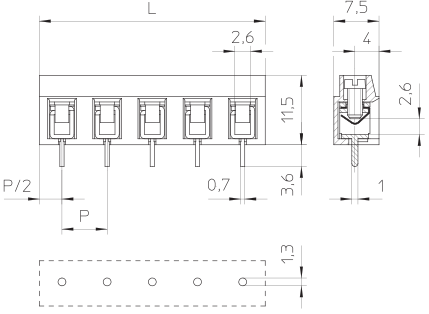


7,5
500
24

		
0,5 ÷ 4 30 ÷ 12	0,5 ÷ 2,5 30 ÷ 12	0,5 ÷ 2,5 30 ÷ 12
6		
0,4	/	3
110		
PA - UL 94 V0		
M2,5		
	0,6 x 3,5	

V	A	mm²/AWG
750	24	0,5 ÷ 2,5
750	24	0,5 ÷ 2,5
300	16	30 ÷ 14

min 2 - max 12		
VE	/ on demand	GR GR1 NE AR BL RO GI

					
Version Versione ...	<table> <tr> <td>P</td><td>L (mm)</td></tr> <tr> <td>7.5</td><td>7.5 x p</td></tr> </table>	P	L (mm)	7.5	7.5 x p
P	L (mm)				
7.5	7.5 x p				

MRT12..V01

Single block · Blocco unico
 Monobloc · Einzelblock

Poles · Poli · Pôles · Polzahl

2

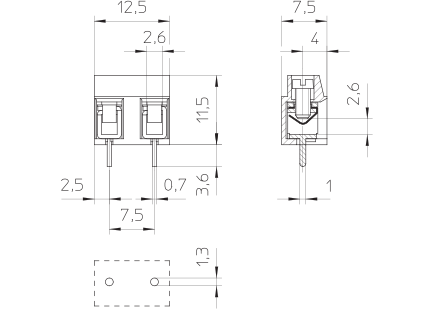


7,5
500
24

		
0,5 ÷ 4 30 ÷ 12	0,5 ÷ 2,5 30 ÷ 12	0,5 ÷ 2,5 30 ÷ 12
6		
0,4	/	3
110		
PA - UL 94 V0		
M2,5		
	0,6 x 3,5	

V	A	mm²/AWG
750	24	0,5 ÷ 2,5
750	24	0,5 ÷ 2,5
300	16	30 ÷ 14

2		
VE	/ on demand	GR GR1 NE AR BL RO GI

	
Version Versione	V01

*SQ Version = Horizontal version