

TERMINAL BLOCKS FOR P.C.B.
 RISING CLAMP

MORSETTI PER C.S.
 CARRELLO

BLOCS DE JONCTION C.I.
 ÉTRIER REMONTANT

PRINTKLEMMEN
 LIFTPRINZIP

Pitch Pas	Passo Rastermaß	mm
Rated Voltage Tensione nominale	Tensione nominale Bemessungsspannung	V
Rated Current Intensité nominale	Corrente nominale Bemessungsstrom	A

Types of cables Type du conducteur	Tipo cavi Leitungstypen	
Nominal cross section Section nominale	Sezione nominale Nennquerschnitt	mm² AWG
Stripping lenght Longueur de dénudage	Lunghezza spelatura Abisolierlänge	mm
Torque Couple de serrage	Coppia di torsione Drehmoment	Nm Lb-in
Temperature Température	Temperatura Temperatur	°C
Housing Corps isolant	Corpo isolante Isolierkörper	
Captive Screw Vis Imperdable	Vite Imperdibile Unverlierbare Schraube	
		mm

	IMQ	EN60998
	VDE	EN60998
	cUL	UL1059 + C22.2 n°158

Poles Pôles	Poli Polzahl	X
Colours Couleurs	Colori Farben	Y

How to order Référence de commande	Ordinazione Bestellschlüssel
MRT15 P5 / X	SQ Y N...
Type Pitch Poles Version Colors Printing	
Tipo Passo Poli Versione Colori Numerazione	
Type Pas Pôles Version Couleurs Marquage	
Typ Rastermaß Polzahl Version Farben Bedruckung	

MRT15
 MRT15..SQ*

Single block · Blocco unico
 Monobloc · Einzelblock

Poles · Poli · Pôles · Polzahl

2/12




10 - 10,16
630
20

0,2 ÷ 4 30 ÷ 12	0,2 ÷ 2,5 30 ÷ 12	0,2 ÷ 2,5 30 ÷ 12
6		
0,5	/	5
110		
PA - UL 94 V0		
M3		
⊕	0,6 x 3,5	

V	A	mm²/AWG
750	24	0,5 ÷ 2,5
750	20	0,5 ÷ 2,5
300	16	30 ÷ 12

min 2 - max 12
VE / on demand GR GR1 NE AR BL RO GI

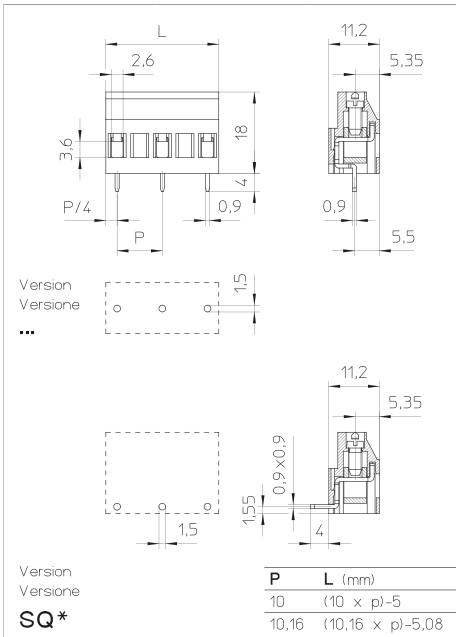

MRT15..DP

Single block · Blocco unico
 Monobloc · Einzelblock

Poles · Poli · Pôles · Polzahl

2/12




10 - 10,16
630
20

0,2 ÷ 4 30 ÷ 12	0,2 ÷ 2,5 30 ÷ 12	0,2 ÷ 2,5 30 ÷ 12
6		
0,5	/	5
110		
PA - UL 94 V0		
M3		
⊕	0,6 x 3,5	

V	A	mm²/AWG
750	24	0,5 ÷ 2,5
750	20	0,5 ÷ 2,5
300	16	30 ÷ 12

min 2 - max 12
VE / on demand GR GR1 NE AR BL RO GI

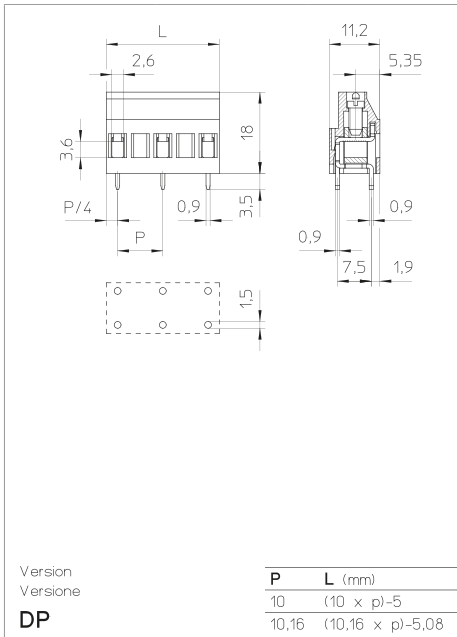

*SQ Version = Horizontal version