

TERMINAL BLOCKS FOR P.C.B.
 RISING CLAMP

MORSETTI PER C.S.
 CARRELLO

BLOCS DE JONCTION C.I.
 ÉTRIER REMONTANT

PRINTKLEMMEN
 LIFTPRINZIP

Pitch Pas	Passo Rastermaß	mm
Rated Voltage Tensione nominale	Tensione nominale Bemessungsspannung	V
Rated Current Intensité nominale	Corrente nominale Bemessungsstrom	A

Types of cables Type du conducteur	Tipo cavi Leitungstypen	
Nominal cross section Section nominale	Sezione nominale Nennquerschnitt	mm² AWG
Stripping lenght Longueur de dénudage	Lunghezza spelatura Abisolierlänge	mm
Torque Couple de serrage	Coppia di torsione Drehmoment	Nm Lb-in
Temperature Température	Temperatura Temperatur	°C
Housing Corps isolant	Corpo isolante Isolierkörper	
Captive Screw Vis Imperdabile	Vite Imperdibile Unverlierbare Schraube	
		mm

	IMQ	EN60998
	VDE	EN60998
	cUL	UL1059 + C22.2 n°158

Poles Pôles	Poli Polzahl	X
Colours Couleurs	Colori Farben	Y

How to order Référence de commande	Ordinazione Bestellschlüssel
MRT18 P5,08 / X	V01 Y N...
Type Pitch Poles	Version Colors Printing
Tipo Passo Poli	Versione Colori Numerazione
Type Pas Pôles	Version Couleurs Marquage
Typ Rastermaß Polzahl	Version Farben Bedruckung

MRT18
 MRT18..V01

Interlocking modules · Modulo componibile
 Elements modulaires · Zusammensteckbare Blöcke

Poles · Poli · Pôles · Polzahl

2/3 (5,08)
 1/2 (10,16)




5,08 - 10,16
320 - 630
20

0,2 ÷ 4 30 ÷ 12	0,2 ÷ 2,5 30 ÷ 12	0,2 ÷ 2,5 30 ÷ 12
6		
0,5	/	5
110		
PA - UL 94 V0		
M3		
0,6 x 3,5		

V	A	mm²/AWG
450 (5,08)	750 (10,16)	20
450 (5,08)	750 (10,16)	20
300 (5,08 and 10,16)	20	30 ÷ 12

min 2 - max...
VE / on demand GR GR1 NE AR BL RO GI

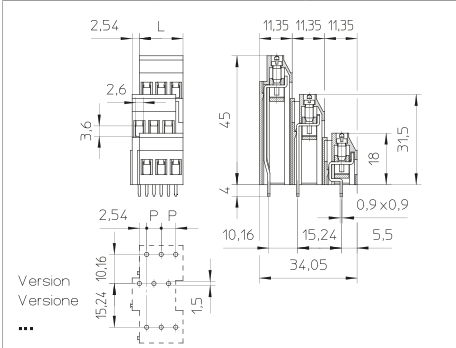

Version Versione	P	L (mm)
V01	5,08	5,08 x p
	10,16	(10,16 x p)-5,08

MRT18..V04
 MRT18..V05

Interlocking modules · Modulo componibile
 Elements modulaires · Zusammensteckbare Blöcke

Poles · Poli · Pôles · Polzahl

2/3 (5,08)
 1/2 (10,16)




5,08 - 10,16
320 - 630
20

0,2 ÷ 4 30 ÷ 12	0,2 ÷ 2,5 30 ÷ 12	0,2 ÷ 2,5 30 ÷ 12
6		
0,5	/	5
110		
PA - UL 94 V0		
M3		
0,6 x 3,5		

V	A	mm²/AWG
450 (5,08)	750 (10,16)	20
450 (5,08)	750 (10,16)	20
300 (5,08 and 10,16)	20	30 ÷ 12

min 2 - max...
VE / on demand GR GR1 NE AR BL RO GI

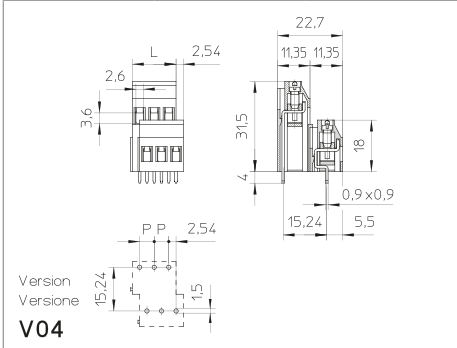

Version Versione	P	L (mm)
V04	5,08	5,08 x p
	10,16	(10,16 x p)-5,08

TERMINAL BLOCKS FOR P.C.B.
 RISING CLAMP

MORSETTI PER C.S.
 CARRELLO

BLOCS DE JONCTION C.I.
 ÉTRIER REMONTANT

PRINTKLEMMEN
 LIFTPRINZIP

Pitch Pas	Passo Rastermaß	mm
Rated Voltage Tensione nominale	Tensione nominale Bemessungsspannung	V
Rated Current Intensité nominale	Corrente nominale Bemessungsstrom	A

Types of cables Type du conducteur	Tipo cavi Leitungstypen	
Nominal cross section Section nominale	Sezione nominale Nennquerschnitt	mm² AWG
Stripping lenght Longueur de dénudage	Lunghezza spelatura Abisolierlänge	mm
Torque Couple de serrage	Coppia di torsione Drehmoment	Nm Lb-in
Temperature Température	Temperatura Temperatur	°C
Housing Corps isolant	Corpo isolante Isolierkörper	
Captive Screw Vis Imperdabile	Vite Imperdibile Unverlierbare Schraube	
		mm

	IMQ	EN60998
	VDE	EN60998
	cUL	UL1059 + C22.2 n°158

Poles Pôles	Poli Polzahl	X
Colours Couleurs	Colori Farben	Y

How to order Référence de commande	Ordinazione Bestellschlüssel
MRT18 P5,08 / X	V01 Y N...
Type Pitch Poles	Version Colors Printing
Tipo Passo Poli	Versione Colori Numerazione
Type Pas Pôles	Version Couleurs Marquage
Typ Rastermaß Polzahl	Version Farben Bedruckung

MRT18..V02

MRT18..V03

Interlocking modules · Modulo componibile
 Elements modulaires · Zusammensteckbare Blöcke

Poles · Poli · Pôles · Polzahl
 2/3 (5,08)
 1/2 (10,16)




5,08 - 10,16
320 - 630
20

0,2 ÷ 4 30 ÷ 12	0,2 ÷ 2,5 30 ÷ 12	0,2 ÷ 2,5 30 ÷ 12
6		
0,5	/	5
110		
PA - UL 94 V0		
M3		
0,6 x 3,5		

V	A	mm²/AWG
450 (5,08)	750 (10,16)	20
450 (5,08)	750 (10,16)	20
300 (5,08 and 10,16)	20	30 ÷ 12

min 2 - max...
VE / on demand GR GR1 NE AR BL RO GI

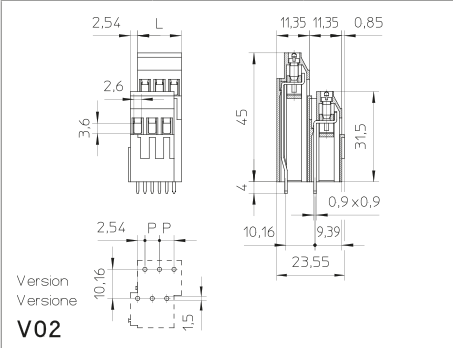

P	L (mm)
5,08	5,08 x p
10,16	(10,16 x p)-5,08

MRT18..V06

MRT18..V07

MRT18..V08

Interlocking modules · Modulo componibile
 Elements modulaires · Zusammensteckbare Blöcke

Poles · Poli · Pôles · Polzahl
 2/3 (5,08)
 1/2 (10,16)




5,08 - 10,16
320 - 630
20

0,2 ÷ 4 30 ÷ 12	0,2 ÷ 2,5 30 ÷ 12	0,2 ÷ 2,5 30 ÷ 12
6		
0,5	/	5
110		
PA - UL 94 V0		
M3		
0,6 x 3,5		

V	A	mm²/AWG
450 (5,08)	750 (10,16)	20
450 (5,08)	750 (10,16)	20
300 (5,08 and 10,16)	20	30 ÷ 12

min 2 - max...
VE / on demand GR GR1 NE AR BL RO GI

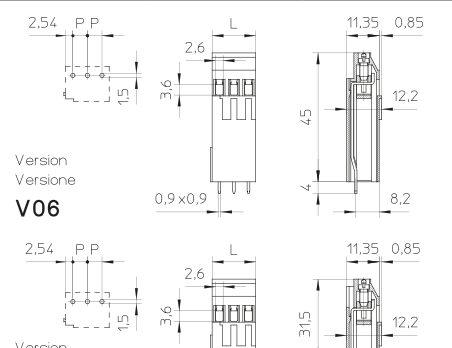

P	L (mm)
5,08	5,08 x p
10,16	(10,16 x p)-5,08