

HEADERS  
FOR P.C.B.

CONNETTORI MASCHIO  
PER C.S.

CONNECTEURS MÂLE  
POUR C.I.

STIFTLEISTE  
FÜR LEITERPLATTEN


|                                     |                                         |    |
|-------------------------------------|-----------------------------------------|----|
| Pitch<br>Pas                        | Passo<br>Rastermaß                      | mm |
| Rated Voltage<br>Tensione nominale  | Tensione nominale<br>Bemessungsspannung | V  |
| Rated Current<br>Intensité nominale | Corrente nominale<br>Bemessungsstrom    | A  |

|                            |                                 |    |
|----------------------------|---------------------------------|----|
|                            |                                 |    |
|                            |                                 |    |
|                            |                                 |    |
|                            |                                 |    |
| Temperature<br>Température | Temperatura<br>Temperatur       | °C |
| Housing<br>Corps isolant   | Corpo isolante<br>Isolierkörper |    |
|                            |                                 |    |

|                                                                                     |     |                      |
|-------------------------------------------------------------------------------------|-----|----------------------|
|  | IMQ | EN61984              |
|   | VDE | EN61984              |
|   | cUL | UL1059 + C22.2 n°158 |

|                                     |                                     |    |
|-------------------------------------|-------------------------------------|----|
| Poles<br>Pôles                      | Poli<br>Polzahl                     | X  |
| Colours<br>Couleurs                 | Colori<br>Farben                    | Y  |
| Other information<br>Autres données | Altri dati<br>Weitere Informationen | p. |

|                                       |                                             |
|---------------------------------------|---------------------------------------------|
| How to order<br>Référence de commande | Ordinazione<br>Bestellschlüssel             |
| MRT215                                | / X ... Y N...                              |
| Type                                  | Pitch Poles Version Colors Printing         |
| Tipo                                  | Passo Poli Versione Colori Numerazione      |
| Type                                  | Pas Pôles Version Couleurs Marquage         |
| Typ                                   | Rastermaß Polzahl Version Farben Bedruckung |

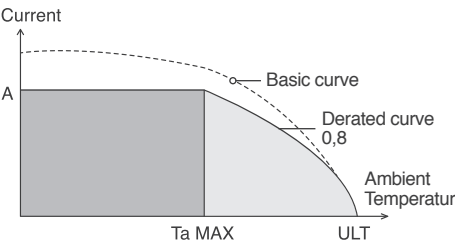

Ta MAX: Max Ambient Temperature to perform nominal values  
ULT: Upper Limit Temperature

\*SQ Version = Horizontal version


MRT21

MRT21..SQ\*

Interlocking modules · Modulo componibile  
Elements modulaires · Zusammensteckbare Blöcke

Poles · Poli · Pôles · Polzahl

2/3

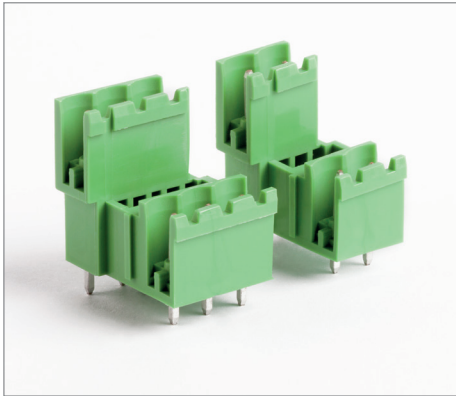




|     |
|-----|
| 5   |
| 300 |
| 20  |

|               |   |          |
|---------------|---|----------|
|               |   |          |
|               |   |          |
|               |   |          |
|               |   |          |
| Ta MAX: 55    | / | ULT: 160 |
| PA - UL 94 V0 |   |          |
|               |   |          |

|     |    |           |
|-----|----|-----------|
| V   | A  | mm²/AWG   |
| 300 | 18 | 0,2 ÷ 2,5 |
| 300 | 20 | 0,2 ÷ 2,5 |
| 300 | 12 | 30 ÷ 12   |

|                 |             |                       |
|-----------------|-------------|-----------------------|
| min 2 - max ... |             |                       |
| VE              | / on demand | GR GR1 NE AR BL RO GI |
| D/B4            |             |                       |

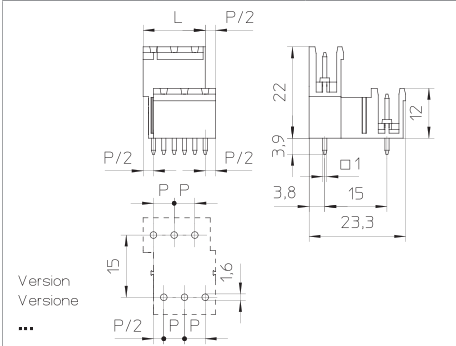

|                            |                                                                                     |                                                                                      |
|----------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| Version<br>Versione<br>... |  |  |
|                            | P                                                                                   | L (mm)                                                                               |
|                            | 5                                                                                   | 5 x p                                                                                |

SQ\*


MRT21

MRT21..SQ\*

Interlocking modules · Modulo componibile  
Elements modulaires · Zusammensteckbare Blöcke

Poles · Poli · Pôles · Polzahl

2/3

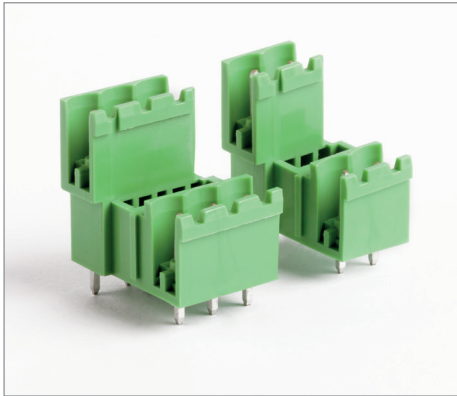




|      |
|------|
| 5,08 |
| 300  |
| 20   |

|               |   |          |
|---------------|---|----------|
|               |   |          |
|               |   |          |
|               |   |          |
|               |   |          |
| Ta MAX: 55    | / | ULT: 160 |
| PA - UL 94 V0 |   |          |
|               |   |          |

|     |    |           |
|-----|----|-----------|
| V   | A  | mm²/AWG   |
| 300 | 18 | 0,2 ÷ 2,5 |
| 300 | 20 | 0,2 ÷ 2,5 |
| 300 | 12 | 30 ÷ 12   |

|                 |             |                       |
|-----------------|-------------|-----------------------|
| min 2 - max ... |             |                       |
| VE              | / on demand | GR GR1 NE AR BL RO GI |
| D/B4            |             |                       |

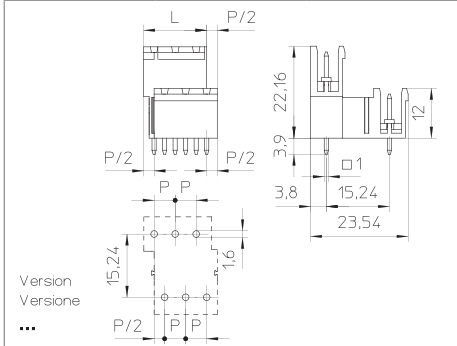

|                            |                                                                                       |                                                                                       |
|----------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Version<br>Versione<br>... |  |  |
|                            | P                                                                                     | L (mm)                                                                                |
|                            | 5,08                                                                                  | 5,08 x p                                                                              |

SQ\*