

FEMALE PLUG
RISING CLAMP

CONNETTORI FEMMINA
CARRELLO

CONNECTEURS FEMELLE
ÉTRIER REMONTANT

STECKERTEIL
LIFTPRINZIP


Pitch Pas	Passo Rastermaß	mm
Rated Voltage Tensione nominale	Tensione nominale Bemessungsspannung	V
Rated Current Intensité nominale	Corrente nominale Bemessungsstrom	A

Types of cables Type du conducteur	Tipo cavi Leitungstypen	
Nominal cross section Section nominale	Sezione nominale Nennquerschnitt	mm² AWG
Stripping lenght Longueur de dénudage	Lunghezza spelatura Abisolierlänge	mm
Torque Couple de serrage	Coppia di torsione Drehmoment	Nm Lb-in
Temperature Température	Temperatura Temperatur	°C
Housing Corps isolant	Corpo isolante Isolierkörper	
Captive Screw Vis Imperdable	Vite Imperdibile Unverlierbare Schraube	
		mm

	IMQ	EN61984
	VDE	EN61984
	cUL	UL1059 + C22.2 n°158

Poles Pôles	Poli Polzahl	X
Colours Couleurs	Colori Farben	Y

How to order Référence de commande	Ordinazione Bestellschlüssel
MRT22 P3,5 / X ... Y N...	
Type Pitch Poles Version Colors Printing	
Tipo Passo Poli Versione Colori Numerazione	
Type Pas Pôles Version Couleurs Marquage	
Typ Rastermaß Polzahl Version Farben Bedruckung	

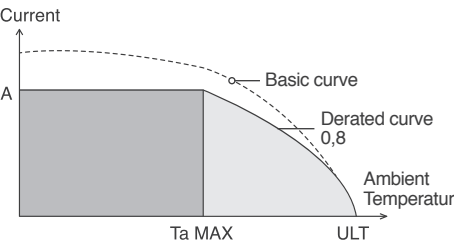


Ta MAX: Max Ambient Temperature to perform nominal values
ULT: Upper Limit Temperature

MRT22

Single block · Blocco unico
Monobloc · Einzelblock

Poles · Poli · Pôles · Polzahl

2/20

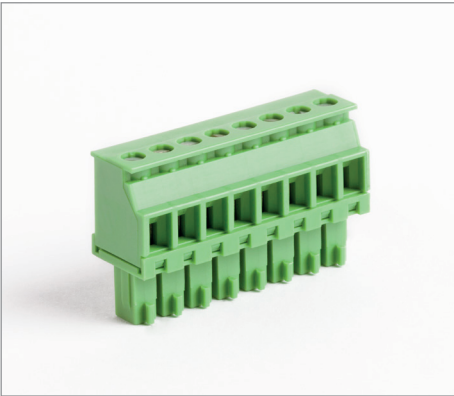


3,5 - 3,81
150
10

0,2 ÷ 1,0 30 ÷ 16	0,2 ÷ 1,0 30 ÷ 16	0,2 ÷ 1,0 30 ÷ 16
5		
0,3	/	3
Ta MAX: 60	/	ULT: 160
PA - UL 94 V0		
M2		
 0,5 x 3		

V	A	mm²/AWG
150	10	0,2 ÷ 1,0
150	8	0,2 ÷ 1,0
300	8	30 ÷ 16

min 2 - max 20		
VE / on demand GR GR1 NE AR BL RO GI		

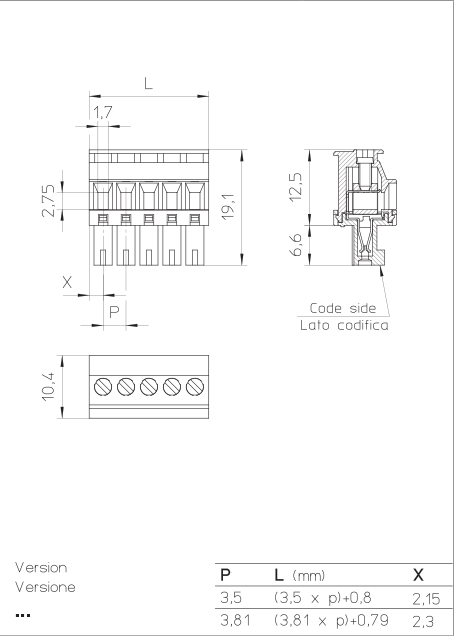

MRT22..V01

Single block · Blocco unico
Monobloc · Einzelblock

Poles · Poli · Pôles · Polzahl

2/20



3,5 - 3,81
150
10

0,2 ÷ 1,0 30 ÷ 16	0,2 ÷ 1,0 30 ÷ 16	0,2 ÷ 1,0 30 ÷ 16
5		
0,3	/	3
Ta MAX: 60	/	ULT: 160
PA - UL 94 V0		
M2		
 0,5 x 3		

V	A	mm²/AWG
150	10	0,2 ÷ 1,0
150	8	0,2 ÷ 1,0
300	8	30 ÷ 16

min 2 - max 20		
VE / on demand GR GR1 NE AR BL RO GI		

