

TERMINAL BLOCKS FOR P.C.B.
 SCREWLESS

MORSETTI PER C.S.
 MOLLA

BLOCS DE JONCTION C.I.
 RESSORT

PRINTKLEMMEN
 FEDERKRAFT

Pitch Pas	Passo Rastermaß	mm
Rated Voltage Tensione nominale	Tensione nominale Bemessungsspannung	V
Rated Current Intensité nominale	Corrente nominale Bemessungsstrom	A
Types of cables Type du conducteur	Tipo cavi Leitungstypen	
Nominal cross section Section nominale	Sezione nominale Nennquerschnitt	mm² AWG
Stripping lenght Longueur de dénudage	Lunghezza spelatura Abisolierlänge	mm
Temperature Température	Temperatura Temperatur	°C
Housing Corps isolant	Corpo isolante Isolierkörper	

	IMQ	EN60998
	VDE	EN60998
	cUL	UL1059 + C22.2 n°158

Poles Pôles	Poli Polzahl	X
Colours Couleurs	Colori Farben	Y
Other information Autres données	Altri dati Weitere Informationen	p.

How to order Référence de commande	Ordinazione Bestellschlüssel
MRT24 P3,5 / X	V04 Y N...
Type Pitch Poles Version Colors Printing	Tipo Passo Poli Versione Colori Numerazione
Type Pas Pôles Version Couleurs Marquage	Type Rastermaß Polzahl Version Farben Bedruckung

MRT24..V04
 MRT24..V05

Interlocking modules · Modulo componibile
 Elements modulaires · Zusammensteckbare Blöcke

Poles · Poli · Pôles · Polzahl


1



3,5 - 3,81
250
4
0,5 ÷ 1,5 30 ÷ 16
0,5 ÷ 1,5 30 ÷ 16
0,5 ÷ 1,5 30 ÷ 16
7
110
PA - UL 94 V0

V	A	mm²/AWG
250	4	0,5 ÷ 0,75
250	4	0,5 ÷ 0,75
300	4	30 ÷ 16

min 2 - max 24
GR / on demand VE GR1 NE AR BL RO GI
D/A3

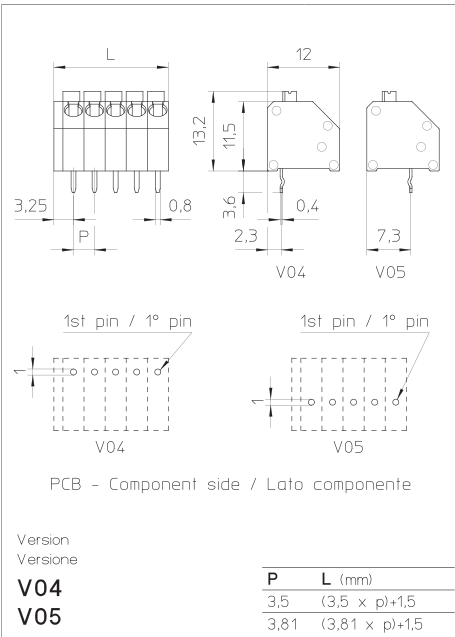

MRT24..V01
 MRT24..V02

Interlocking modules · Modulo componibile
 Elements modulaires · Zusammensteckbare Blöcke

Poles · Poli · Pôles · Polzahl

1



3,5 - 3,81
320
4
0,5 ÷ 1,5 30 ÷ 16
0,5 ÷ 1,5 30 ÷ 16
0,5 ÷ 1,5 30 ÷ 16
7
110
PA - UL 94 V0

V	A	mm²/AWG
450	4	0,5 ÷ 0,75
450	4	0,5 ÷ 0,75
300	4	30 ÷ 16

min 2 - max 24
GR / on demand VE GR1 NE AR BL RO GI
D/A3

