

FEMALE PLUG
SCREWLESS

CONNETTORI FEMMINA
MOLLA

CONNECTEURS FEMELLE
RESSORT


STECKERTEIL
FEDERKRAFT

Pitch Pas	Passo Rastermaß	mm
Rated Voltage Tensione nominale	Tensione nominale Bemessungsspannung	V
Rated Current Intensité nominale	Corrente nominale Bemessungsstrom	A
Types of cables Type du conducteur	Tipo cavi Leitungstypen	
Nominal cross section Section nominale	Sezione nominale Nennquerschnitt	mm² AWG
Stripping lenght Longueur de dénudage	Lunghezza spelatura Abisolierlänge	mm
Temperature Température	Temperatura Temperatur	°C
Housing Corps isolant	Corpo isolante Isolierkörper	

	IMQ	EN61984
	VDE	EN61984
	cUL	UL1059 + C22.2 n°158

Poles Pôles	Poli Polzahl	X
Colours Couleurs	Colori Farben	Y

How to order Référence de commande	Ordinazione Bestellschlüssel
MRT30 P5 / X ... Y N...	
Type Pitch Poles Version Colors Printing	
Tipo Passo Poli Versione Colori Numerazione	
Type Pas Pôles Version Couleurs Marquage	
Typ Rastermaß Polzahl Version Farben Bedruckung	

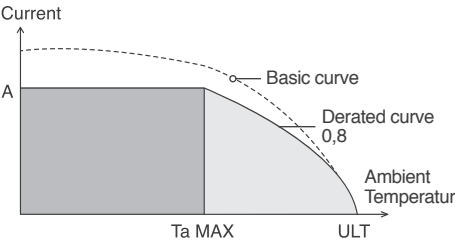


Ta MAX: Max Ambient Temperature to perform nominal values
ULT: Upper Limit Temperature

MRT30

Single block · Blocco unico
Monobloc · Einzelblock

Poles · Poli · Pôles · Polzahl


2/24

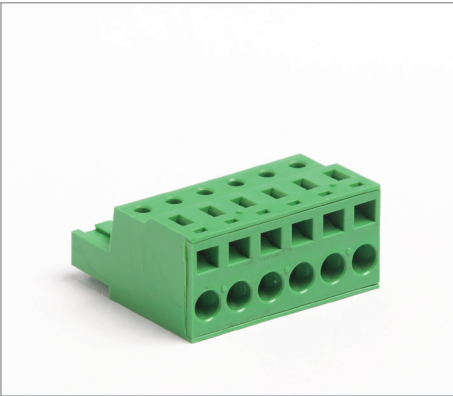

5 - 5,08
300 (250 V 13 ÷ 24 POLES)
18
0,2 ÷ 2,5 24 ÷ 14
0,2 ÷ 2,5 24 ÷ 14
0,2 ÷ 2,5 24 ÷ 14
8
Ta MAX: 75 / ULT: 160
PA - UL 94 V0

V	A	mm²/AWG
300	18	0,2 ÷ 2,5
300	18	0,2 ÷ 2,5
300	14	24 ÷ 14

min 2 - max 24
VE / on demand GR GR1 NE AR BL RO GI

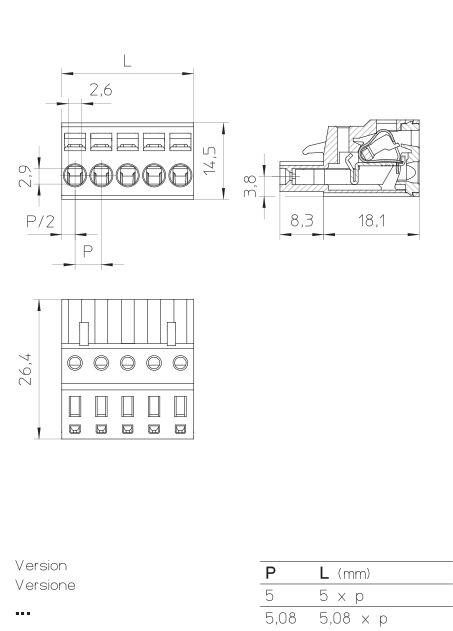


MRT30..FV

Single block · Blocco unico
Monobloc · Einzelblock

Poles · Poli · Pôles · Polzahl

2/20

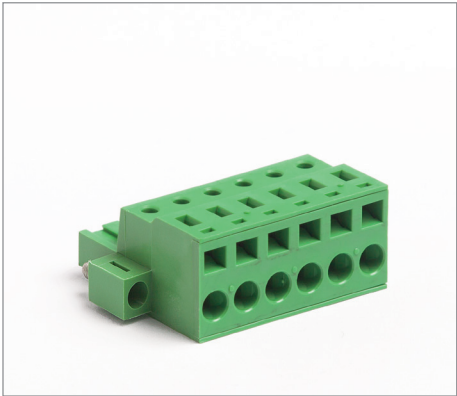

5 - 5,08
300 (250 V 13 ÷ 24 POLES)
18
0,2 ÷ 2,5 24 ÷ 14
0,2 ÷ 2,5 24 ÷ 14
0,2 ÷ 2,5 24 ÷ 14
8
Ta MAX: 75 / ULT: 160
PA - UL 94 V0

V	A	mm²/AWG
300	18	0,2 ÷ 1,5
300	18	0,2 ÷ 1,5
300	14	24 ÷ 14

min 2 - max 20
VE / on demand GR GR1 NE AR BL RO GI

