

FEMALE PLUG
RISING CLAMP

CONNETTORI FEMMINA
CARRELLO

CONNECTEURS FEMELLE
ÉTRIER REMONTANT

STECKERTEIL
LIFTPRINZIP


Pitch Pas	Passo Rastermaß	mm
Rated Voltage Tensione nominale	Tensione nominale Bemessungsspannung	V
Rated Current Intensité nominale	Corrente nominale Bemessungsstrom	A

Types of cables Type du conducteur	Tipo cavi Leitungstypen	
Nominal cross section Section nominale	Sezione nominale Nennquerschnitt	mm² AWG
Stripping lenght Longueur de dénudage	Lunghezza spelatura Abisolierlänge	mm
Torque Couple de serrage	Coppia di torsione Drehmoment	Nm Lb-in
Temperature Température	Temperatura Temperatur	°C
Housing Corps isolant	Corpo isolante Isolierkörper	
Captive Screw Vis Imperdable	Vite Imperdibile Unverlierbare Schraube	
		mm

	IMQ	EN61984
	VDE	EN61984
	cUL	UL1059 + C22.2 n°158

Poles Pôles	Poli Polzahl	X
Colours Couleurs	Colori Farben	Y

How to order Référence de commande		Ordinazione Bestellschlüssel			
MRT3 5	/ X	...	Y	N...	
Type	Pitch	Poles	Version	Colors	Printing
Tipo	Passo	Poli	Versione	Colori	Numerazione
Type	Pas	Pôles	Version	Couleurs	Marquage
Typ	Rastermaß	Polzahl	Version	Farben	Bedruckung

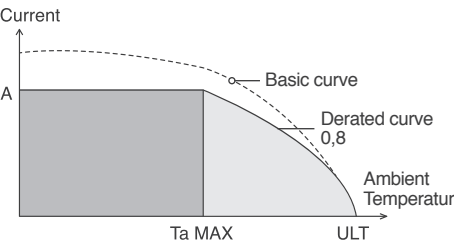


Ta MAX: Max Ambient Temperature to perform nominal values
ULT: Upper Limit Temperature

MRT3

Single block · Blocco unico
Monobloc · Einzelblock

Poles · Poli · Pôles · Polzahl

2/12

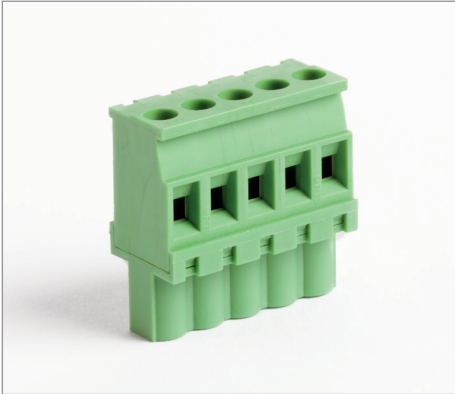


10 - 10,16		
600		
20		

		
0,2 ÷ 2,5 30 ÷ 12	0,2 ÷ 2,5 30 ÷ 12	0,2 ÷ 2,5 30 ÷ 12
7		
0,5	/	5
Ta MAX: 55 / ULT: 160		
PA - UL 94 V0		
M3		
 0,6 x 3,5		

V	A	mm²/AWG
600	20	0,2 ÷ 2,5
300	12	30 ÷ 12

min 2 - max 12		
		

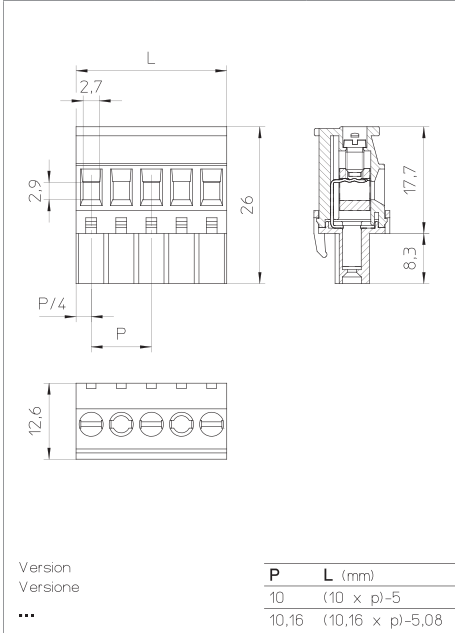

Version
Versione
...


P	L (mm)
10	(10 x p)-5
10,16	(10,16 x p)-5,08

MRT3..FV

Single block · Blocco unico
Monobloc · Einzelblock

Poles · Poli · Pôles · Polzahl

2/10

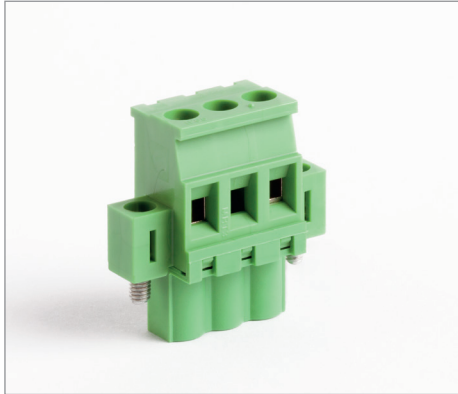


10 - 10,16		
600		
20		

		
0,2 ÷ 2,5 30 ÷ 12	0,2 ÷ 2,5 30 ÷ 12	0,2 ÷ 2,5 30 ÷ 12
7		
0,5	/	5
Ta MAX: 55 / ULT: 160		
PA - UL 94 V0		
M3		
 0,6 x 3,5		

V	A	mm²/AWG
600	20	0,2 ÷ 2,5
300	12	30 ÷ 12

min 2 - max 10		
		

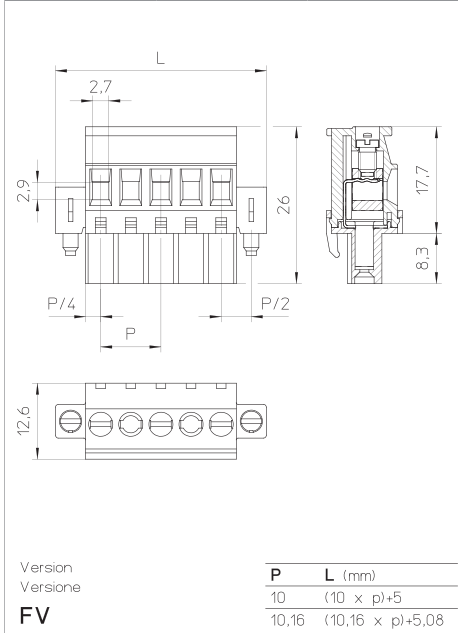

Version
Versione
FV

P	L (mm)
10	(10 x p)+5
10,16	(10,16 x p)+5,08

FEMALE PLUG
RISING CLAMP

CONNETTORI FEMMINA
CARRELLO

CONNECTEURS FEMELLE
ÉTRIER REMONTANT


STECKERTEIL
LIFTPRINZIP

Pitch Pas	Passo Rastermaß	mm
Rated Voltage Tensione nominale	Tensione nominale Bemessungsspannung	V
Rated Current Intensité nominale	Corrente nominale Bemessungsstrom	A
Types of cables Type du conducteur	Tipo cavi Leitungstypen	
Nominal cross section Section nominale	Sezione nominale Nennquerschnitt	mm² AWG
Stripping lenght Longueur de dénudage	Lunghezza spelatura Abisolierlänge	mm
Torque Couple de serrage	Coppia di torsione Drehmoment	Nm Lb-in
Temperature Température	Temperatura Temperatur	°C
Housing Corps isolant	Corpo isolante Isolierkörper	
Captive Screw Vis Imperdable	Vite Imperdibile Unverlierbare Schraube	
		mm

	IMQ	EN61984
	VDE	EN61984
	cUL	UL1059 + C22.2 n°158

Poles Pôles	Poli Polzahl	X
Colours Couleurs	Colori Farben	Y

How to order Référence de commande		Ordinazione Bestellschlüssel			
MRT3 5	/ X	...	Y	N...	
Type	Pitch	Poles	Version	Colors	Printing
Tipo	Passo	Poli	Versione	Colori	Numerazione
Type	Pas	Pôles	Version	Couleurs	Marquage
Typ	Rastermaß	Polzahl	Version	Farben	Bedruckung

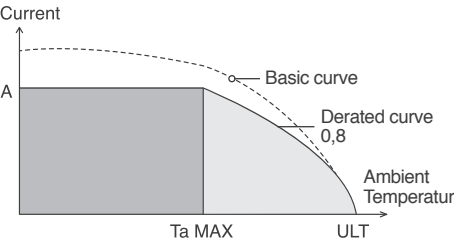


Ta MAX: Max Ambient Temperature to perform nominal value
ULT: Upper Limit Temperature

MRT3..V01

Single block · Blocco unico
Monobloc · Einzelblock

Poles · Poli · Pôles · Polzahl


2/12

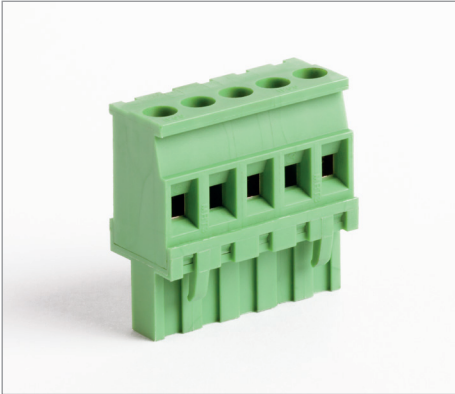

10 - 10,16		
600		
20		
0,2 ÷ 2,5 30 ÷ 12	0,2 ÷ 2,5 30 ÷ 12	0,2 ÷ 2,5 30 ÷ 12
7		
0,5	/	5
Ta MAX: 55 / ULT: 160		
PA - UL 94 V0		
M3		
0,6 x 3,5		

V	A	mm²/AWG
600	20	0,2 ÷ 2,5
300	12	30 ÷ 12

min 2 - max 12		
VE / on demand GR GR1 NE AR BL RO GI		

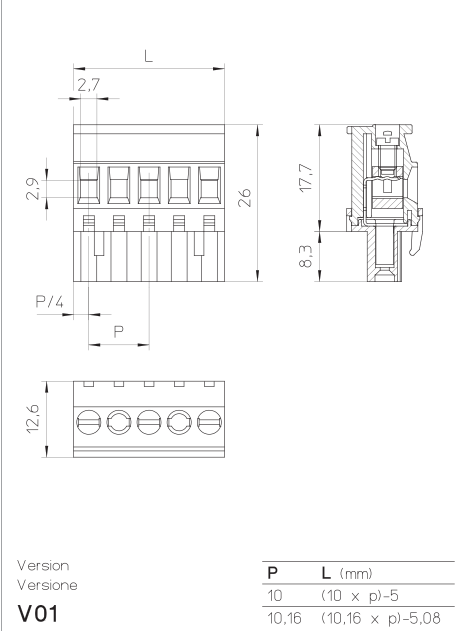


MRT3..FV V01

Single block · Blocco unico
Monobloc · Einzelblock

Poles · Poli · Pôles · Polzahl

2/10

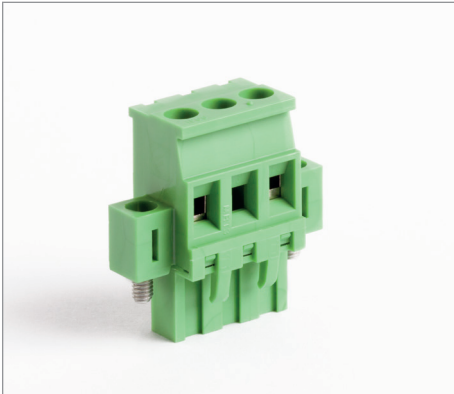

10 - 10,16		
600		
20		
0,2 ÷ 2,5 30 ÷ 12	0,2 ÷ 2,5 30 ÷ 12	0,2 ÷ 2,5 30 ÷ 12
7		
0,5	/	5
Ta MAX: 55 / ULT: 160		
PA - UL 94 V0		
M3		
0,6 x 3,5		

V	A	mm²/AWG
600	20	0,2 ÷ 2,5
300	12	30 ÷ 12

min 2 - max 10		
VE / on demand GR GR1 NE AR BL RO GI		

