

FEMALE PLUG
SCREWLESS

CONNETTORI FEMMINA
MOLLA


CONNECTEURS FEMELLE
RESSORT

STECKERTEIL
FEDERKRAFT

Pitch Pas	Passo Rastermaß	mm
Rated Voltage Tensione nominale	Tensione nominale Bemessungsspannung	V
Rated Current Intensité nominale	Corrente nominale Bemessungsstrom	A
Types of cables Type du conducteur	Tipo cavi Leitungstypen	
Nominal cross section Section nominale	Sezione nominale Nennquerschnitt	mm² AWG
Stripping lenght Longueur de dénudage	Lunghezza spelatura Abisolierlänge	mm
Temperature Température	Temperatura Temperatur	°C
Housing Corps isolant	Corpo isolante Isolierkörper	

	IMQ	EN61984
	VDE	EN61984
	cUL	UL1059 + C22.2 n°158
Poles Pôles	Poli Polzahl	X
Colours Couleurs	Colori Farben	Y

How to order Référence de commande	Ordinazione Bestellschlüssel
MRT38 P3,81 / X ... Y N...	
Type Pitch Poles Version Colors Printing	
Tipo Passo Poli Versione Colori Numerazione	
Type Pas Pôles Version Couleurs Marquage	
Typ Rastermaß Polzahl Version Farben Bedruckung	

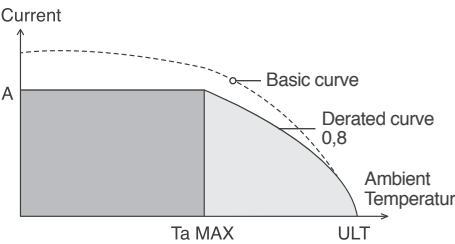


Ta MAX: Max Ambient Temperature to perform nominal values
ULT: Upper Limit Temperature

MRT38

Single block · Blocco unico
Monobloc · Einzelblock

Poles · Poli · Pôles · Polzahl


2/20

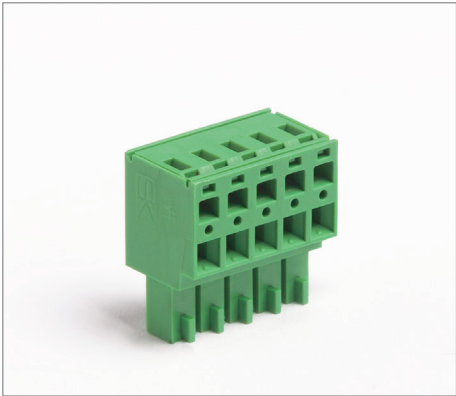

3,81
150
12
0,2 ÷ 1,5 24 ÷ 16
0,2 ÷ 1,5 24 ÷ 16
0,2 ÷ 1,5 24 ÷ 16
8
Ta MAX: 60 / ULT: 160
PA - UL 94 V0

V	A	mm²/AWG
150	12	0,2 ÷ 1,5
150	12	0,2 ÷ 1,5
300	8	24 ÷ 16

min 2 - max 20								
VE	/ on demand	GR	GR1	NE	AR	BL	RO	GI

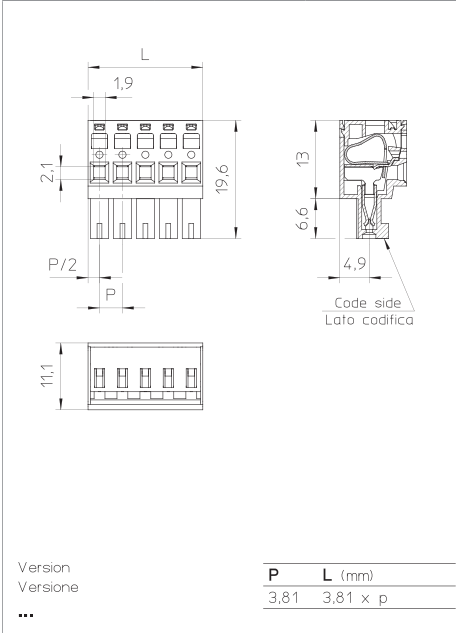


MRT38..FV

Single block · Blocco unico
Monobloc · Einzelblock

Poles · Poli · Pôles · Polzahl


2/20

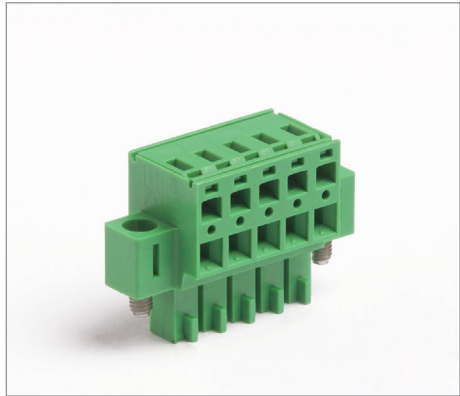

3,81
150
12
0,2 ÷ 1,5 24 ÷ 16
0,2 ÷ 1,5 24 ÷ 16
0,2 ÷ 1,5 24 ÷ 16
8
Ta MAX: 60 / ULT: 160
PA - UL 94 V0

V	A	mm²/AWG
150	12	0,2 ÷ 1,5
150	12	0,2 ÷ 1,5
300	8	24 ÷ 16

min 2 - max 20								
VE	/ on demand	GR	GR1	NE	AR	BL	RO	GI

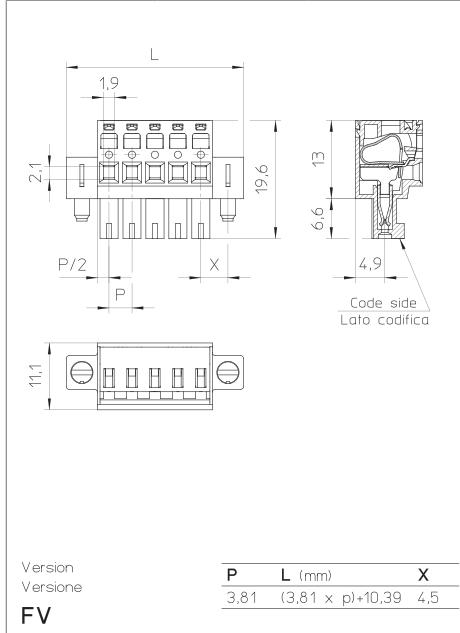

FEMALE PLUG
SCREWLESS

CONNETTORI FEMMINA
MOLLA

CONNECTEURS FEMELLE
RESSORT


STECKERTEIL
FEDERKRAFT

Pitch Pas	Passo Rastermaß	mm
Rated Voltage Tensione nominale	Tensione nominale Bemessungsspannung	V
Rated Current Intensité nominale	Corrente nominale Bemessungsstrom	A
Types of cables Type du conducteur	Tipo cavi Leitungstypen	
Nominal cross section Section nominale	Sezione nominale Nennquerschnitt	mm² AWG
Stripping lenght Longueur de dénudage	Lunghezza spelatura Abisolierlänge	mm
Temperature Température	Temperatura Temperatur	°C
Housing Corps isolant	Corpo isolante Isolierkörper	

	IMQ	EN61984
	VDE	EN61984
	cUL	UL1059 + C22.2 n°158

Poles Pôles	Poli Polzahl	X
Colours Couleurs	Colori Farben	Y

How to order Référence de commande		Ordinazione Bestellschlüssel			
MRT38	P7,62	/ X	FV	Y	N...
Type	Pitch	Poles	Version	Colors	Printing
Tipo	Passo	Poli	Versione	Colori	Numerazione
Type	Pas	Pôles	Version	Couleurs	Marquage
Typ	Rastermaß	Polzahl	Version	Farben	Bedruckung

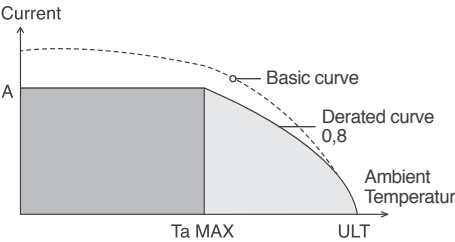


Ta MAX: Max Ambient Temperature to perform nominal values
ULT: Upper Limit Temperature

MRT38..V01

Single block · Blocco unico
Monobloc · Einzelblock

Poles · Poli · Pôles · Polzahl


2/20

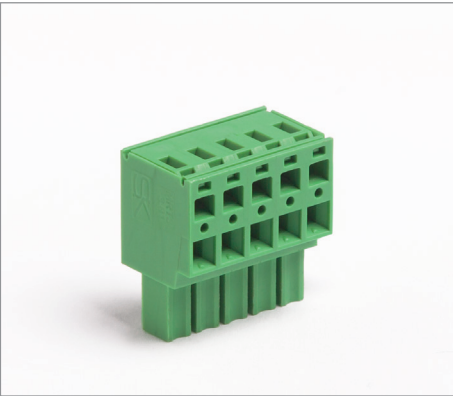

3,81		
150		
12		
		
0,2 ÷ 1,5 24 ÷ 16	0,2 ÷ 1,5 24 ÷ 16	0,2 ÷ 1,5 24 ÷ 16
8		
Ta MAX: 60 / ULT: 160		
110		
PA - UL 94 V0		

V	A	mm²/AWG
150	12	0,2 ÷ 1,5
150	12	0,2 ÷ 1,5
300	8	24 ÷ 16

min 2 - max 20		
VE / on demand GR GR1 NE AR BL RO GI		

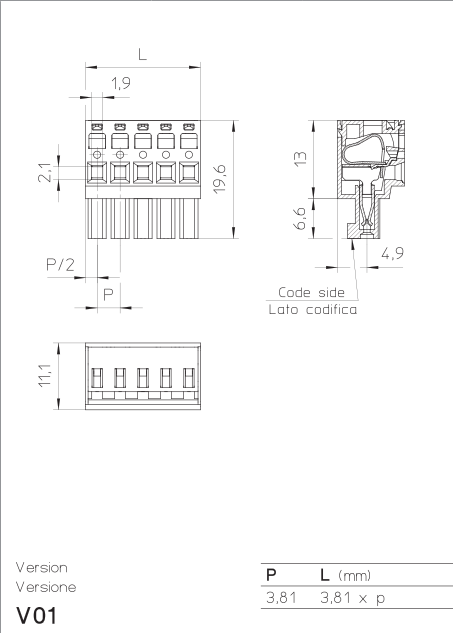


MRT38..FV V01

Single block · Blocco unico
Monobloc · Einzelblock

Poles · Poli · Pôles · Polzahl

2/20

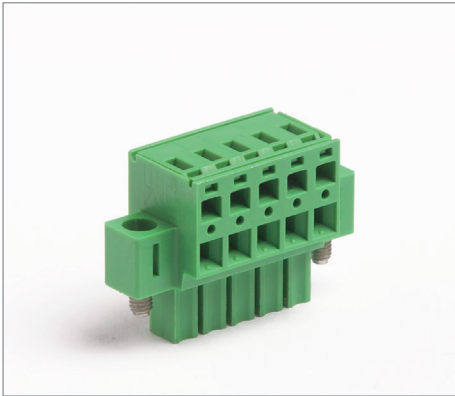

3,81		
150		
12		
		
0,2 ÷ 1,5 24 ÷ 16	0,2 ÷ 1,5 24 ÷ 16	0,2 ÷ 1,5 24 ÷ 16
8		
Ta MAX: 60 / ULT: 160		
110		
PA - UL 94 V0		

V	A	mm²/AWG
150	12	0,2 ÷ 1,5
150	12	0,2 ÷ 1,5
300	8	24 ÷ 16

min 2 - max 20		
VE / on demand GR GR1 NE AR BL RO GI		

