

FEMALE PLUG
SCREWLESS

CONNETTORI FEMMINA
MOLLA

CONNECTEURS FEMELLE
RESSORT


STECKERTEIL
FEDERKRAFT

Pitch Pas	Passo Rastermaß	mm
Rated Voltage Tensione nominale	Tensione nominale Bemessungsspannung	V
Rated Current Intensité nominale	Corrente nominale Bemessungsstrom	A
Types of cables Type du conducteur	Tipo cavi Leitungstypen	
Nominal cross section Section nominale	Sezione nominale Nennquerschnitt	mm² AWG
Stripping lenght Longueur de dénudage	Lunghezza spelatura Abisolierlänge	mm
Temperature Température	Temperatura Temperatur	°C
Housing Corps isolant	Corpo isolante Isolierkörper	

	IMQ	EN61984
	VDE	EN61984
	cUL	UL1059 + C22.2 n°158

Poles Pôles	Poli Polzahl	X
Colours Couleurs	Colori Farben	Y

How to order Référence de commande		Ordinazione Bestellschlüssel			
MRT38	P7,62	/ X	FV	Y	N...
Type	Pitch	Poles	Version	Colors	Printing
Tipo	Passo	Poli	Versione	Colori	Numerazione
Type	Pas	Pôles	Version	Couleurs	Marquage
Typ	Rastermaß	Polzahl	Version	Farben	Bedruckung

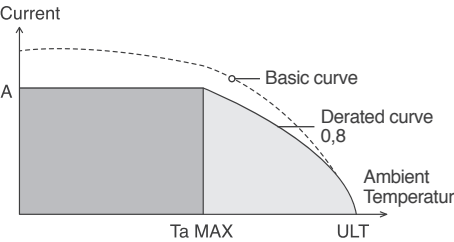


Ta MAX: Max Ambient Temperature to perform nominal values
ULT: Upper Limit Temperature


MRT38

Single block · Blocco unico
Monobloc · Einzelblock

Poles · Poli · Pôles · Polzahl


2/10

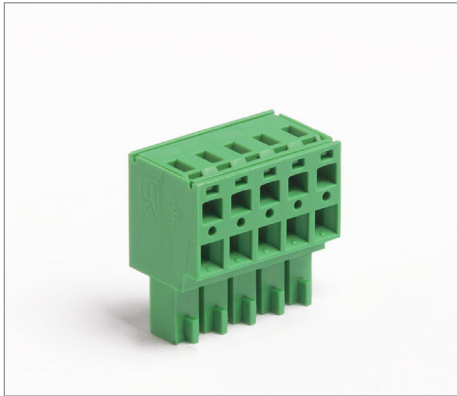

7,62		
500		
12		
		
0,2 ÷ 1,5 24 ÷ 16	0,2 ÷ 1,5 24 ÷ 16	0,2 ÷ 1,5 24 ÷ 16
8		
Ta MAX: 60 / ULT: 160		
110		
PA - UL 94 V0		

V	A	mm²/AWG
500	12	0,2 ÷ 1,5
500	12	0,2 ÷ 1,5
300	8	24 ÷ 16

min 2 - max 10		
VE / on demand GR GR1 NE AR BL RO GI		

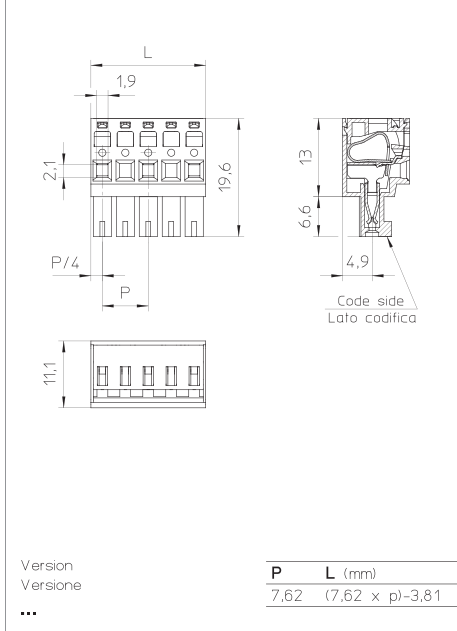


Version Versione	P	L (mm)
...	7,62	(7,62 x p)-3,81

MRT38..FV

Single block · Blocco unico
Monobloc · Einzelblock

Poles · Poli · Pôles · Polzahl


2/10

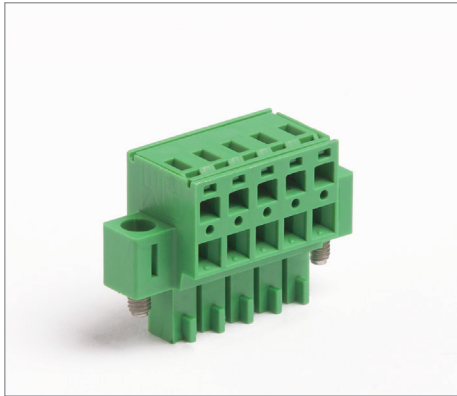

7,62		
500		
12		
		
0,2 ÷ 1,5 24 ÷ 16	0,2 ÷ 1,5 24 ÷ 16	0,2 ÷ 1,5 24 ÷ 16
8		
Ta MAX: 60 / ULT: 160		
110		
PA - UL 94 V0		

V	A	mm²/AWG
500	12	0,2 ÷ 1,5
500	12	0,2 ÷ 1,5
300	8	24 ÷ 16

min 2 - max 10		
VE / on demand GR GR1 NE AR BL RO GI		

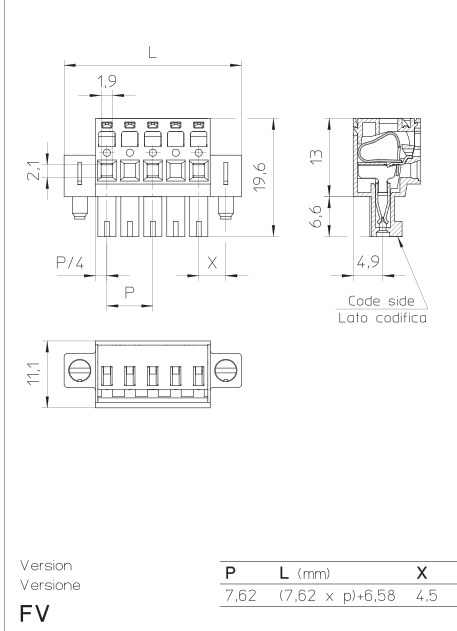

Version Versione	P	L (mm)	X
FV	7,62	(7,62 x p)+6,58	4,5

FEMALE PLUG
SCREWLESS

CONNETTORI FEMMINA
MOLLA


CONNECTEURS FEMELLE
RESSORT

STECKERTEIL
FEDERKRAFT

Pitch Pas	Passo Rastermaß	mm
Rated Voltage Tensione nominale	Tensione nominale Bemessungsspannung	V
Rated Current Intensité nominale	Corrente nominale Bemessungsstrom	A
Types of cables Type du conducteur	Tipo cavi Leitungstypen	
Nominal cross section Section nominale	Sezione nominale Nennquerschnitt	mm² AWG
Stripping lenght Longueur de dénudage	Lunghezza spelatura Abisolierlänge	mm
Temperature Température	Temperatura Temperatur	°C
Housing Corps isolant	Corpo isolante Isolierkörper	

	IMQ	EN61984
	VDE	EN61984
	cUL	UL1059 + C22.2 n°158
Poles Pôles	Poli Polzahl	X
Colours Couleurs	Colori Farben	Y

How to order Référence de commande	Ordinazione Bestellschlüssel
MRT38 P7,62 / X	FV Y N...
Type Pitch Poles Version Colors Printing	Tipo Passo Poli Versione Colori Numerazione
Type Pas Pôles Version Couleurs Marquage	Type Rastermaß Polzahl Version Farben Bedruckung

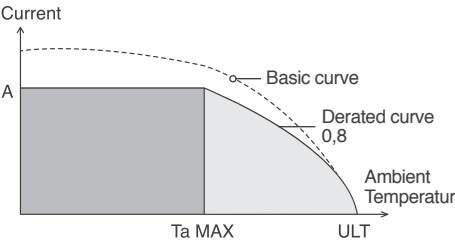


Ta MAX: Max Ambient Temperature to perform nominal values
ULT: Upper Limit Temperature

MRT38..V01

Single block · Blocco unico
Monobloc · Einzelblock

Poles · Poli · Pôles · Polzahl


2/10

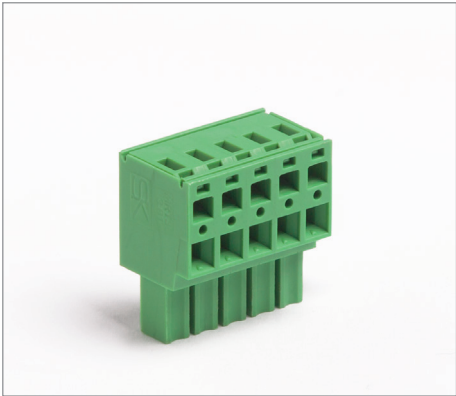

7,62		
500		
12		
		
0,2 ÷ 1,5 24 ÷ 16	0,2 ÷ 1,5 24 ÷ 16	0,2 ÷ 1,5 24 ÷ 16
8		
Ta MAX: 60	/	ULT: 160
110		
PA - UL 94 V0		

V	A	mm²/AWG
500	12	0,2 ÷ 1,5
500	12	0,2 ÷ 1,5
300	8	24 ÷ 16

min 2 - max 10								
VE	/ on demand	GR	GR1	NE	AR	BL	RO	GI

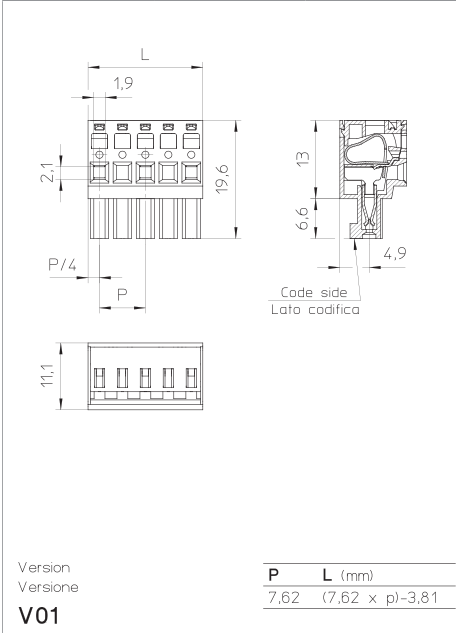

Version
Version
V01


P	L (mm)
7,62	(7,62 × p)-3,81

MRT38..FV V01

Single block · Blocco unico
Monobloc · Einzelblock

Poles · Poli · Pôles · Polzahl


2/10

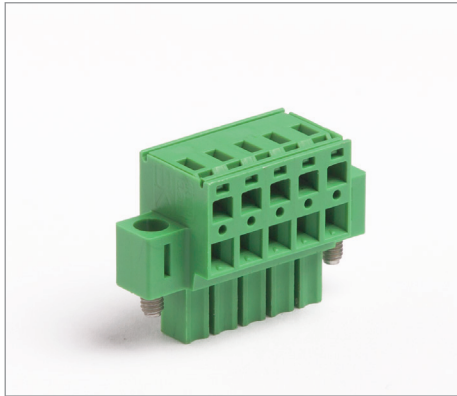

7,62		
500		
12		
		
0,2 ÷ 1,5 24 ÷ 16	0,2 ÷ 1,5 24 ÷ 16	0,2 ÷ 1,5 24 ÷ 16
8		
Ta MAX: 60 / ULT: 160		
PA - UL 94 V0		

V	A	mm²/AWG
500	12	0,2 ÷ 1,5
500	12	0,2 ÷ 1,5
300	8	24 ÷ 16

min 2 - max 10								
VE	/ on demand	GR	GR1	NE	AR	BL	RO	GI

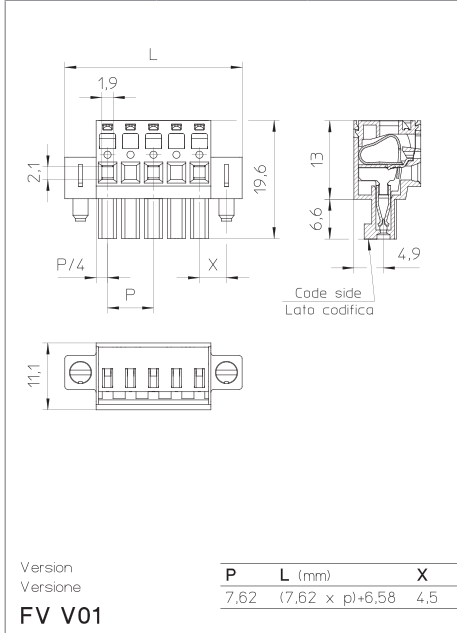

Version
Version
FV V01

P	L (mm)	X
7,62	(7,62 × p)+6,58	4,5