

MALE PLUG
SCREWLESS

CONNETTORI MASCHIO
A MOLLA

CONNECTEURS MÂLE
RESSORT


STECKERTEIL INVERTIERT
(STIFTKONTAKT)
FEDERKRAFT

Pitch Pas	Passo Rastermaß	mm
Rated Voltage Tensione nominale	Tensione nominale Bemessungsspannung	V
Rated Current Intensité nominale	Corrente nominale Bemessungsstrom	A
Types of cables Type du conducteur	Tipo cavi Leitungstypen	
Nominal cross section Section nominale	Sezione nominale Nennquerschnitt	mm² AWG
Stripping lenght Longueur de dénudage	Lunghezza spelatura Abisolierlänge	mm
Temperature Température	Temperatura Temperatur	°C
Housing Corps isolant	Corpo isolante Isolierkörper	

	IMQ	EN61984
	VDE	EN61984
	cUL	UL1059 + C22.2 n°158

Poles Pôles	Poli Polzahl	X
Colours Couleurs	Colori Farben	Y
Other information Autres données	Altri dati Weitere Informationen	p.

How to order Référence de commande	Ordinazione Bestellschlüssel
MRT40 P5,08 / X ... Y N...	
Type Pitch Poles Version Colors Printing	
Tipo Passo Poli Versione Colori Numerazione	
Type Pas Pôles Version Couleurs Marquage	
Typ Rastermaß Polzahl Version Farben Bedruckung	

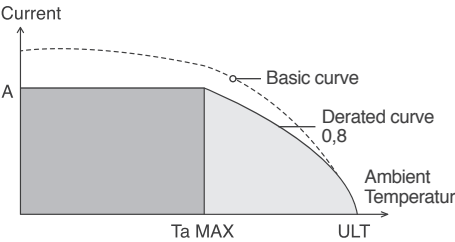


Ta MAX: Max Ambient Temperature to perform nominal values
ULT: Upper Limit Temperature

MRT40

Single block · Blocco unico
Monobloc · Einzelblock

Poles · Poli · Pôles · Polzahl


2/16

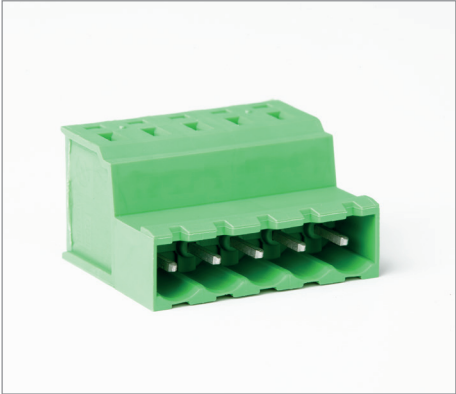

5,08
300
18
0,2 ÷ 2,5 24 ÷ 14
0,2 ÷ 2,5 24 ÷ 14
0,2 ÷ 2,5 24 ÷ 14
8
Ta MAX: 75 / ULT: 160
PA - UL 94 V0

V	A	mm²/AWG
300	18	0,2 ÷ 2,5
300	18	0,2 ÷ 2,5
300	14	24 ÷ 14

min 2 - max 16
VE / on demand GR GR1 NE AR BL RO GI
D/B5

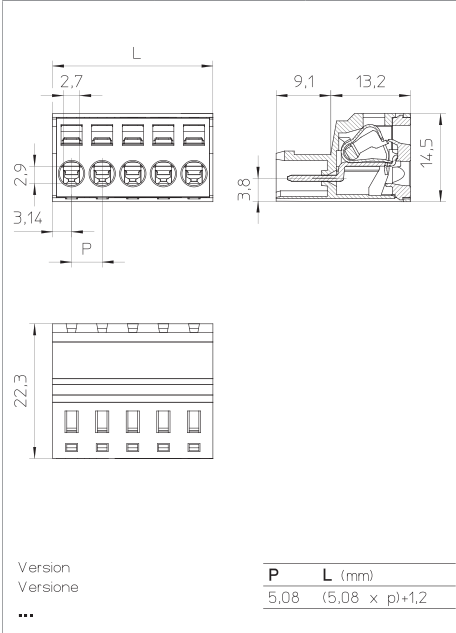

Version
Versione
...


P	L (mm)
5,08	(5,08 x p)+1,2

MRT40..A

Single block · Blocco unico
Monobloc · Einzelblock

Poles · Poli · Pôles · Polzahl


2/16

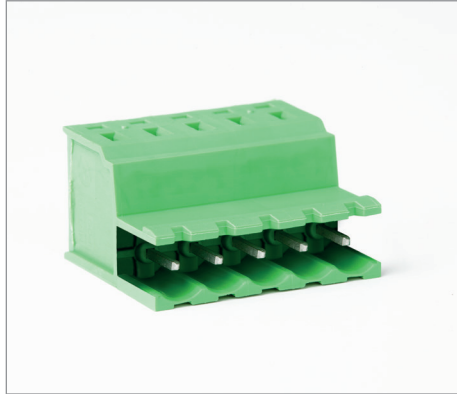

5,08
300
18
0,2 ÷ 2,5 24 ÷ 14
0,2 ÷ 2,5 24 ÷ 14
0,2 ÷ 2,5 24 ÷ 14
8
Ta MAX: 75 / ULT: 160
PA - UL 94 V0

V	A	mm²/AWG
300	18	0,2 ÷ 2,5
300	18	0,2 ÷ 2,5
300	14	24 ÷ 14

min 2 - max 16
VE / on demand GR GR1 NE AR BL RO GI
D/B5

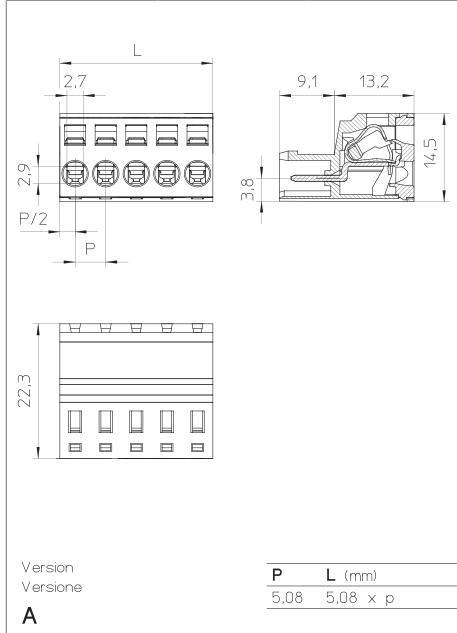

Version
Versione
A

P	L (mm)
5,08	5,08 x p

MALE PLUG
SCREWLESS

CONNETTORI MASCHIO
A MOLLA

CONNECTEURS MÂLE
RESSORT


STECKERTEIL INVERTIERT
(STIFTKONTAKT)
FEDERKRAFT

Pitch Pas	Passo Rastermaß	mm
Rated Voltage Tensione nominale	Tensione nominale Bemessungsspannung	V
Rated Current Intensité nominale	Corrente nominale Bemessungsstrom	A
Types of cables Type du conducteur	Tipo cavi Leitungstypen	
Nominal cross section Section nominale	Sezione nominale Nennquerschnitt	mm² AWG
Stripping lenght Longueur de dénudage	Lunghezza spelatura Abisolierlänge	mm
Temperature Température	Temperatura Temperatur	°C
Housing Corps isolant	Corpo isolante Isolierkörper	

	IMQ	EN61984
	VDE	EN61984
	cUL	UL1059 + C22.2 n°158

Poles Pôles	Poli Polzahl	X
Colours Couleurs	Colori Farben	Y
Other information Autres données	Altri dati Weitere Informationen	p.

How to order Référence de commande	Ordinazione Bestellschlüssel
MRT40 P5,08 / X	... Y N...
Type Pitch Poles Version Colors Printing	Tipo Passo Poli Versione Colori Numerazione
Type Pas Pôles Version Couleurs Marquage	Type Rastermaß Polzahl Version Farben Bedruckung

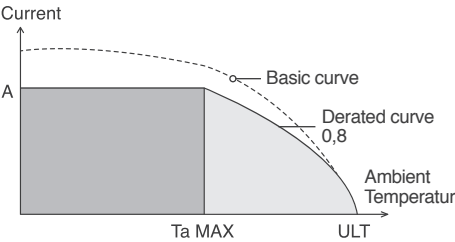

Ta MAX: Max Ambient Temperature to perform nominal values
ULT: Upper Limit Temperature


MRT40..FV

Single block · Blocco unico
Monobloc · Einzelblock

Poles · Poli · Pôles · Polzahl


2/16



5,08		
300		
18		
		
0,2 ÷ 2,5 24 ÷ 14	0,2 ÷ 2,5 24 ÷ 14	0,2 ÷ 2,5 24 ÷ 14
8		
Ta MAX: 75 / ULT: 160		
PA - UL 94 V0		

V	A	mm²/AWG
300	18	0,2 ÷ 2,5
300	18	0,2 ÷ 2,5
300	14	24 ÷ 14

min 2 - max 16
VE / on demand GR GR1 NE AR BL RO GI
D/B5

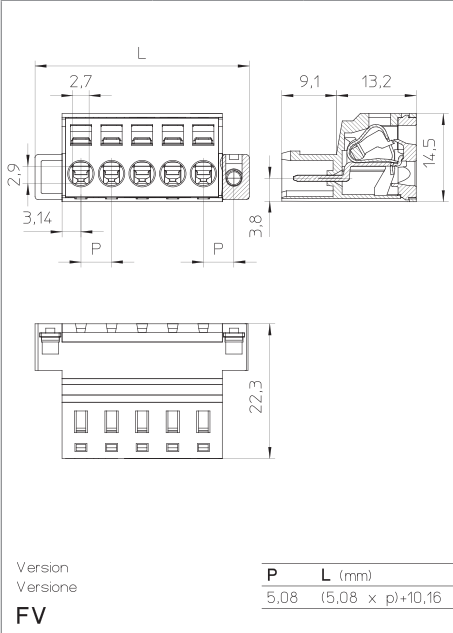


MRT40..FVS

Single block · Blocco unico
Monobloc · Einzelblock

Poles · Poli · Pôles · Polzahl

2/16



5,08		
300		
18		
		
0,2 ÷ 2,5 24 ÷ 14	0,2 ÷ 2,5 24 ÷ 14	0,2 ÷ 2,5 24 ÷ 14
8		
Ta MAX: 75 / ULT: 160		
PA - UL 94 V0		

V	A	mm²/AWG
300	18	0,2 ÷ 2,5
300	18	0,2 ÷ 2,5
300	14	24 ÷ 14

min 2 - max 16
VE / on demand GR GR1 NE AR BL RO GI
D/B5

