

FEMALE PLUG
FOR P.C.B.

CONNETTORI FEMMINA
PER C.S.

CONNECTEURS FEMELLE
POUR C.I.

STECKERTEIL
FÜR LEITERPLATTEN


Pitch Pas	Passo Rastermaß	mm
Rated Voltage Tensione nominale Tension nominale	Tensione nominale Bemessungsspannung	V
Rated Current Intensité nominale	Corrente nominale Bemessungsstrom	A

Temperature Température	Temperatura Temperatur	°C
Housing Corps isolant	Corpo isolante Isolierkörper	

	IMQ	EN61984
	VDE	EN61984
	cUL	UL1059 + C22.2 n°158

Poles Pôles	Poli Polzahl	X
Colours Couleurs	Colori Farben	Y
Other information Autres données	Altri dati Weitere Informationen	p.

How to order Référence de commande	Ordinazione Bestellschlüssel
MRT46 P10,16 / X	FV Y N...
Type Pitch Poles Version Colors Printing	Tipo Passo Poli Versione Colori Numerazione
Type Pas Pôles Version Couleurs Marquage	Type Rastermaß Polzahl Version Farben Bedruckung

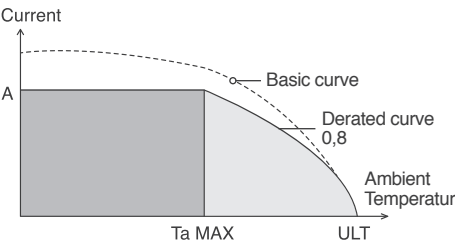

Ta MAX: Max Ambient Temperature to perform nominal values
ULT: Upper Limit Temperature

*SQ Version = Horizontal version

MRT46

Interlocking modules · Modulo componibile
Elements modulaires · Zusammensteckbare Blöcke

Poles · Poli · Pôles · Polzahl

1/2




10,16
600
12

Ta MAX: 45	/	ULT: 160
PA - UL 94 V0		

V	A	mm²/AWG
600	12	0,2 ÷ 2,5
300	12	24 ÷ 14

min 2 - max 8		
VE	/ on demand	GR GR1 NE AR BL RO GI
D/B6		

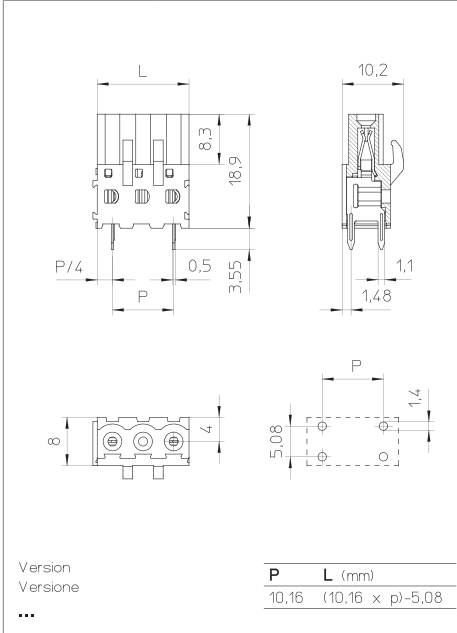

MRT46..SQ*

Interlocking modules · Modulo componibile
Elements modulaires · Zusammensteckbare Blöcke

Poles · Poli · Pôles · Polzahl

1/2




10,16
600
12

Ta MAX: 37	/	ULT: 160
PA - UL 94 V0		

V	A	mm²/AWG
600	12	0,2 ÷ 2,5
300	12	24 ÷ 14

min 2 - max 8		
VE	/ on demand	GR GR1 NE AR BL RO GI
D/B6		

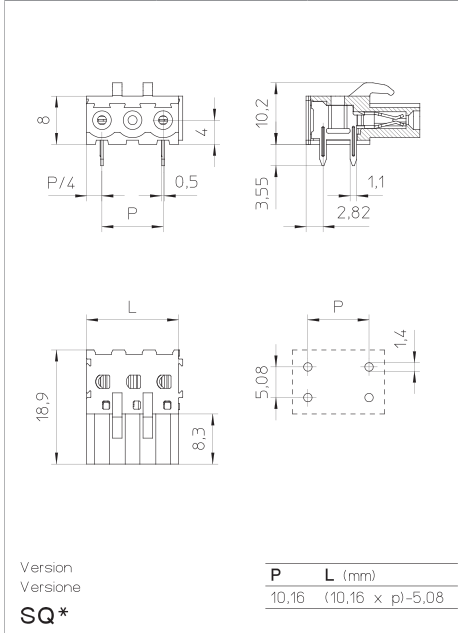

FEMALE PLUG
FOR P.C.B.

CONNETTORI FEMMINA
PER C.S.

CONNECTEURS FEMELLE
POUR C.I.

STECKERTEIL
FÜR LEITERPLATTEN


Pitch Pas	Passo Rastermaß	mm
Rated Voltage Tensione nominale	Tensione nominale Bemessungsspannung	V
Rated Current Intensité nominale	Corrente nominale Bemessungsstrom	A

Temperature Température	Temperatura Temperatur	°C
Housing Corps isolant	Corpo isolante Isolierkörper	

	IMQ	EN61984
	VDE	EN61984
	cUL	UL1059 + C22.2 n°158

Poles Pôles	Poli Polzahl	X
Colours Couleurs	Colori Farben	Y
Other information Autres données	Altri dati Weitere Informationen	p.

How to order Référence de commande	Ordinazione Bestellschlüssel
MRT46 P10,16 / X	FV Y N...
Type Pitch Poles Version Colors Printing	Tipo Passo Poli Versione Colori Numerazione
Type Pas Pôles Version Couleurs Marquage	Type Rastermaß Polzahl Version Farben Bedruckung

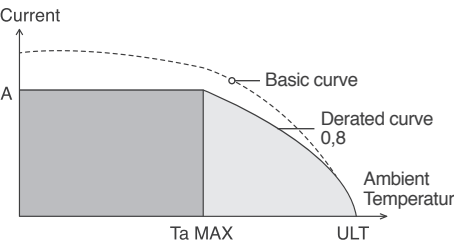

Ta MAX: Max Ambient Temperature to perform nominal values
ULT: Upper Limit Temperature


*SQ Version = Horizontal version

MRT46..FV

Interlocking modules · Modulo componibile
Elements modulaires · Zusammensteckbare Blöcke

Poles · Poli · Pôles · Polzahl

1/2

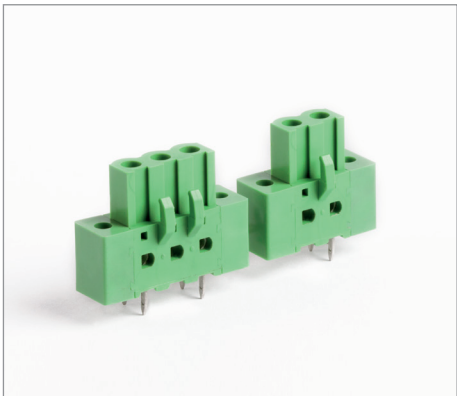


10,16
600
12

Ta MAX: 45	/	ULT: 160
PA - UL 94 V0		

V	A	mm²/AWG
600	12	0,2 ÷ 2,5
300	12	24 ÷ 14

min 2 - max 8		
VE	/ on demand	GR GR1 NE AR BL RO GI
D/B6		

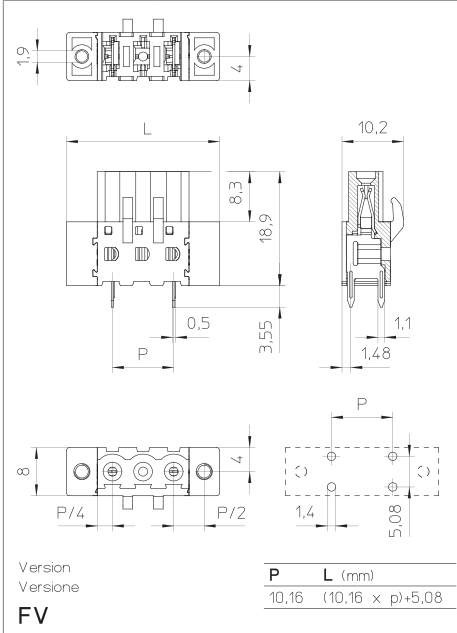

Version
Versione
FV

P	L (mm)
10,16	(10,16 x p)+5,08

MRT46..SQ*FV

Interlocking modules · Modulo componibile
Elements modulaires · Zusammensteckbare Blöcke

Poles · Poli · Pôles · Polzahl

1/2




10,16
600
12

Ta MAX: 45	/	ULT: 160
PA - UL 94 V0		

V	A	mm²/AWG
600	12	0,2 ÷ 2,5
300	12	24 ÷ 14

min 2 - max 8		
VE	/ on demand	GR GR1 NE AR BL RO GI
D/B6		

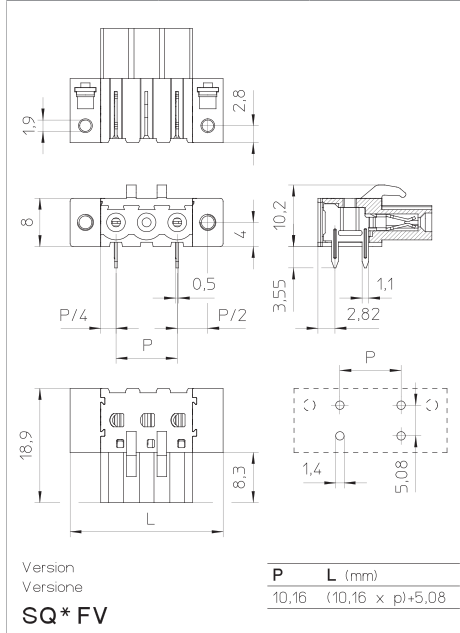

Version
Versione
SQ*FV

P	L (mm)
10,16	(10,16 x p)+5,08

FEMALE PLUG
FOR P.C.B.

CONNETTORI FEMMINA
PER C.S.

CONNECTEURS FEMELLE
POUR C.I.

STECKERTEIL
FÜR LEITERPLATTEN


Pitch Pas	Passo Rastermaß	mm
Rated Voltage Tensione nominale Tension nominale	Tensione nominale Bemessungsspannung	V
Rated Current Intensité nominale	Corrente nominale Bemessungsstrom	A

Temperature Température	Temperatura Temperatur	°C
Housing Corps isolant	Corpo isolante Isolierkörper	

	IMQ	EN61984
	VDE	EN61984
	cUL	UL1059 + C22.2 n°158

Poles Pôles	Poli Polzahl	X
Colours Couleurs	Colori Farben	Y
Other information Autres données	Altri dati Weitere Informationen	p.

How to order Référence de commande	Ordinazione Bestellschlüssel
MRT46 P10,16 / X	FV Y N...
Type Pitch Poles Version Colors Printing	Tipo Passo Poli Versione Colori Numerazione
Type Pas Pôles Version Couleurs Marquage	Type Rastermaß Polzahl Version Farben Bedruckung

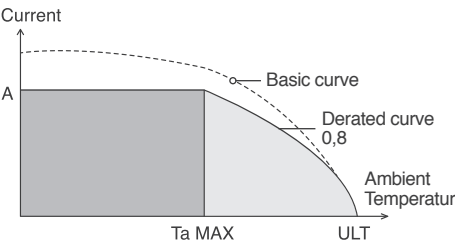

Ta MAX: Max Ambient Temperature to perform nominal values
ULT: Upper Limit Temperature

*SQ Version = Horizontal version

MRT46..SP

Interlocking modules · Modulo componibile
Elements modulaires · Zusammensteckbare Blöcke

Poles · Poli · Pôles · Polzahl

1/2




10,16
600
12

Ta MAX: 45	/	ULT: 160
PA - UL 94 V0		

V	A	mm²/AWG
600	12	0,2 ÷ 2,5
300	12	24 ÷ 14

min 2 - max 8		
VE	/ on demand	GR GR1 NE AR BL RO GI
D/B6		

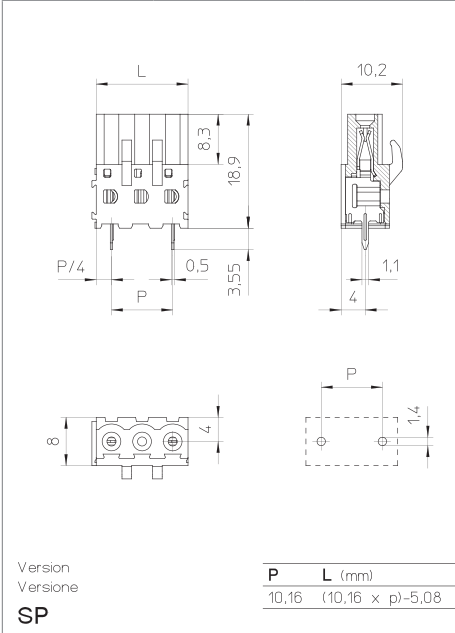

Version
Versione
SP

P	L (mm)
10,16	(10,16 x p)-5,08

MRT46..SPSQ*

Interlocking modules · Modulo componibile
Elements modulaires · Zusammensteckbare Blöcke

Poles · Poli · Pôles · Polzahl

1/2




10,16
600
12

Ta MAX: 45	/	ULT: 160
PA - UL 94 V0		

V	A	mm²/AWG
600	12	0,2 ÷ 2,5
300	12	24 ÷ 14

min 2 - max 8		
VE	/ on demand	GR GR1 NE AR BL RO GI
D/B6		

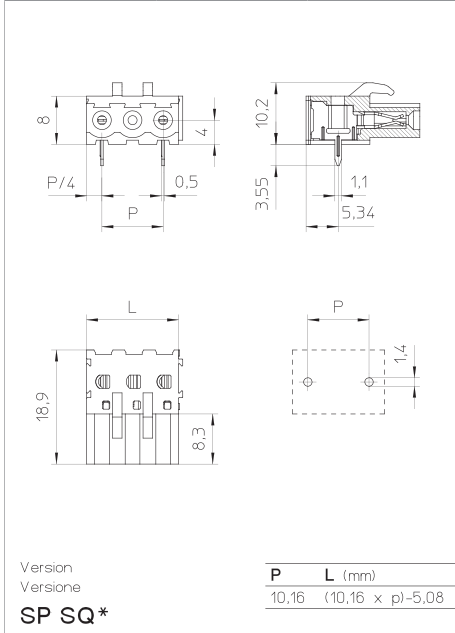

Version
Versione
SP SQ*

P	L (mm)
10,16	(10,16 x p)-5,08

FEMALE PLUG
FOR P.C.B.

CONNETTORI FEMMINA
PER C.S.

CONNECTEURS FEMELLE
POUR C.I.

STECKERTEIL
FÜR LEITERPLATTEN


Pitch Pas	Passo Rastermaß	mm
Rated Voltage Tensione nominale Tension nominale	Tensione nominale Bemessungsspannung	V
Rated Current Intensité nominale	Corrente nominale Bemessungsstrom	A

Temperature Température	Temperatura Temperatur	°C
Housing Corps isolant	Corpo isolante Isolierkörper	

	IMQ	EN61984
	VDE	EN61984
	cUL	UL1059 + C22.2 n°158

Poles Pôles	Poli Polzahl	X
Colours Couleurs	Colori Farben	Y
Other information Autres données	Altri dati Weitere Informationen	p.

How to order Référence de commande	Ordinazione Bestellschlüssel
MRT46 P10,16 / X	FV Y N...
Type Pitch Poles Version Colors Printing	Tipo Passo Poli Versione Colori Numerazione
Type Pas Pôles Version Couleurs Marquage	Type Rastermaß Polzahl Version Farben Bedruckung

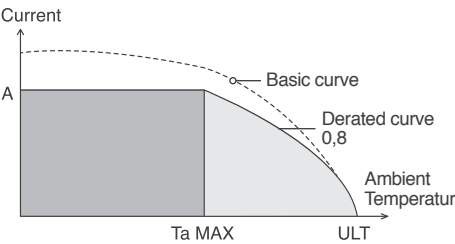

Ta MAX: Max Ambient Temperature to perform nominal values
ULT: Upper Limit Temperature


*SQ Version = Horizontal version

MRT46..SPFV

Interlocking modules · Modulo componibile
Elements modulaires · Zusammensteckbare Blöcke

Poles · Poli · Pôles · Polzahl

1/2

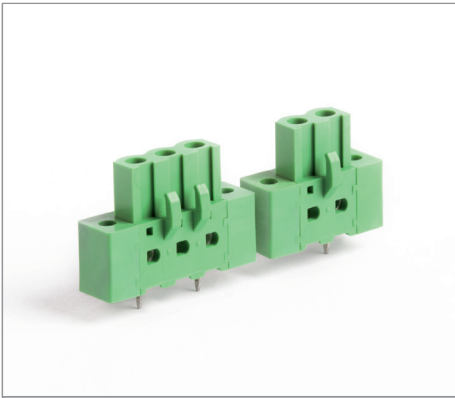


10,16
600
12

Ta MAX: 45	/	ULT: 160
PA - UL 94 V0		

V	A	mm²/AWG
600	12	0,2 ÷ 2,5
300	12	24 ÷ 14

min 2 - max 8		
VE	/ on demand	GR GR1 NE AR BL RO GI
D/B6		

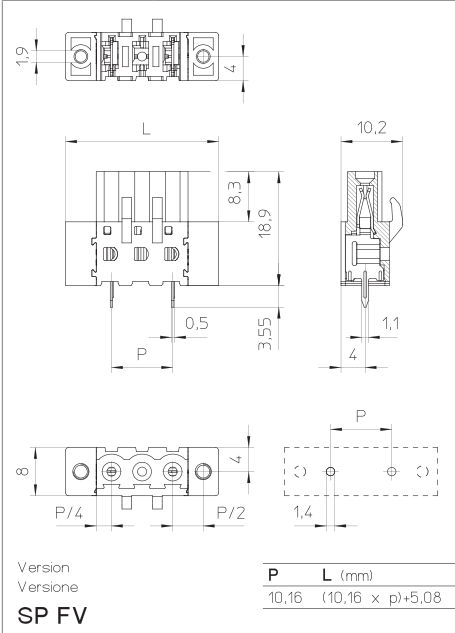

Version
Versione
SP FV

P	L (mm)
10,16	(10,16 x p)+5,08

MRT46..SPSQ*FV

Interlocking modules · Modulo componibile
Elements modulaires · Zusammensteckbare Blöcke

Poles · Poli · Pôles · Polzahl

1/2




10,16
600
12

Ta MAX: 45	/	ULT: 160
PA - UL 94 V0		

V	A	mm²/AWG
600	12	0,2 ÷ 2,5
300	12	24 ÷ 14

min 2 - max 8		
VE	/ on demand	GR GR1 NE AR BL RO GI
D/B6		

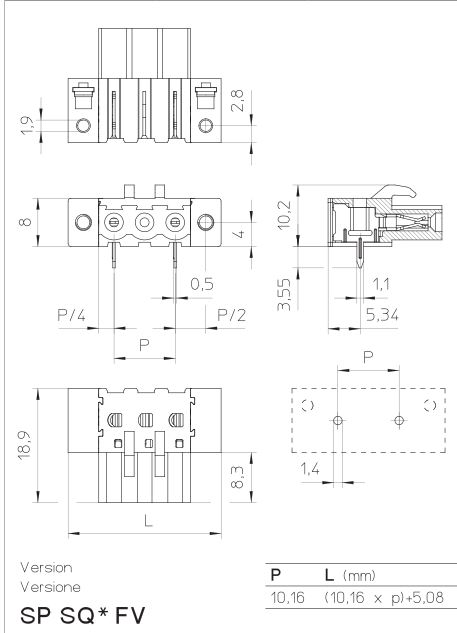

Version
Versione
SP SQ* FV

P	L (mm)
10,16	(10,16 x p)+5,08