

FEMALE PLUG
FOR P.C.B.

CONNETTORI FEMMINA
PER C.S.

CONNECTEURS FEMELLE
POUR C.I.

STECKERTEIL
FÜR LEITERPLATTEN


Pitch Pas	Passo Rastermaß	mm
Rated Voltage Tensione nominale Tension nominale	Tensione nominale Bemessungsspannung	V
Rated Current Intensité nominale	Corrente nominale Bemessungsstrom	A

Temperature Température	Temperatura Temperatur	°C
Housing Corps isolant	Corpo isolante Isolierkörper	

	IMQ	EN61984
	VDE	EN61984
	cUL	UL1059 + C22.2 n°158

Poles Pôles	Poli Polzahl	X
Colours Couleurs	Colori Farben	Y
Other information Autres données	Altri dati Weitere Informationen	p.

How to order Référence de commande	Ordinazione Bestellschlüssel
MRT46 P5,08 / X	... Y N...
Type Pitch Poles Version Colors Printing	Tipo Passo Poli Versione Colori Numerazione
Type Pas Pôles Version Couleurs Marquage	Type Rastermaß Polzahl Version Farben Bedruckung

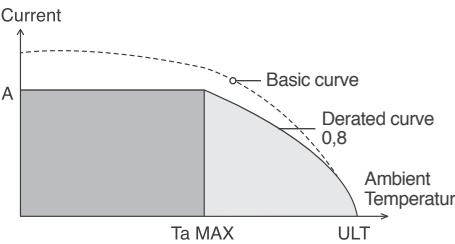

Ta MAX: Max Ambient Temperature to perform nominal values
ULT: Upper Limit Temperature


*SQ Version = Horizontal version

MRT46

Interlocking modules · Modulo componibile
Elements modulaires · Zusammensteckbare Blöcke

Poles · Poli · Pôles · Polzahl

2/3

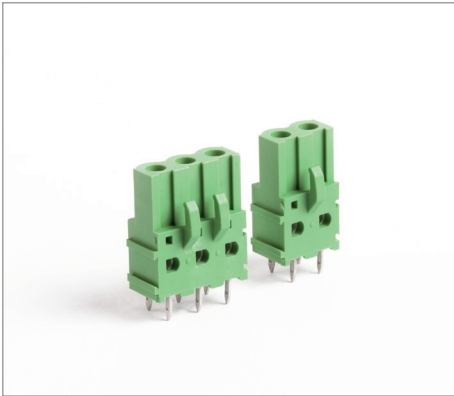


5,08
300
10

Ta MAX: 37	/	ULT: 160
PA - UL 94 V0		

V	A	mm²/AWG
300	10	0,2 ÷ 2,5
300	12	24 ÷ 14

min 2 - max 16		
VE	/ on demand	GR GR1 NE AR BL RO GI
D/B6		

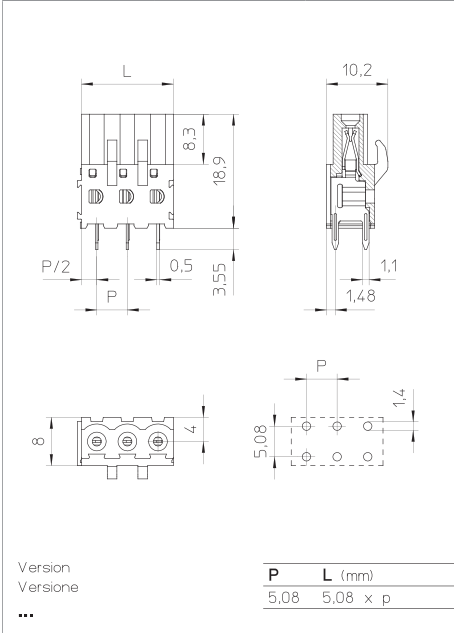

Version
Versione
...


P	L (mm)
5,08	5,08 x p

MRT46..SQ*

Interlocking modules · Modulo componibile
Elements modulaires · Zusammensteckbare Blöcke

Poles · Poli · Pôles · Polzahl

2/3

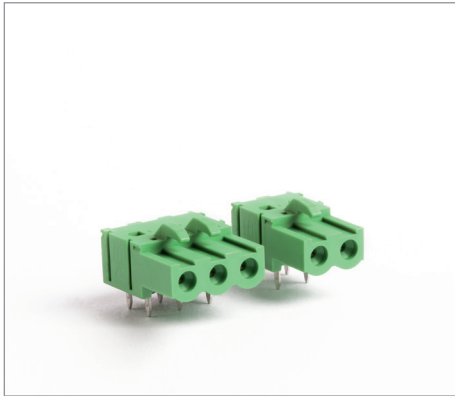


5,08
300
10

Ta MAX: 37	/	ULT: 160
PA - UL 94 V0		

V	A	mm²/AWG
300	10	0,2 ÷ 2,5
300	12	24 ÷ 14

min 2 - max 16		
VE	/ on demand	GR GR1 NE AR BL RO GI
D/B6		

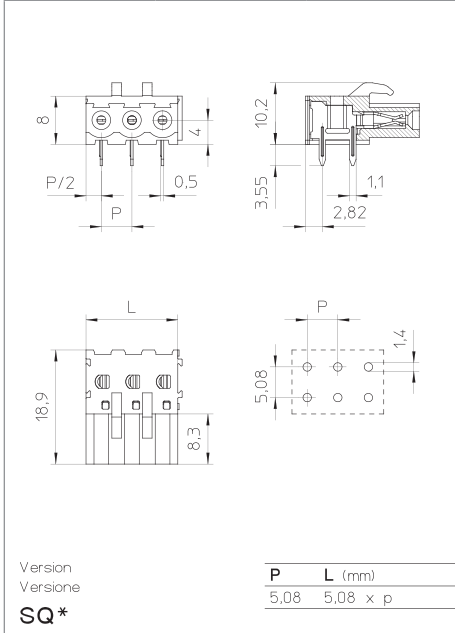

Version
Versione
SQ*

P	L (mm)
5,08	5,08 x p

FEMALE PLUG
FOR P.C.B.

CONNETTORI FEMMINA
PER C.S.

CONNECTEURS FEMELLE
POUR C.I.

STECKERTEIL
FÜR LEITERPLATTEN


Pitch Pas	Passo Rastermaß	mm
Rated Voltage Tensione nominale	Tensione nominale Bemessungsspannung	V
Rated Current Intensité nominale	Corrente nominale Bemessungsstrom	A

Temperature Température	Temperatura Temperatur	°C
Housing Corps isolant	Corpo isolante Isolierkörper	

	IMQ	EN61984
	VDE	EN61984
	cUL	UL1059 + C22.2 n°158

Poles Pôles	Poli Polzahl	X
Colours Couleurs	Colori Farben	Y
Other information Autres données	Altri dati Weitere Informationen	p.

How to order Référence de commande	Ordinazione Bestellschlüssel
MRT46 P5,08 / X	... Y N...
Type Pitch Poles Version Colors Printing	
Tipo Passo Poli Versione Colori Numerazione	
Type Pas Pôles Version Couleurs Marquage	
Typ Rastermaß Polzahl Version Farben Bedruckung	

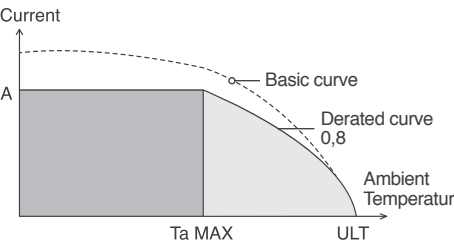


Ta MAX: Max Ambient Temperature to perform nominal values
ULT: Upper Limit Temperature
*SQ Version = Horizontal version

MRT46..FV

Interlocking modules · Modulo componibile
Elements modulaires · Zusammensteckbare Blöcke

Poles · Poli · Pôles · Polzahl

2/3

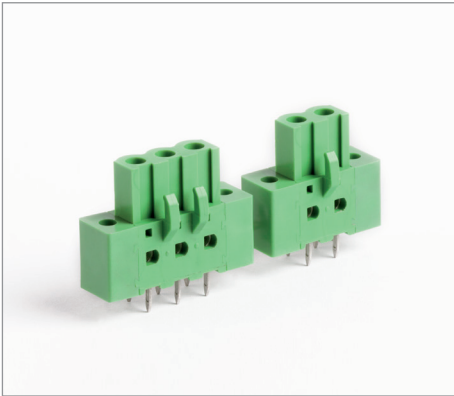


5,08
300
10

Ta MAX: 37	/	ULT: 160
PA - UL 94 V0		

V	A	mm²/AWG
300	10	0,2 ÷ 2,5
300	12	24 ÷ 14

min 2 - max 16		
VE	/ on demand	GR GR1 NE AR BL RO GI
D/B6		

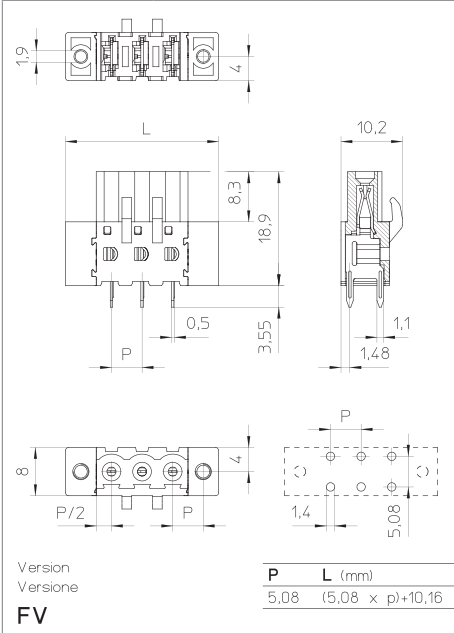


MRT46..SQ*FV

Interlocking modules · Modulo componibile
Elements modulaires · Zusammensteckbare Blöcke

Poles · Poli · Pôles · Polzahl

2/3

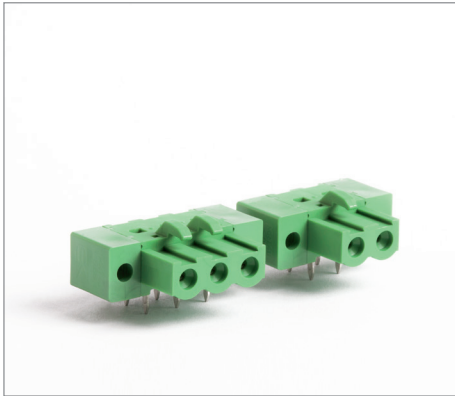


5,08
300
10

Ta MAX: 37	/	ULT: 160
PA - UL 94 V0		

V	A	mm²/AWG
300	10	0,2 ÷ 2,5
300	12	24 ÷ 14

min 2 - max 16		
VE	/ on demand	GR GR1 NE AR BL RO GI
D/B6		

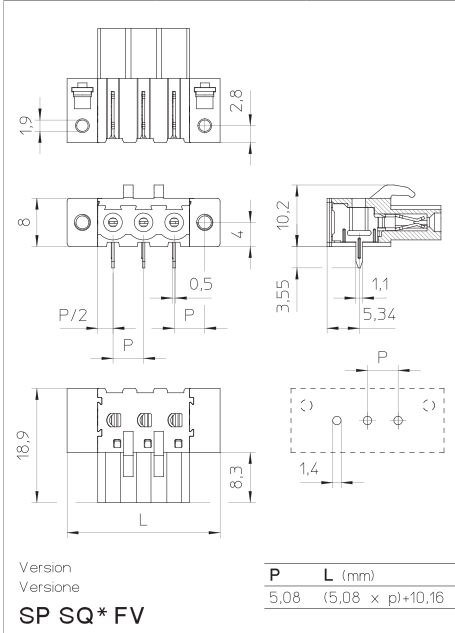

FEMALE PLUG
FOR P.C.B.

CONNETTORI FEMMINA
PER C.S.

CONNECTEURS FEMELLE
POUR C.I.

STECKERTEIL
FÜR LEITERPLATTEN


Pitch Pas	Passo Rastermaß	mm
Rated Voltage Tensione nominale	Tensione nominale Bemessungsspannung	V
Rated Current Intensité nominale	Corrente nominale Bemessungsstrom	A

Temperature Température	Temperatura Temperatur	°C
Housing Corps isolant	Corpo isolante Isolierkörper	

	IMQ	EN61984
	VDE	EN61984
	cUL	UL1059 + C22.2 n°158

Poles Pôles	Poli Polzahl	X
Colours Couleurs	Colori Farben	Y
Other information Autres données	Altri dati Weitere Informationen	p.

How to order Référence de commande	Ordinazione Bestellschlüssel
MRT46 P5,08 / X	... Y N...
Type Pitch Poles Version Colors Printing	Tipo Passo Poli Versione Colori Numerazione
Type Pas Pôles Version Couleurs Marquage	Type Rastermaß Polzahl Version Farben Bedruckung

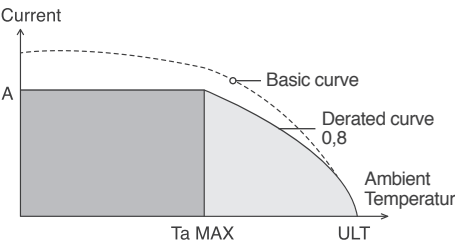

Ta MAX: Max Ambient Temperature to perform nominal values
ULT: Upper Limit Temperature

*SQ Version = Horizontal version

MRT46..SP

Interlocking modules · Modulo componibile
Elements modulaires · Zusammensteckbare Blöcke

Poles · Poli · Pôles · Polzahl

2/3




5,08
300
10

Ta MAX: 37	/	ULT: 160
PA - UL 94 V0		

V	A	mm²/AWG
300	10	0,2 ÷ 2,5
300	12	24 ÷ 14

min 2 - max 16		
VE	/ on demand	GR GR1 NE AR BL RO GI
D/B6		

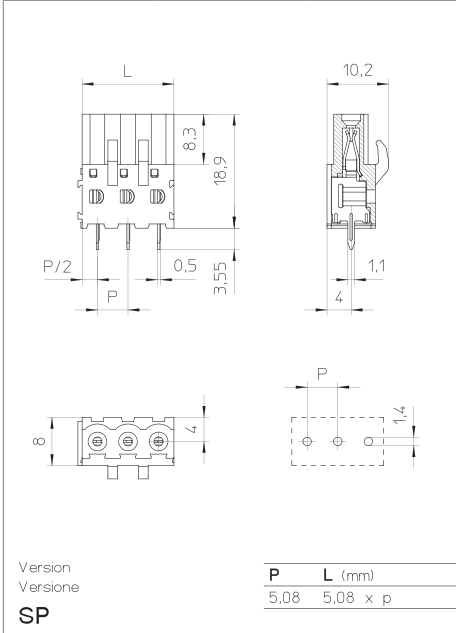

Version
Versione
SP

P	L (mm)
5,08	5,08 x p

MRT46..SPSQ*

Interlocking modules · Modulo componibile
Elements modulaires · Zusammensteckbare Blöcke

Poles · Poli · Pôles · Polzahl

2/3




5,08
300
10

Ta MAX: 37	/	ULT: 160
PA - UL 94 V0		

V	A	mm²/AWG
300	10	0,2 ÷ 2,5
300	12	24 ÷ 14

min 2 - max 16		
VE	/ on demand	GR GR1 NE AR BL RO GI
D/B6		

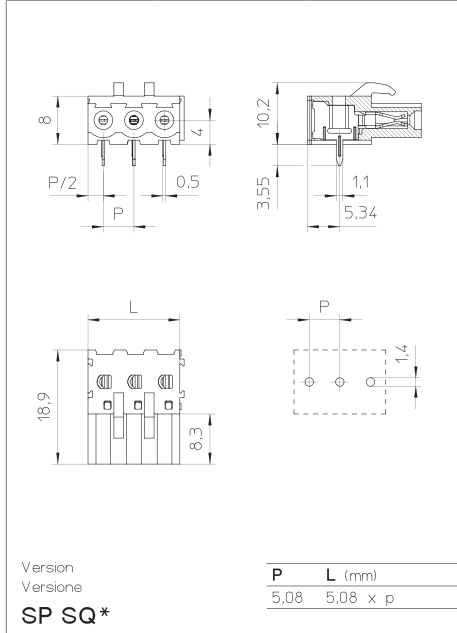


Version
Versione
SP SQ*

P	L (mm)
5,08	5,08 x p

STECKERTEIL FÜR LEITERPLATTEN


How to order	Ordinazione				
Référence de commande	Bestellschlüssel				
MRT46	P5,08	/ X	...	Y	N...
Type	Pitch	Poles	Version	Colors	Printing
Tipo	Passo	Poli	Versione	Colori	Numerazione
Type	Pas	Pôles	Version	Couleurs	Marquage
Typ	Rastermaß	Polzahl	Version	Farben	Bedruckung

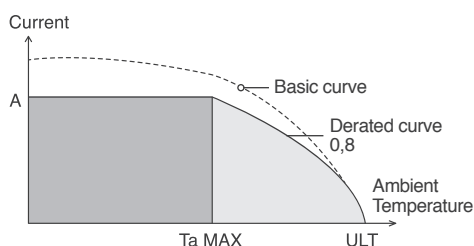

Ta MAX: Max Ambient Temperature to perform nominal values
ULT: Upper Limit Temperature

*SQ Version = Horizontal version


Poles · Poli · Pôles · Polzahl

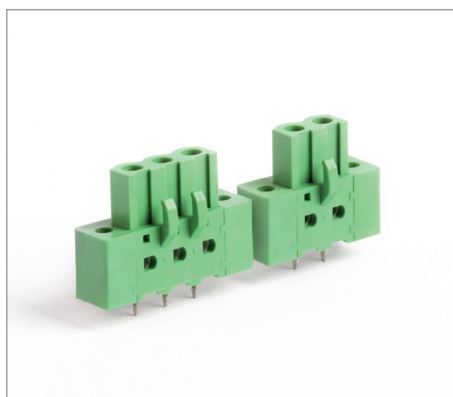

min 2 - max 16

VE / on demand GR GR1 NE AR BL RO GI

D/B6

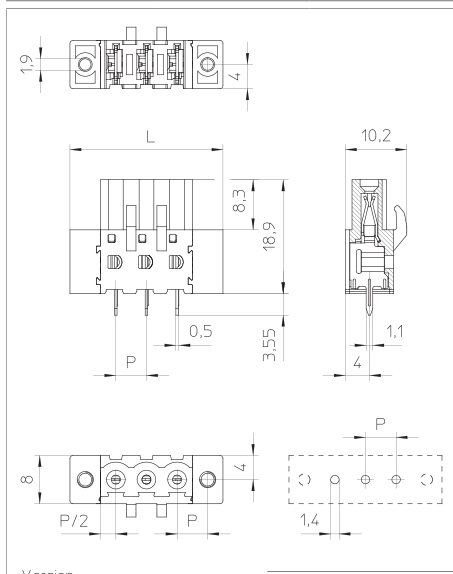

Version
Versione
SP FV


Poles · Poli · Pôles · Polzahl



min 2 - max 16

VE / on demand GR GR1 NE AR BL RO GI

D/B6

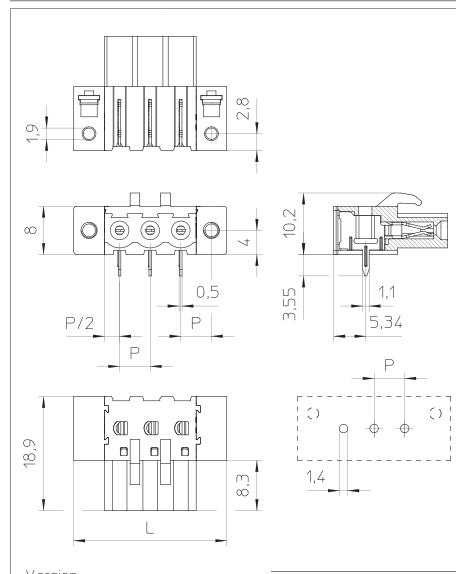

Version
Versione
SP SQ* FV