

FEMALE PLUG
RISING CLAMP

CONNETTORI FEMMINA
CARRELLO

CONNECTEURS FEMELLE
ÉTRIER REMONTANT


STECKERTEIL
LIFTPRINZIP

Pitch Pas	Passo Rastermaß	mm
Rated Voltage Tensione nominale	Tensione nominale Bemessungsspannung	V
Rated Current Intensité nominale	Corrente nominale Bemessungsstrom	A
Types of cables Type du conducteur	Tipo cavi Leitungstypen	
Nominal cross section Section nominale	Sezione nominale Nennquerschnitt	mm² AWG
Stripping lenght Longueur de dénudage	Lunghezza spelatura Abisolierlänge	mm
Torque Couple de serrage	Coppia di torsione Drehmoment	Nm Lb-in
Temperature Température	Temperatura Temperatur	°C
Housing Corps isolant	Corpo isolante Isolierkörper	
Captive Screw Vis Imperdable	Vite Imperdibile Unverlierbare Schraube	
		mm

	IMQ	EN61984
	VDE	EN61984
	cUL	UL1059 + C22.2 n°158

Poles Pôles	Poli Polzahl	X
Colours Couleurs	Colori Farben	Y

How to order Référence de commande		Ordinazione Bestellschlüssel			
MRT8	P3,5	/X	...	Y	N...
Type	Pitch	Poles	Version	Colors	Printing
Tipo	Passo	Poli	Versione	Colori	Numerazione
Type	Pas	Pôles	Version	Couleurs	Marquage
Typ	Rastermaß	Polzahl	Version	Farben	Bedruckung

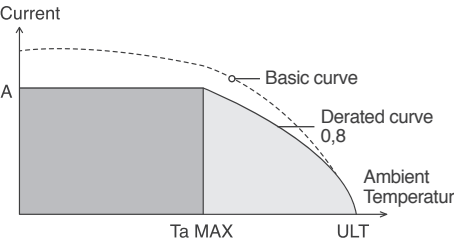

Ta MAX: Max Ambient Temperature to perform nominal values
ULT: Upper Limit Temperature

MRT8

Single block · Blocco unico
Monobloc · Einzelblock

Poles · Poli · Pôles · Polzahl


2/20



3,5 - 3,81		
150		
10		
		
0,2 ÷ 1,0 30 ÷ 16	0,2 ÷ 1,0 30 ÷ 16	0,2 ÷ 1,0 30 ÷ 16
5		
0,3	/	3
Ta MAX: 60 / ULT: 160		
PA - UL 94 V0		
M2		
 0,5 x 3		

V	A	mm²/AWG
150	10	0,2 ÷ 1,0
150	8	0,2 ÷ 1,0
300	8	30 ÷ 16

min 2 - max 20		
VE	/ on demand	GR GR1 NE AR BL RO GI

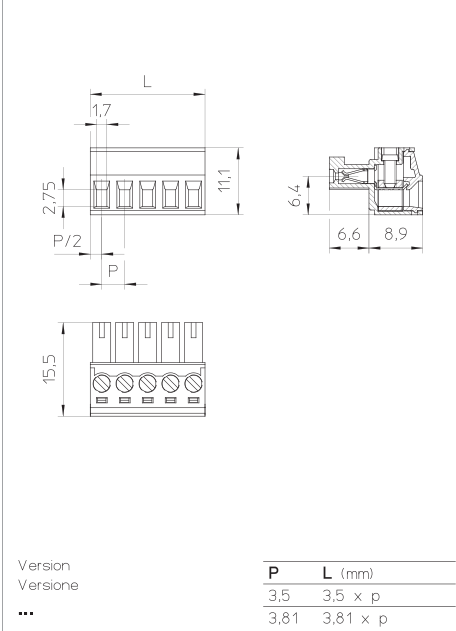

MRT8..FV

Single block · Blocco unico
Monobloc · Einzelblock

Poles · Poli · Pôles · Polzahl

2/16



3,5 - 3,81		
150		
10		
		
0,2 ÷ 1,0 30 ÷ 16	0,2 ÷ 1,0 30 ÷ 16	0,2 ÷ 1,0 30 ÷ 16
5		
0,3	/	3
Ta MAX: 60 / ULT: 160		
PA - UL 94 V0		
M2		
 0,5 x 3		

V	A	mm²/AWG
150	10	0,2 ÷ 1,0
150	8	0,2 ÷ 1,0
300	8	30 ÷ 16

min 2 - max 16		
VE	/ on demand	GR GR1 NE AR BL RO GI

