


STIFTLLEISTE FÜR LEITERPLATTEN

How to order Référence de commande			Ordinazione Bestellschlüssel		
MRT9	P3,5	/X	...	Y	N...
Type	Pitch	Poles	Version	Colors	Printing
Tipo	Passo	Poli	Versione	Colori	Numerazione
Type	Pas	Pôles	Version	Couleurs	Marquage
Tipo	Rastermaß	Polzahl	Version	Farben	Bedruckung

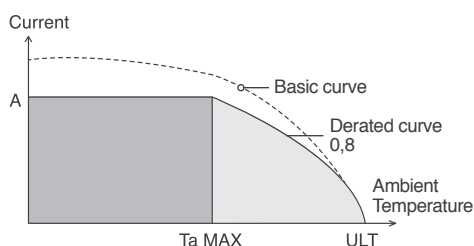

*SQ Version = Horizontal version



Poles · Poli · Pôles · Polzahl



min 2 - max 10

VE / on demand GR GR1 NE AR BL RO GI

D/B4

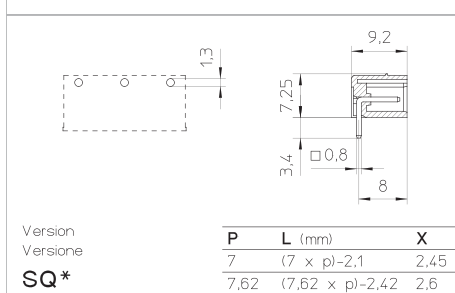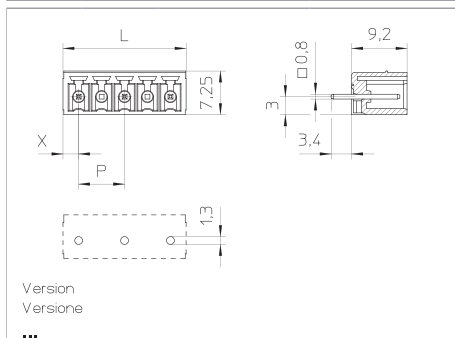



Poles · Poli · Pôles · Polzahl



min 2 - max 10

VE / on demand GR GR1 NE AR BL RO GI

D/B4

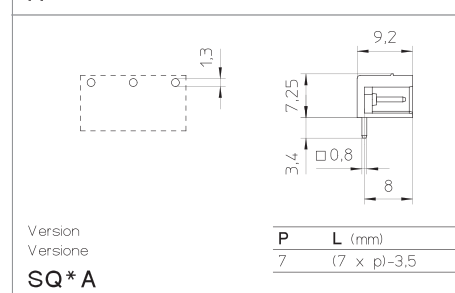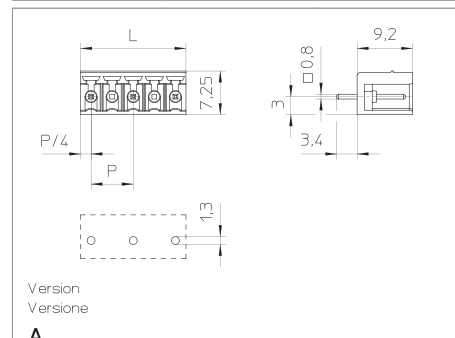

HEADERS
FOR P.C.B.

CONNETTORI MASCHIO
PER C.S.

CONNECTEURS MÂLE
POUR C.I.

STIFTLEISTE
FÜR LEITERPLATTEN


Pitch Pas	Passo Rastermaß	mm
Rated Voltage Tension nominale	Tensione nominale Bemessungsspannung	V
Rated Current Intensité nominale	Corrente nominale Bemessungsstrom	A

Temperature Température	Temperatura Temperatur	°C
Housing Corps isolant	Corpo isolante Isolierkörper	

	IMQ	EN61984
	VDE	EN61984
	cUL	UL1059 + C22.2 n°158

Poles Pôles	Poli Polzahl	X
Colours Couleurs	Colori Farben	Y
Other information Autres données	Altri dati Weitere Informationen	p.

How to order Référence de commande	Ordinazione Bestellschlüssel
MRT9 P3,5 / X ... Y N...	
Type Pitch Poles Version Colors Printing	
Tipo Passo Poli Versione Colori Numerazione	
Type Pas Pôles Version Couleurs Marquage	
Typ Rastermaß Polzahl Version Farben Bedruckung	

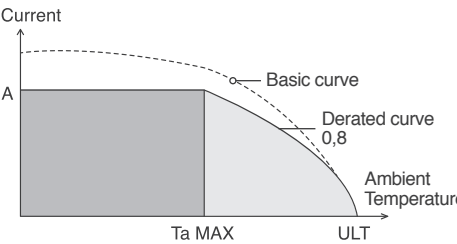

Ta MAX: Max Ambient Temperature to perform nominal values
ULT: Upper Limit Temperature


*SQ Version = Horizontal version

MRT9..FV

MRT9..SQ* FV

Single block · Blocco unico
Monobloc · Einzelblock

Poles · Poli · Pôles · Polzahl 2/10

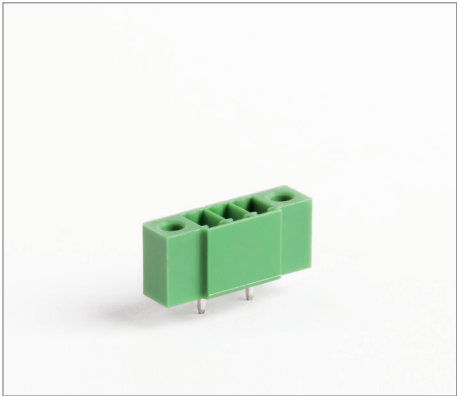


7 - 7,62
400 - 500
12

Ta MAX: 60	/	ULT: 160
PA - UL 94 V0		

V	A	mm²/AWG
400 (7)	500 (7,62)	12
400 (7)	500 (7,62)	12
300	8	30 ÷ 16

min 2 - max 10
VE / on demand GR GR1 NE AR BL RO GI
D/B4

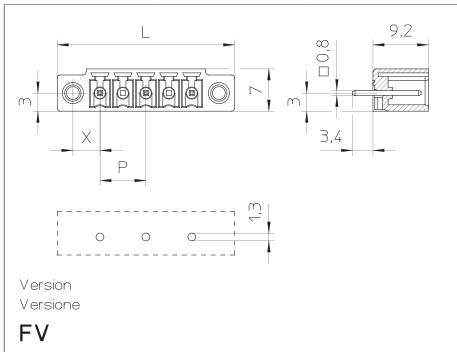

Version Versione	P	L (mm)	X
SQ* FV	7	(7 x p)+6,8	4,3
	7,62	(7,62 x p)+6,58	4,5