

FEMALE PLUG
RISING CLAMP

CONNETTORI FEMMINA
CARRELLO

CONNECTEURS FEMELLE
ÉTRIER REMONTANT

STECKERTEIL
LIFTPRINZIP


Pitch Pas	Passo Rastermaß	mm
Rated Voltage Tensione nominale	Tensione nominale Bemessungsspannung	V
Rated Current Intensité nominale	Corrente nominale Bemessungsstrom	A

Types of cables Type du conducteur	Tipo cavi Leitungstypen	
Nominal cross section Section nominale	Sezione nominale Nennquerschnitt	mm² AWG
Stripping lenght Longueur de dénudage	Lunghezza spelatura Abisolierlänge	mm
Torque Couple de serrage	Coppia di torsione Drehmoment	Nm Lb-in
Temperature Température	Temperatura Temperatur	°C
Housing Corps isolant	Corpo isolante Isolierkörper	
Captive Screw Vis Imperdable	Vite Imperdibile Unverlierbare Schraube	
		mm

	IMQ	EN61984
	VDE	EN61984
	cUL	UL1059 + C22.2 n°158

Poles Pôles	Poli Polzahl	X
Colours Couleurs	Colori Farben	Y

How to order Référence de commande	Ordinazione Bestellschlüssel
PWF1 7,62 / X ... Y N...	
Type Pitch Poles Version Colors Printing	
Tipo Passo Poli Versione Colori Numerazione	
Type Pas Pôles Version Couleurs Marquage	
Typ Rastermaß Polzahl Version Farben Bedruckung	

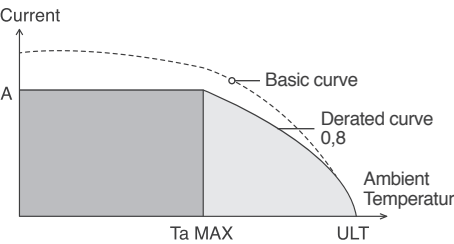

Ta MAX: Max Ambient Temperature to perform nominal values
ULT: Upper Limit Temperature

PWF1

Single block · Blocco unico
Monobloc · Einzelblock

Poles · Poli · Pôles · Polzahl

2/12




7,62
1000
41

0,75 ÷ 10 24 ÷ 8	0,75 ÷ 10 24 ÷ 8	0,75 ÷ 10 24 ÷ 8
7		
0,5	/	4,43
Ta MAX: 50	/	ULT: 100
PA G - UL 94 V0		
M3		
 0,6 x 2,5		

V	A	mm²/AWG
600	41	24 ÷ 8

min 2 - max 12		
VE / on demand GR GR1 NE AR BL RO GI		

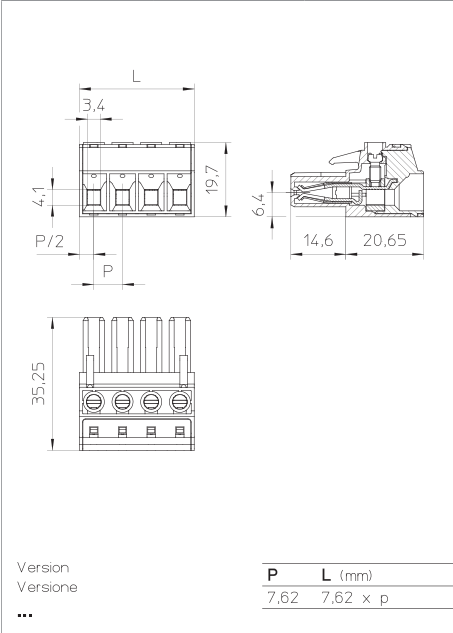

PWF1..FV

Single block · Blocco unico
Monobloc · Einzelblock

Poles · Poli · Pôles · Polzahl

2/12



7,62
1000
41

0,75 ÷ 10 24 ÷ 8	0,75 ÷ 10 24 ÷ 8	0,75 ÷ 10 24 ÷ 8
7		
0,5	/	4,43
Ta MAX: 50	/	ULT: 100
PA G - UL 94 V0		
M3		
 0,6 x 2,5		

V	A	mm²/AWG
600	41	24 ÷ 8

min 2 - max 12		
VE / on demand GR GR1 NE AR BL RO GI		

