

HEADERS
FOR P.C.B.

CONNETTORI MASCHIO
PER C.S.

CONNECTEURS MÂLE
POUR C.I.

STIFTLEISTE
FÜR LEITERPLATTEN


Pitch Pas	Passo Rastermaß	mm
Rated Voltage Tensione nominale	Tensione nominale Bemessungsspannung	V
Rated Current Intensité nominale	Corrente nominale Bemessungsstrom	A

Temperature Température	Temperatura Temperatur	°C
Housing Corps isolant	Corpo isolante Isolierkörper	
Package Enballage	Imballo Verpackung	

	IMQ	EN61984
	VDE	EN61984
	cUL	UL1059 + C22.2 n°158

Poles Pôles	Poli Polzahl	X
Colours Couleurs	Colori Farben	Y
Other information Autres données	Altri dati Weitere Informationen	p.

How to order Référence de commande		Ordinazione Bestellschlüssel			
PWM1	P7,62	/ X	...	Y	N...
Type	Pitch	Poles	Version	Colors	Printing
Tipo	Passo	Poli	Versione	Colori	Numerazione
Type	Pas	Pôles	Version	Couleurs	Marquage
Typ	Rastermaß	Polzahl	Version	Farben	Bedruckung

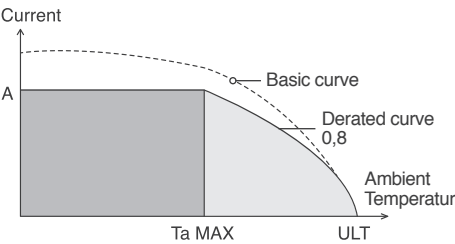

Ta MAX: Max Ambient Temperature to perform nominal values
ULT: Upper Limit Temperature


*SQ Version = Horizontal version

PWM1

Single block · Blocco unico
Monobloc · Einzelblock

Poles · Poli · Pôles · Polzahl

2/12

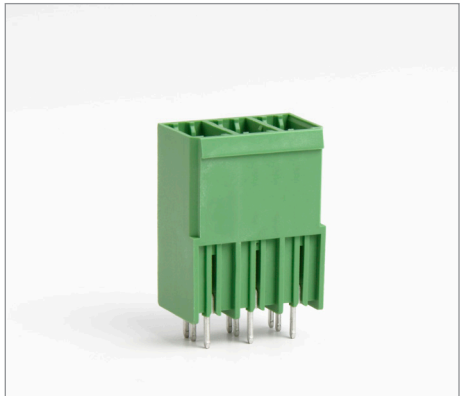


7,62
600
41

Ta MAX: 50	/	ULT: 100
PA G - UL 94 V0		

V	A	mm²/AWG
300	41	24 ÷ 8

min 2 - max 12		
VE	/ on demand	GR GR1 NE AR BL RO GI
D/B4		

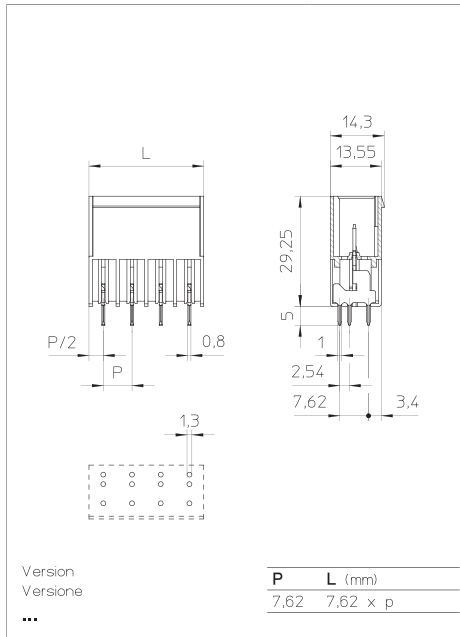

Version
Versione
...


P	L (mm)
7,62	(7,62 x p)

PWM1..FV

Single block · Blocco unico
Monobloc · Einzelblock

Poles · Poli · Pôles · Polzahl

2/12

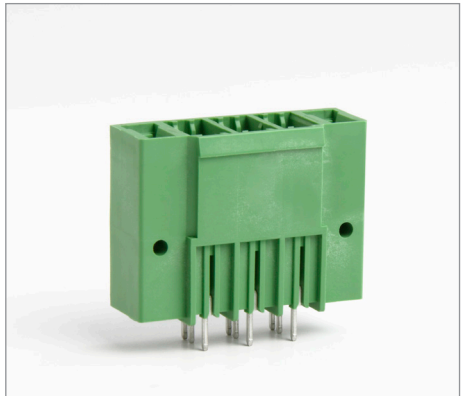


7,62
600
41

Ta MAX: 50	/	ULT: 100
PA G - UL 94 V0		

V	A	mm²/AWG
300	41	24 ÷ 8

min 2 - max 12		
VE	/ on demand	GR GR1 NE AR BL RO GI
D/B4		

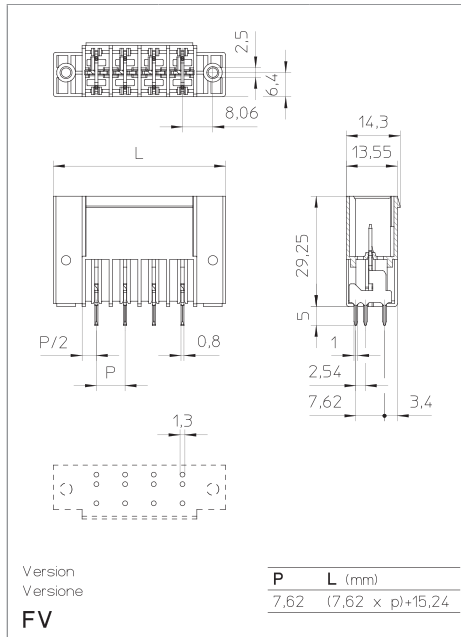

Version
Versione
FV

P	L (mm)
7,62	(7,62 x p)+15,24

HEADERS
FOR P.C.B.

CONNETTORI MASCHIO
PER C.S.

CONNECTEURS MÂLE
POUR C.I.

STIFTLEISTE
FÜR LEITERPLATTEN


Pitch Pas	Passo Rastermaß	mm
Rated Voltage Tensione nominale	Tensione nominale Bemessungsspannung	V
Rated Current Intensité nominale	Corrente nominale Bemessungsstrom	A

Temperature Température	Temperatura Temperatur	°C
Housing Corps isolant	Corpo isolante Isolierkörper	
Package Emballage	Imballo Verpackung	

	IMQ	EN61984
	VDE	EN61984
	cUL	UL1059 + C22.2 n°158

Poles Pôles	Poli Polzahl	X
Colours Couleurs	Colori Farben	Y
Other information Autres données	Altri dati Weitere Informationen	p.

How to order Référence de commande	Ordinazione Bestellschlüssel
PWM1 P7,62 / X	... Y N...
Type Pitch Poles Version Colors Printing	Tipo Passo Poli Versione Colori Numerazione
Type Pas Pôles Version Couleurs Marquage	Typ Rastermaß Polzahl Version Farben Bedruckung

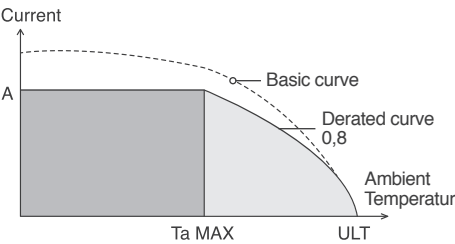


Ta MAX: Max Ambient Temperature to perform nominal value
ULT: Upper Limit Temperature
*SQ Version = Horizontal version

PWM1..SQ

Single block · Blocco unico
Monobloc · Einzelblock

Poles · Poli · Pôles · Polzahl

2/12

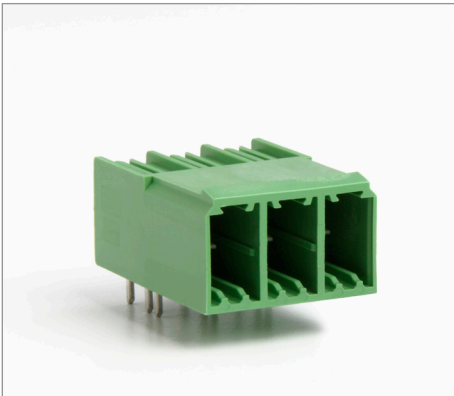


7,62
600
41

Ta MAX: 50	/	ULT: 100
PA G - UL 94 V0		

V	A	mm²/AWG
300	41	24 ÷ 8

min 2 - max 12
VE / on demand GR GR1 NE AR BL RO GI
D/B4

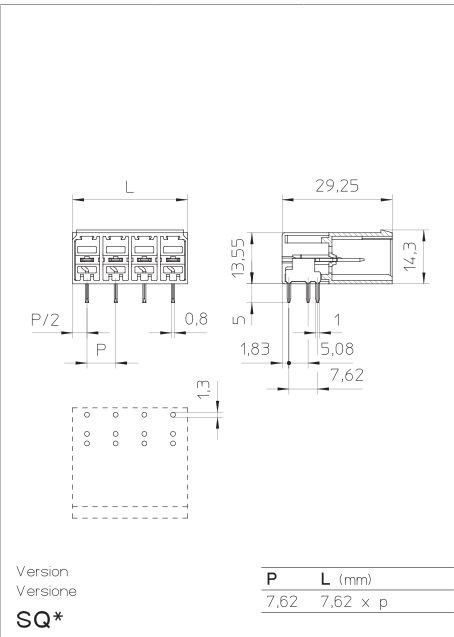


PWM1..SQ FV

Single block · Blocco unico
Monobloc · Einzelblock

Poles · Poli · Pôles · Polzahl

2/12

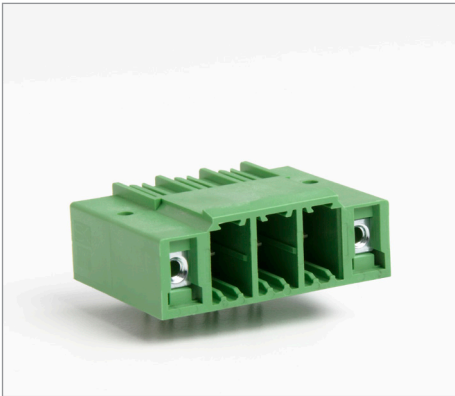


7,62
600
41

Ta MAX: 50	/	ULT: 100
PA G - UL 94 V0		


V	A	mm²/AWG
300	41	24 ÷ 8

min 2 - max 12
VE / on demand GR GR1 NE AR BL RO GI
D/B4

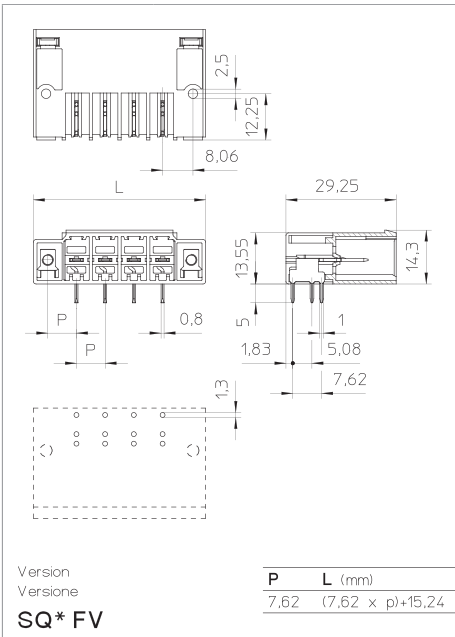

STIFTLLEISTE FÜR LEITERPLATTEN

How to order Référence de commande			Ordinazione Bestellschlüssel		
PWM1	P7,62	/ X	...	Y	N...
Type	Pitch	Poles	Version	Colors	Printing
Tipo	Passo	Poli	Versione	Colori	Numerazione
Type	Pas	Pôles	Version	Couleurs	Marquage
Typ	Bastermaß	Polzahl	Version	Farben	Bedruckung

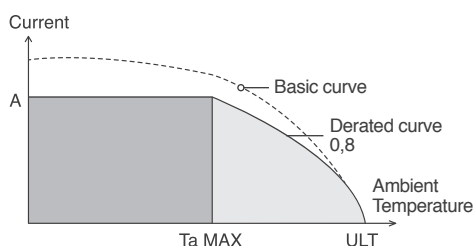

*SQ Version = Horizontal version


2/12




min 2 - max 12

VE / on demand GR GR1 NE AR BL RO GI

D/B4

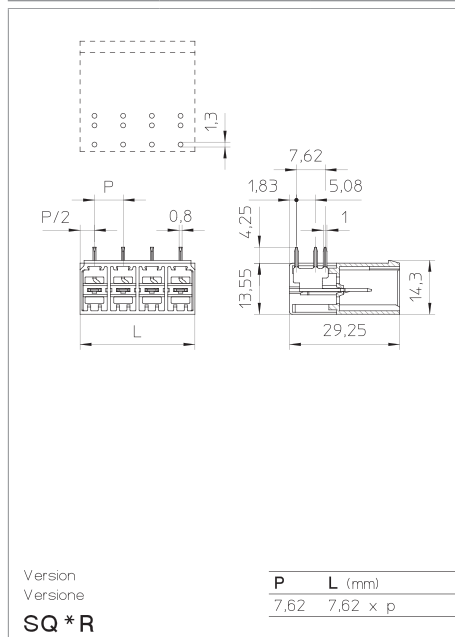


2/12

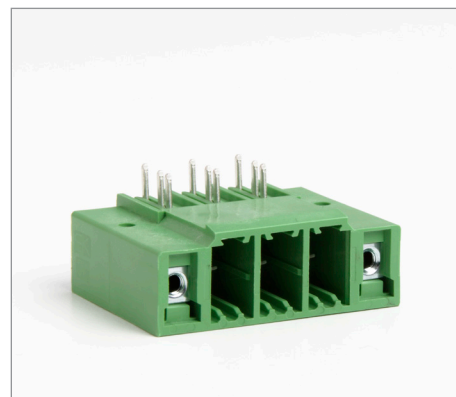

min 2 - max 12

VE / on demand GR GR1 NE AR BL RO GI

D/B4

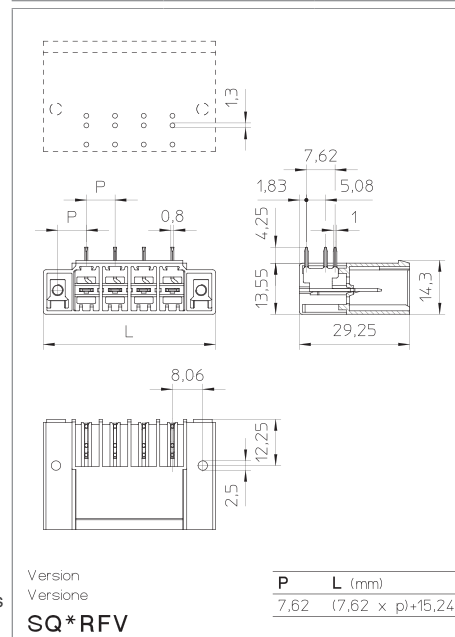

HEADERS
FOR P.C.B.

CONNETTORI MASCHIO
PER C.S.

CONNECTEURS MÂLE
POUR C.I.

STIFTLEISTE
FÜR LEITERPLATTEN


Pitch Pas	Passo Rastermaß	mm
Rated Voltage Tensione nominale	Tensione nominale Bemessungsspannung	V
Rated Current Intensité nominale	Corrente nominale Bemessungsstrom	A

Temperature Température	Temperatura Temperatur	°C
Housing Corps isolant	Corpo isolante Isolierkörper	
Package Enballage	Imballo Verpackung	

	IMQ	EN61984
	VDE	EN61984
	cUL	UL1059 + C22.2 n°158

Poles Pôles	Poli Polzahl	X
Colours Couleurs	Colori Farben	Y
Other information Autres données	Altri dati Weitere Informationen	p.

How to order Référence de commande		Ordinazione Bestellschlüssel			
PWM1	P7,62	/ X	...	Y	N...
Type	Pitch	Poles	Version	Colors	Printing
Tipo	Passo	Poli	Versione	Colori	Numerazione
Type	Pas	Pôles	Version	Couleurs	Marquage
Typ	Rastermaß	Polzahl	Version	Farben	Bedruckung

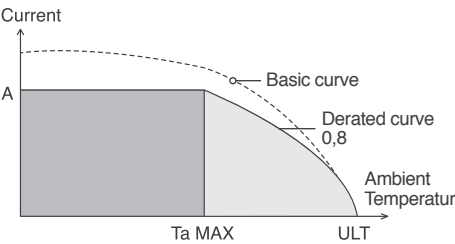


Ta MAX: Max Ambient Temperature to perform nominal value
ULT: Upper Limit Temperature
*SQ Version = Horizontal version

PWM1..DP

Single block · Blocco unico
Monobloc · Einzelblock

Poles · Poli · Pôles · Polzahl 2/12

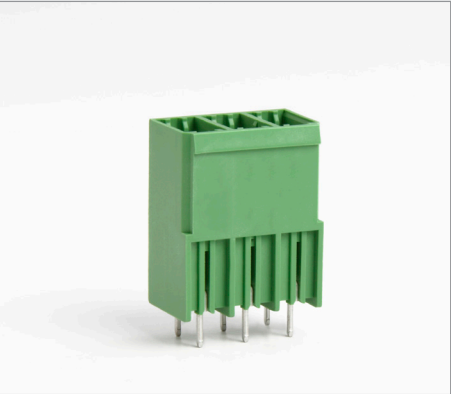


7,62
600
41

Ta MAX: 50	/	ULT: 100
PA G - UL 94 V0		

V	A	mm²/AWG
300	41	24 ÷ 8


min 2 - max 12		
VE	/ on demand	GR GR1 NE AR BL RO GI
D/B4		

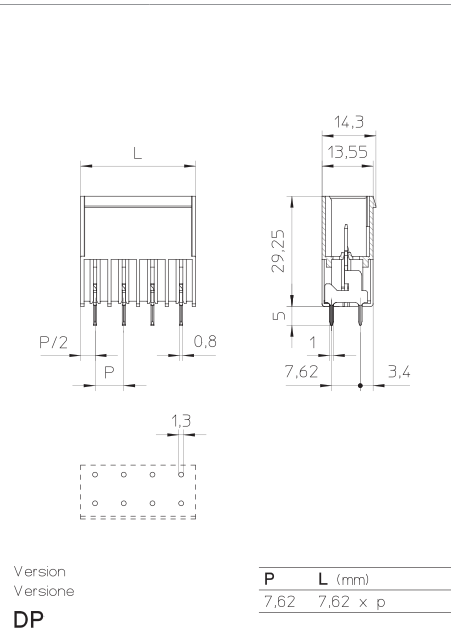

PWM1..DP FV

Single block · Blocco unico
Monobloc · Einzelblock

Poles · Poli · Pôles · Polzahl 2/12

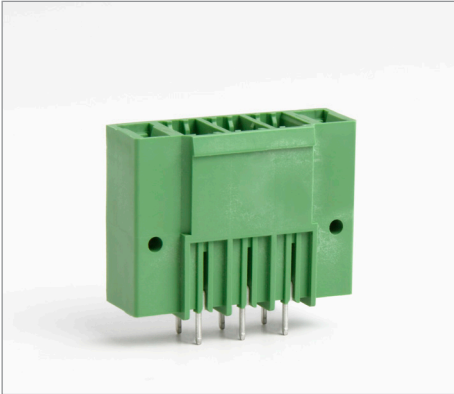


7,62
600
41

Ta MAX: 50	/	ULT: 100
PA G - UL 94 V0		

V	A	mm²/AWG
300	41	24 ÷ 8

min 2 - max 12		
VE	/ on demand	GR GR1 NE AR BL RO GI
D/B4		

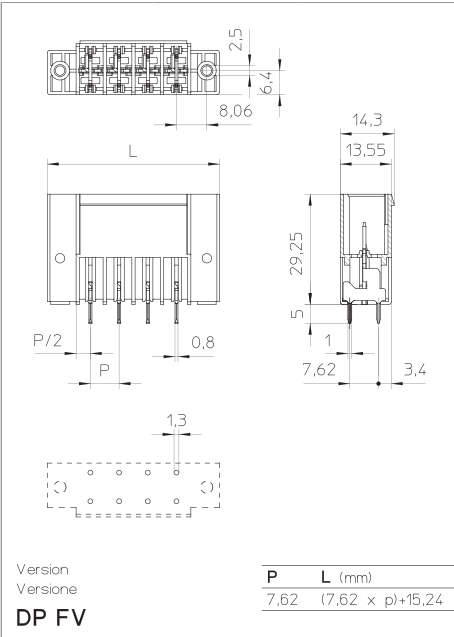

HEADERS
FOR P.C.B.

CONNETTORI MASCHIO
PER C.S.

CONNECTEURS MÂLE
POUR C.I.

STIFTLISTE
FÜR LEITERPLATTEN


Pitch Pas	Passo Rastermaß	mm
Rated Voltage Tensione nominale	Tensione nominale Bemessungsspannung	V
Rated Current Intensité nominale	Corrente nominale Bemessungsstrom	A

Temperature Température	Temperatura Temperatur	°C
Housing Corps isolant	Corpo isolante Isolierkörper	
Package Enballage	Imballo Verpackung	

	IMQ	EN61984
	VDE	EN61984
	cUL	UL1059 + C22.2 n°158

Poles Pôles	Poli Polzahl	X
Colours Couleurs	Colori Farben	Y
Other information Autres données	Altri dati Weitere Informationen	p.

How to order Référence de commande		Ordinazione Bestellschlüssel			
PWM1	P7,62	/ X	...	Y	N...
Type	Pitch	Poles	Version	Colors	Printing
Tipo	Passo	Poli	Versione	Colori	Numerazione
Type	Pas	Pôles	Version	Couleurs	Marquage
Typ	Rastermaß	Polzahl	Version	Farben	Bedruckung

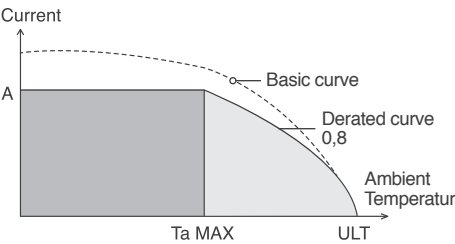

Ta MAX: Max Ambient Temperature to perform nominal value
ULT: Upper Limit Temperature


*SQ Version = Horizontal version

PWM1..DP SQ

Single block · Blocco unico
Monobloc · Einzelblock

Poles · Poli · Pôles · Polzahl

2/12

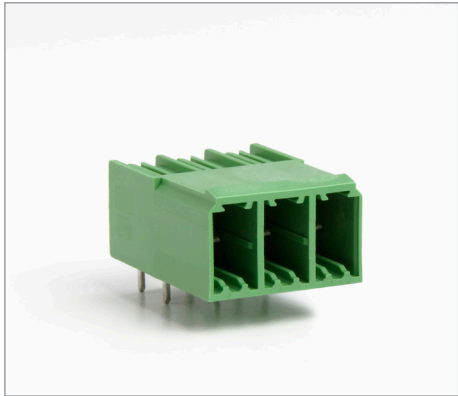


7,62
600
41

Ta MAX: 50	/	ULT: 100
PA G - UL 94 V0		

V	A	mm²/AWG
300	41	24 ÷ 8

min 2 - max 12		
VE / on demand	GR GR1 NE AR BL RO GI	
D/B4		

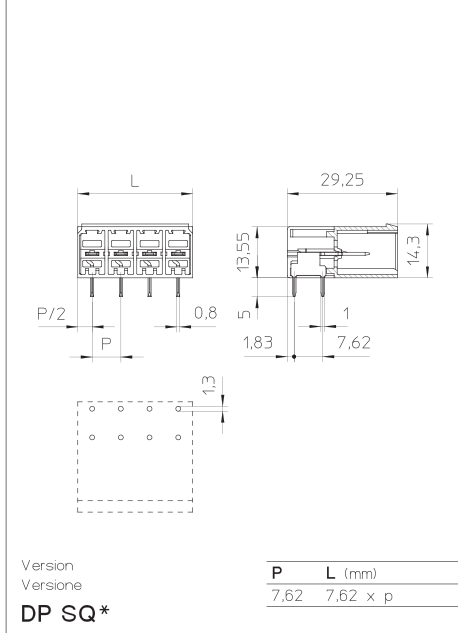


PWM1..DP SQ FV

Single block · Blocco unico
Monobloc · Einzelblock

Poles · Poli · Pôles · Polzahl

2/12

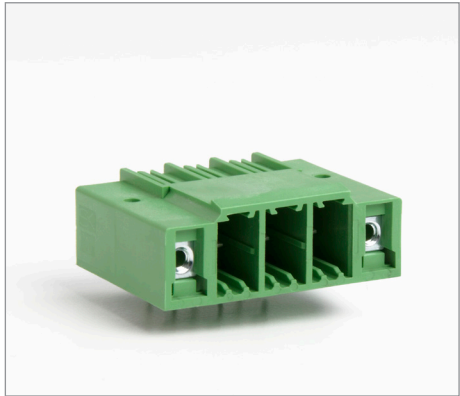


7,62
600
41

Ta MAX: 50	/	ULT: 100
PA G - UL 94 V0		

V	A	mm²/AWG
300	41	24 ÷ 8

min 2 - max 12		
VE / on demand	GR GR1 NE AR BL RO GI	
D/B4		

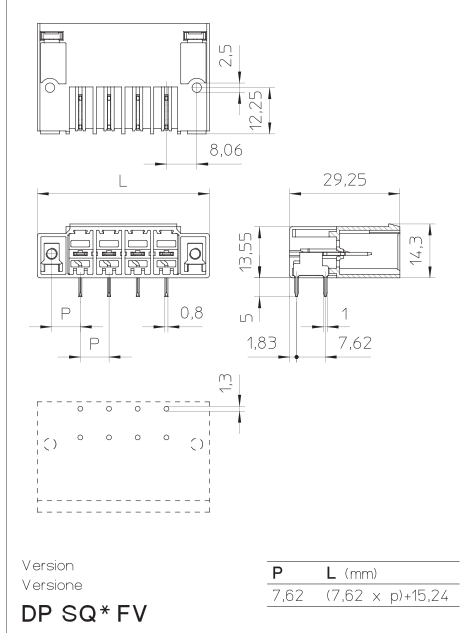

STIFTLLEISTE FÜR LEITERPLATTEN

How to order Référence de commande			Ordinazione Bestellschlüssel		
PWM1	P7,62	/ X	DP SQ R Y	N...	
Type	Pitch	Poles	Version	Colors	Printing
Tipo	Passo	Poli	Versione	Colori	Numerazione
Type	Pas	Pôles	Version	Couleurs	Marquage
Typ	Rastermaß	Polzahl	Version	Farben	Bedruckung



2/12



2/12

