

TERMINAL BLOCKS FOR P.C.B.
 RISING CLAMP

MORSETTI PER C.S.
 CARRELLO

BLOCS DE JONCTION C.I.
 ÉTRIER REMONTANT

PRINTKLEMMEN
 LIFTPRINZIP


Pitch Pas	Passo Rastermaß	mm
Rated Voltage Tensione nominale	Tensione nominale Bemessungsspannung	V
Rated Current Intensité nominale	Corrente nominale Bemessungsstrom	A

Types of cables Type du conducteur	Tipo cavi Leitungstypen	
Nominal cross section Section nominale	Sezione nominale Nennquerschnitt	mm² AWG
Stripping lenght Longueur de dénudage	Lunghezza spelatura Abisolierlänge	mm
Torque Couple de serrage	Coppia di torsione Drehmoment	Nm Lb-in
Temperature Température	Temperatura Temperatur	°C
Housing Corps isolant	Corpo isolante Isolierkörper	
Captive Screw Vis Imperdable	Vite Imperdibile Unverlierbare Schraube	
		mm

	IMQ	EN60947-7-4
	VDE	EN60947-7-4
	cUL	UL1059 + C22.2 n°158

Poles Pôles	Poli Polzahl	X
Colours Couleurs	Colori Farben	Y

How to order Référence de commande	Ordinazione Bestellschlüssel
PWT1 P10,16 /X ... Y N...	
Type Pitch Poles Version Colors Printing	
Tipo Passo Poli Versione Colori Numerazione	
Type Pas Pôles Version Couleurs Marquage	
Typ Rastermaß Polzahl Version Farben Bedruckung	

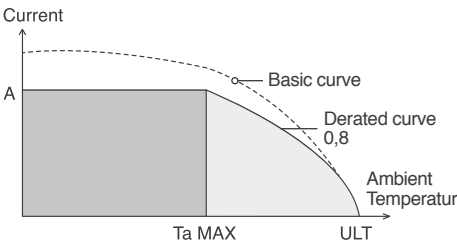

Ta MAX: Max Ambient Temperature to perform nominal values
 ULT: Upper Limit Temperature

PWT1

Interlocking modules · Modulo componibile
 Elements modulaires · Zusammensteckbare Blöcke

Poles · Poli · Pôles · Polzahl

1




10,16
800
76

0,5 ÷ 16 20 ÷ 6	0,5 ÷ 16 20 ÷ 6	0,5 ÷ 16 20 ÷ 6
10		
1,2	/	13,3
Ta MAX: 40	/	ULT: 120
PA G - UL 94 V0		
M4		
 0,8 x 4,0		

V	A	mm²/AWG
300	60	20 ÷ 6

min 1 - max 24		
VE / on demand GR GR1 NE AR BL RO GI		

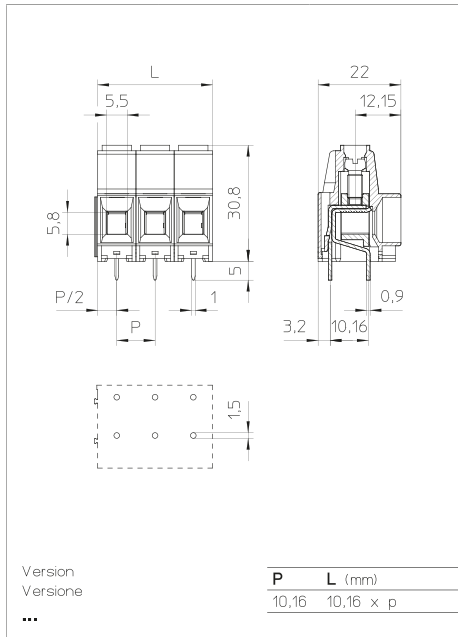

PWT1..BF

Interlocking modules · Modulo componibile
 Elements modulaires · Zusammensteckbare Blöcke

Poles · Poli · Pôles · Polzahl

1




10,16
800
76

0,5 ÷ 16 20 ÷ 6	0,5 ÷ 16 20 ÷ 6	0,5 ÷ 16 20 ÷ 6
10		
1,2	/	13,3
Ta MAX: 40	/	ULT: 120
PA G - UL 94 V0		
M4		
 0,8 x 4,0		

V	A	mm²/AWG
600	60	20 ÷ 6

min 1 - max 24		
VE / on demand GR GR1 NE AR BL RO GI		

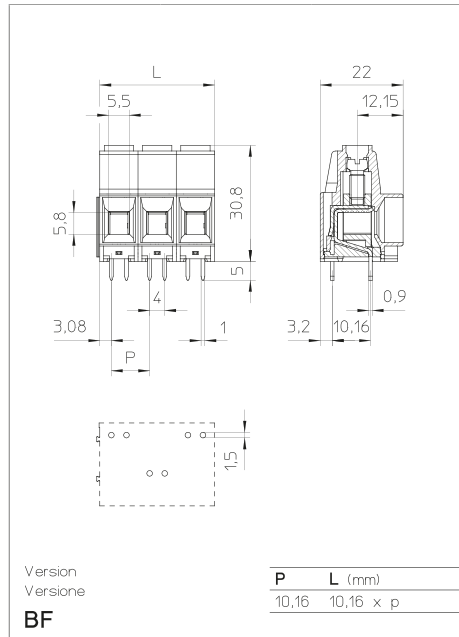

TERMINAL BLOCKS FOR P.C.B.
RISING CLAMP

MORSETTI PER C.S.
CARRELLO

BLOCS DE JONCTION C.I.
ÉTRIER REMONTANT

PRINTKLEMMEN
LIFTPRINZIP


Pitch Pas	Passo Rastermaß	mm
Rated Voltage Tensione nominale	Tensione nominale Bemessungsspannung	V
Rated Current Intensité nominale	Corrente nominale Bemessungsstrom	A

Types of cables Type du conducteur	Tipo cavi Leitungstypen	
Nominal cross section Section nominale	Sezione nominale Nennquerschnitt	mm² AWG
Stripping lenght Longueur de dénudage	Lunghezza spelatura Abisolierlänge	mm
Torque Couple de serrage	Coppia di torsione Drehmoment	Nm Lb-in
Temperature Température	Temperatura Temperatur	°C
Housing Corps isolant	Corpo isolante Isolierkörper	
Captive Screw Vis Imperdable	Vite Imperdibile Unverlierbare Schraube	
		mm

	IMQ	EN60947-7-4
	VDE	EN60947-7-4
	cUL	UL1059 + C22.2 n°158

Poles Pôles	Poli Polzahl	X
Colours Couleurs	Colori Farben	Y

How to order Référence de commande	Ordinazione Bestellschlüssel
PWT1 P10,16 /X ... Y N...	
Type Pitch Poles Version Colors Printing	
Tipo Passo Poli Versione Colori Numerazione	
Type Pas Pôles Version Couleurs Marquage	
Typ Rastermaß Polzahl Version Farben Bedruckung	

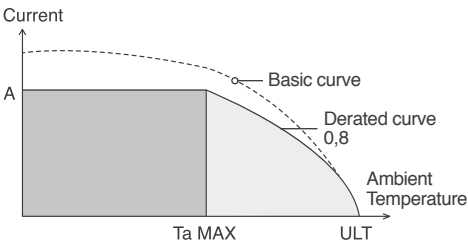

Ta MAX: Max Ambient Temperature to perform nominal value
ULT: Upper Limit Temperature

PWT1..B

Interlocking modules · Modulo componibile
Elements modulaires · Zusammensteckbare Blöcke

Poles · Poli · Pôles · Polzahl

1




10,16	
Combination	BF: 800 BB: 300
76	

0,5 ÷ 16 20 ÷ 6	0,5 ÷ 16 20 ÷ 6	0,5 ÷ 16 20 ÷ 6
10		
1,2	/	13,3
Ta MAX: 40	/	ULT: 120
PA G - UL 94 V0		
M4		
 0,8 x 4,0		

V	A	mm²/AWG
300	60	20 ÷ 6

min 1 - max 24	
VE / on demand	GR GR1 NE AR BL RO GI

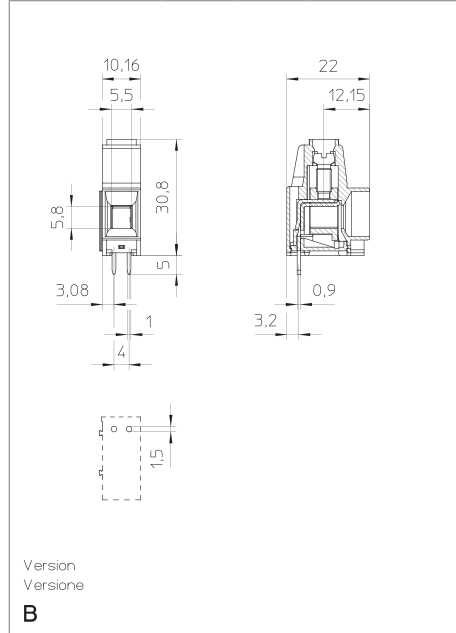

PWT1..F

Interlocking modules · Modulo componibile
Elements modulaires · Zusammensteckbare Blöcke

Poles · Poli · Pôles · Polzahl

1



10,16	
Combination	BF: 800 FF: 300
76	

0,5 ÷ 16 20 ÷ 6	0,5 ÷ 16 20 ÷ 6	0,5 ÷ 16 20 ÷ 6
10		
1,2	/	13,3
Ta MAX: 40	/	ULT: 120
PA G - UL 94 V0		
M4		
 0,8 x 4,0		

V	A	mm²/AWG
300	60	20 ÷ 6

min 1 - max 24	
VE / on demand	GR GR1 NE AR BL RO GI

