

TERMINAL BLOCKS FOR P.C.B.
 RISING CLAMP

MORSETTI PER C.S.
 CARRELLO

BLOCS DE JONCTION C.I.
 ÉTRIER REMONTANT

PRINTKLEMMEN
 LIFTPRINZIP


Pitch Pas	Passo Rastermaß	mm
Rated Voltage Tensione nominale	Tensione nominale Bemessungsspannung	V
Rated Current Intensité nominale	Corrente nominale Bemessungsstrom	A

Types of cables Type du conducteur	Tipo cavi Leitungstypen	
Nominal cross section Section nominale	Sezione nominale Nennquerschnitt	mm² AWG
Stripping lenght Longueur de dénudage	Lunghezza spelatura Abisolierlänge	mm
Torque Couple de serrage	Coppia di torsione Drehmoment	Nm Lb-in
Temperature Température	Temperatura Temperatur	°C
Housing Corps isolant	Corpo isolante Isolierkörper	
Captive Screw Vis Imperdable	Vite Imperdibile Unverlierbare Schraube	
		mm

	IMQ	EN60947-7-4
	VDE	EN60947-7-4
	cUL	UL1059 + C22.2 n°158

Poles Pôles	Poli Polzahl	X
Colours Couleurs	Colori Farben	Y

How to order Référence de commande	Ordinazione Bestellschlüssel
PWT2 P10,16 /X ... Y N...	
Type Pitch Poles Version Colors Printing	
Tipo Passo Poli Versione Colori Numerazione	
Type Pas Pôles Version Couleurs Marquage	
Typ Rastermaß Polzahl Version Farben Bedruckung	

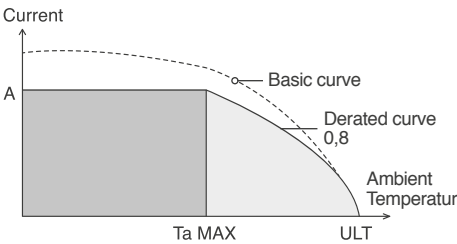


Ta MAX: Max Ambient Temperature to perform nominal values
 ULT: Upper Limit Temperature

PWT2

Single block · Blocco unico
 Monobloc · Einzelblock

Poles · Poli · Pôles · Polzahl

1/2/3

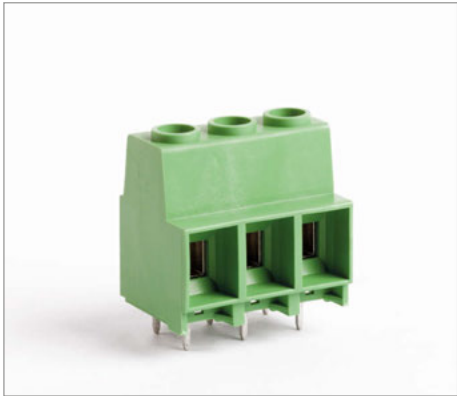


10,16
800
76

0,5 ÷ 16 20 ÷ 6	0,5 ÷ 16 20 ÷ 6	0,5 ÷ 16 20 ÷ 6
10		
1,2	/	13,3
Ta MAX: 40	/	ULT: 120
PA G - UL 94 V0		
M4		
 0,8 x 4,0		

V	A	mm²/AWG
300	60	20 ÷ 6

min 1 - max 3
VE / on demand GR GR1 NE AR BL RO GI

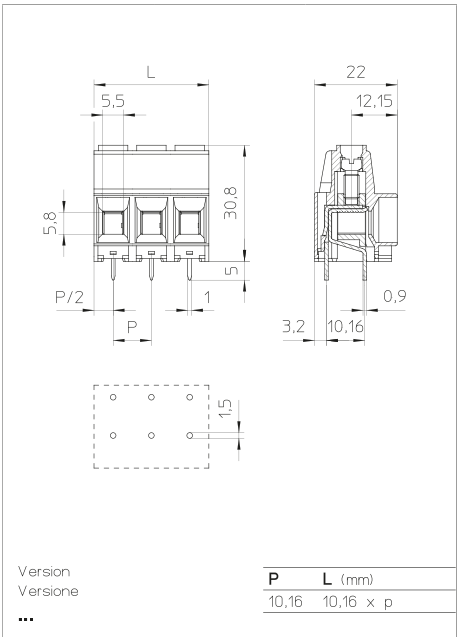

PWT2..BF

Single block · Blocco unico
 Monobloc · Einzelblock

Poles · Poli · Pôles · Polzahl

1/2/3



10,16
800
76

0,5 ÷ 16 20 ÷ 6	0,5 ÷ 16 20 ÷ 6	0,5 ÷ 16 20 ÷ 6
10		
1,2	/	13,3
Ta MAX: 40	/	ULT: 120
PA G - UL 94 V0		
M4		
 0,8 x 4,0		

V	A	mm²/AWG
600	60	20 ÷ 6

min 1 - max 3
VE / on demand GR GR1 NE AR BL RO GI

