


INSULATED JUMPERS

SOCKET JUMPERS



(N= Number
of contacts)

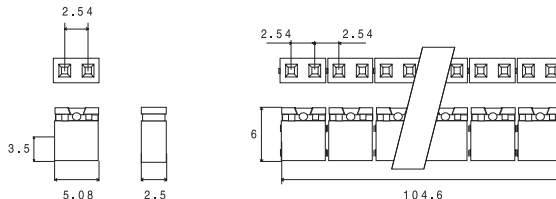

Features	Quick and easy handling in strips Highly reliable twin leaf contact Easy insertion: tapered entry
Material	Housing: Black Glass filled polyester UL 94V0 Contact: Phosphor bronze
Electrical	Current rating: 3A maxi Dielectric withstanding: 500 V AC Contact resistance: 20 mΩ max Insulation resistance: 1000 MΩ mini
Mechanical	Temperature rating: -40 °C to 125 °C
Packaging	Plastic tubes or cardboard boxes

Product Code

A	B	C	D	E	F
313	2512	0xx	4	x	x

C

Packaging
01 by Units in box
20 In strips of 20 shunts

E

Plating
4 *Tin plating 4 μm over Ni 1.27 μm
7 Selective Gold plating 0.2 μm
over Ni
8 Selective Gold plating 0.4 μm
over Ni
9 Selective Gold plating 0.8 μm
over Ni

F

Colour
0 Black
2 Red
6 Blue