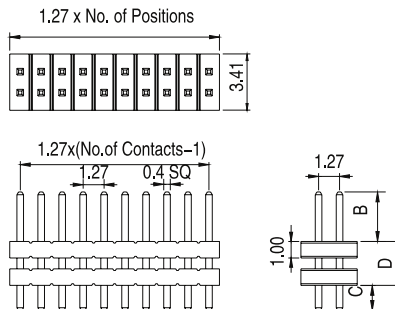
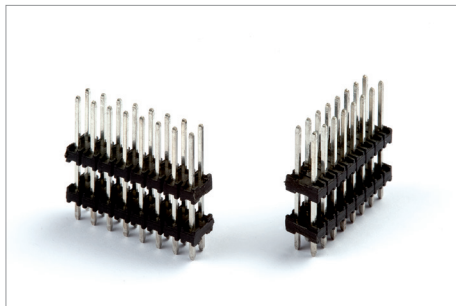


Features Breakable header 1.27x1.27 mm

Material Insulator:
High temperature thermoplastic
UL 94V0
Contact: Copper alloy

Electrical Current rating: 1A maxi
Dielectric withstanding: 500 V AC
Insulation resistance: 500 MΩ mini

Mechanical Temperature rating:
-40 °C to 105 °C

Product Code

A	B	C	D
380	832x	5xx	2x0

B Standard connectors: view table

C Number of contacts from 06 to 100
(for 100 mark 00)

D Plating
1 Gold flash
4 Tin
6 Selective gold flash

	B	C	D
8327	3.0	2.85	6.0
8328	3.0	2.85	4.0