


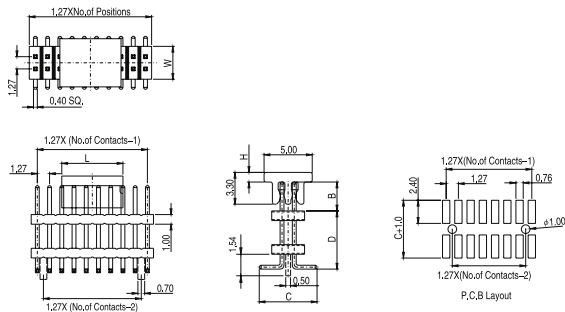

Features	Breakable header 1.27x1.27 mm
Material	Insulator: High temperature thermoplastic UL 94V0 Contact: Copper alloy
Electrical	Current rating: 1A maxi Dielectric withstanding: 500 V AC Insulation resistance: 500 MΩ mini
Mechanical	Temperature rating: -40 °C to 105 °C
Packaging	Tube or T&R

Product Code

A	B	C	D	E	F
380	8xxx	5xx	2x	x	- x

B	Please see table	F	T: tube TC: Tube + Cap RC: Tape & Reel + Cap
C	Number of contacts from 06 to 100 (for 100 mark 00)		
D	Plating 1 Gold flash 4 Tin 6 Selective gold flash		
E	Locating peg 0 without 1 with		

	B	C	D
8329	3.0	5.0	6.0
8330	3.0	5.0	5.0