
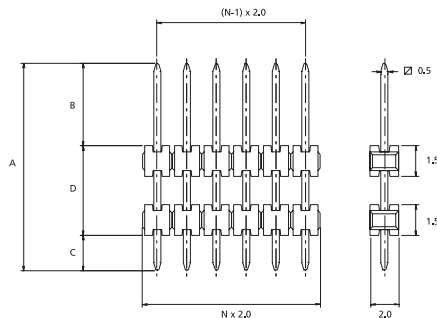


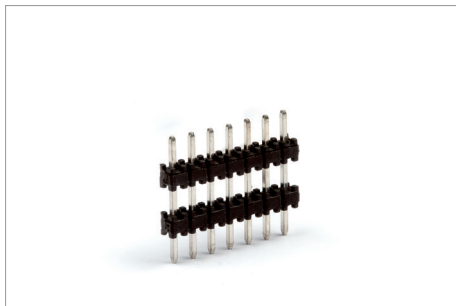

Features	Breakable header
Material	Insulator: High temperature thermoplastic UL 94V0 Contact: Copper alloy
Electrical	Current rating: 1A maxi Dielectric withstanding: 500 V AC Insulation resistance: 500 MΩ mini
Mechanical	Temperature rating: -40 °C to 105 °C

Product Code

A	B	C	D
380	98xx	6xx	4x0

B	See table
C	Number of contacts from 02 to 40
D	Plating 0 Gold 1 Gold flash 4 Tin 7 Selective gold 6 Selective gold flash

	A	B	C	D
9813	10.50	4.90	2.30	3.30
9814	14.50	2.50	4.00	8.00
9815	16.85	2.40	2.45	12.00
9816	20.50	4.00	2.50	14.00