



STRIP HEADERS

MALE HEADER STRAIGHT

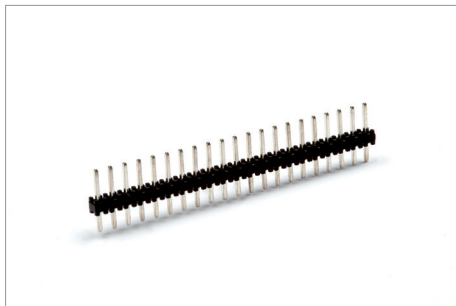

(N= Number
of contacts)

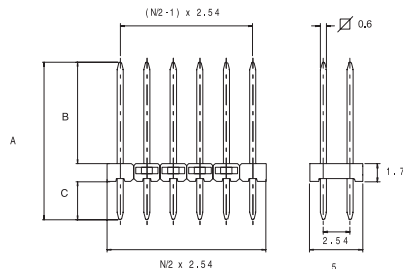

Features	Breakable header
	Insulator profile 1.7 mm Pin side dimension 0.6 mm
Material	Insulator: High temperature thermoplastic UL 94V0
	Contact: Phosphor bronze
Electrical	Current rating: 4A maxi
	Dielectric withstanding: 1000 V AC Insulation resistance: 1000 MΩ mini
Mechanical	Temperature rating: -40 °C to 125 °C
	Pc board Hole diameter Ø 1 mm
Packaging	Recyclable cardboard boxes

Product Code

A	B	C	D	E
38x	0xxx	1	xx	4x0

A	5 Gold version 6 Tin version
B	Version see table
D	Number of contacts per strip from 01 to 40
E	00/40 Plating 0 Gold 0.2 µm over Ni 1.27 µm 4 Tin 4 µm over Ni 1.27 µm Other platings on demand

Version	A	B	C
0543	9.2	4.3	3.2
0298	10.2	5.4	3.1
0358	11.2	6.3	3.2
0334	12.4	7.5	3.2
0369	13.8	8.6	3.5
0395	15.1	8.9	4.5
0575	17.7	12.8	3.2
0211	22	16.5	3.8