
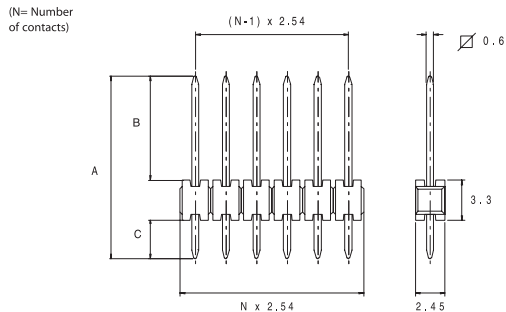


STRIP HEADERS

MALE HEADER STRAIGHT

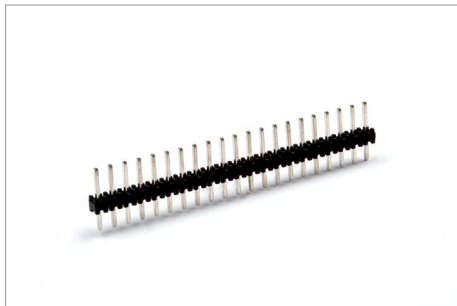

Features	Breakable header
	Insulator profile 3.3 mm
	Pin side dimension 0.6 mm
Material	Insulator:
	High temperature thermoplastic
	UL 94V0
	Contact: Phosphor bronze
Electrical	Current rating: 4A maxi
	Dielectric withstanding: 1000 V AC
	Insulation resistance: 1000 MΩ mini
Mechanical	Temperature rating:
	-40 °C to 125 °C
	Pc board Hole diameter Ø 1 mm
Packaging	Recyclable cardboard boxes

Product Code

A	B	C	D
398	xxxx	1xx	4x0

B	Version
C	Number of contacts from 02 to 40
D	Plating 0 Gold 0.2 µm over Ni 1.27 µm 4 Tin 4 µm over Ni 1.27 µm Other platings on demand

Version	A	B	C
0543	9.2	2.7	3.2
0358	11.2	4.4	3.5
0334	12.4	5.6	3.5
0302	14.5	7.7	3.5
0303	19.5	10.8	5.4
0305	25.8	19	3.5
0307	30.8	24	3.5
0298	10.2	3.4	3.5
0575	17.7	10.9	3.5
0304	23.3	14.6	5.4
0306	28.3	15.6	9.4