



STRIP HEADERS

MALE HEADER RIGHT ANGLE



(N= Number
of contacts)

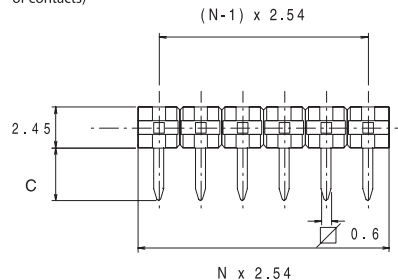

Features	Breakable header Insulator profile 3.3 mm Pin side dimension 0.6 mm
Material	Insulator: High temperature thermoplastic UL 94V0 Contact: Phosphor bronze
Electrical	Current rating: 4A maxi Dielectric withstanding: 1000 V AC Insulation resistance: 1000 MΩ mini
Mechanical	Temperature rating: -40 °C to 125 °C Pc board Hole diameter Ø 1 mm
Packaging	Recyclable cardboard boxes

Product Code

A	B	C	D
399	xxxx	1xx	4x0

B	Version
C	Number of contacts from 02 to 40
D	Plating 0 Gold 0.2 µm over Ni 1.27 µm 4 Tin 4 µm over Ni 1.27 µm Other platings on demand

Version	D	B	C
0395	3.9	3.5	3.5
0303	3.9	3.5	7.9
0304	3.9	3.5	11.7
0358	1.3	2.9	2.7
0334	1.3	3.3	3.5
0302	1.3	5.4	3.5
0211	1.3	11	5.4
0305	1.3	14.8	5.4