


STRIP HEADERS

MALE HEADER RIGHT ANGLE DOUBLE ROW



(N= Number
of contacts)

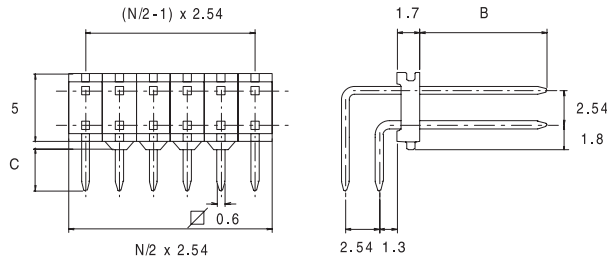

Features	Breakable header Insulator profile 1.7 mm Pin side dimension 0.6 mm
Material	Insulator: High temperature thermoplastic UL 94V0 Contact: Phosphor bronze
Electrical	Current rating: 4A maxi Dielectric withstanding: 1000 V AC Insulation resistance: 1000 MΩ mini
Mechanical	Temperature rating: -40 °C to 125 °C Pc board Hole diameter Ø 1 mm
Packaging	Recyclable cardboard boxes

Product Code

A	B	C	D
39x	0xxx	1xx	4xx

A	1 Gold version 2 Tin version
B	Version
C	Number of contacts per strip from 04 to 80

D

Plating
0 Gold
0.2 μm over Ni 1.27 μm
4 Tin 4 μm over Ni 1.27 μm
Other platings on demand

Version	B	C
0419	5.8	3
0401	6	4.3