



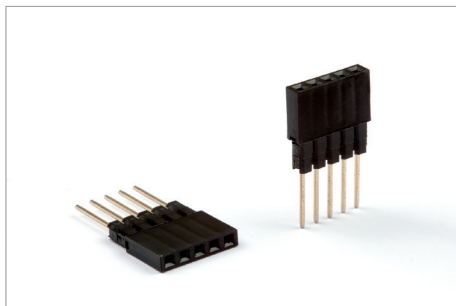

(N= Number
of contacts)

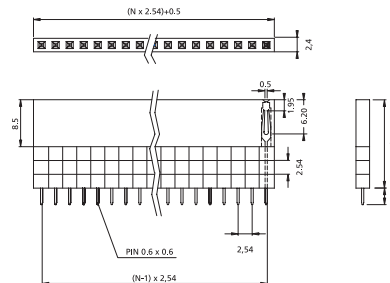

Features	Elevated socket
Material	Insulator: High temperature thermoplastic UL 94V0 Contact: Copper alloy
Electrical	Current rating: 3A maxi Dielectric withstanding: 1000 V AC Insulation resistance: 1000 MΩ mini Contact resistance: 20 mΩ
Mechanical	Temperature rating: -40 °C to 105 °C

Product Code

A	B	C	D	E
401	9718	1xx	4x	x

C	Number of contacts from 03 to 30
D	Plating 0 Gold 0.25 μm 1 Gold flash 4 Tin 7 Selective gold
E	Options for foot lenght and plastic height: see table.

x	A	B
1	11.05	3.0
2	11.05	8.1
3	13.59	5.6
4	16.13	3.0
5	11.05	13.0
6	13.59	10.6
7	16.13	8.0
8	18.67	5.5