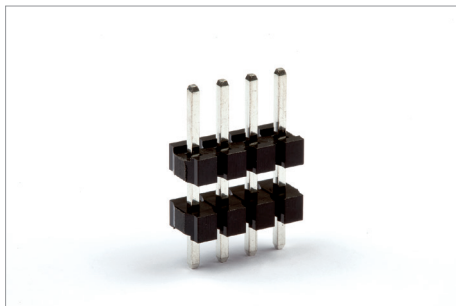


Features	Pitch 3.96 mm pin 1.14 mm Breakable header
Material	Insulator: High temperature thermoplastic UL 94V0 Contact: Copper alloy
Electrical	Current rating: 8.2 A maxi 30 °C temperature rise Dielectric withstanding: 500V AC Insulation resistance: 1000 MΩ mini
Mechanical	Temperature rating: from -40 °C to 105 °C

Product Code

A	B	C	D
468	821x	8xx	4x0

B	7: B=11.43 mm C=4.44 mm D=8.35 mm 8: B=12.70 mm C=4.44 mm D=8.35 mm
C	Number of contacts from 02 to 24.
D	1 Gold flash 4 Tin