
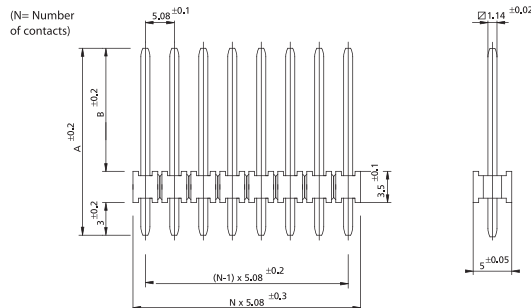


MALE HEADER STRAIGHT

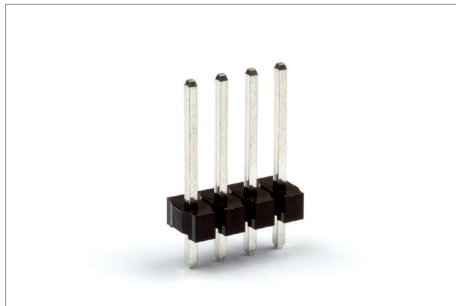

Features	Pitch 5.08 mm pin 1.14 mm Breakable header
Material	Insulator: High temperature thermoplastic UL 94V0 Contact: Copper alloy
Electrical	Current rating: 6 A maxi Dielectric withstanding: 500 V AC Insulation resistance: 1000 MΩ mini
Mechanical	Temperature rating: from -40 °C to 105 °C
Packaging	Box

Product Code

A	B	C	D
---	---	---	---

471 0xxx 2xx 4x0

B	Version (see table)
C	Plating 0 Gold 0.2 μm over Ni 1.27 μm 4 Tin 4 μm over Ni 1.27 μm Other platings on demand

L pin	B	Connector code
16.5	10	2420
17.2	10.7	0002
19.5	12.55	0003
23	16.5	0004
28.5	22	0005
30.4	23.9	2421
40	33.5	0007