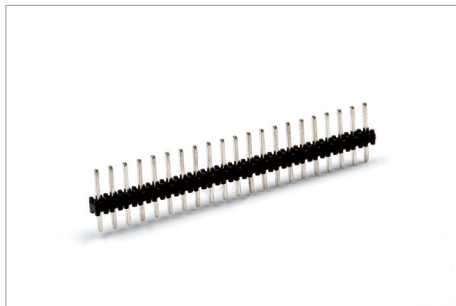


Features	Breakable header
Material	Insulator: High temperature thermoplastic UL 94V0 Contact: Copper alloy
Electrical	Current rating: 1A maxi Dielectric withstanding: 500 V AC Insulation resistance: 500 MΩ mini
Mechanical	Temperature rating: -40 °C to 105 °C

Product Code

A	B	C	D
471	831x	5xx	2x0

B	Standard connectors: view table
C	Number of contacts from 02 to 50
D	Plating 1 Gold flash 4 Tin 7 Selective gold flash

	B	C	H
8316	3.05	2.29	1.5
8317	3.05	2.29	2.5