



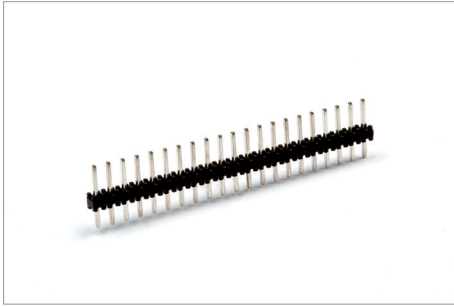

Features	Breakable header
Material	Insulator: High temperature thermoplastic UL 94V0 Contact: Copper alloy
Electrical	Current rating: 1A maxi Dielectric withstanding: 500 V AC Insulation resistance: 500 MΩ mini
Mechanical	Temperature rating: -40 °C to 105 °C

Product Code

A	B	C	D
471	9709	6xx	4x0

C	Number of contacts from 02 to 40
D	Plating 1 Gold flash 0 Gold 0.25 μm 4 Tin 7 Selective gold 6 Selective gold flash