
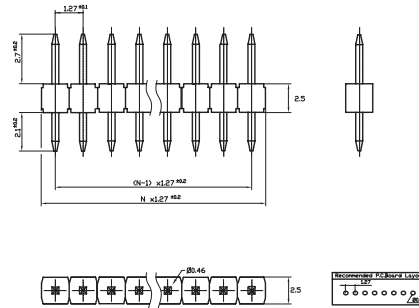


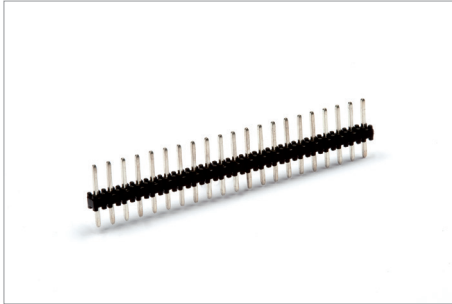

Features	Breakable header
Material	Insulator: High temperature thermoplastic UL 94V0 Contact: Copper alloy
Electrical	Current rating: 1A maxi Dielectric withstanding: 500 V AC Insulation resistance: 500 MΩ mini Contact resistance: 10 mΩ max
Mechanical	Temperature rating: -40 °C to 105 °C

Product Code

A	B	C	D	E
471	9739	5	xx	4x0

D Number of contacts from 02 to 40

E Plating
1 Gold flash
4 Tin
0 Gold 0.25 μm
6 Selective gold flash