
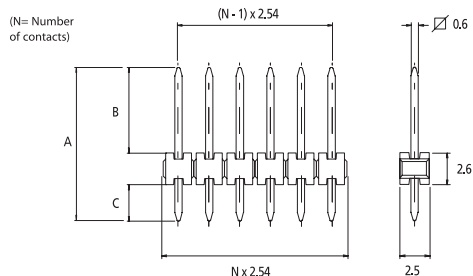


STRIP HEADERS

MALE HEADER STRAIGHT

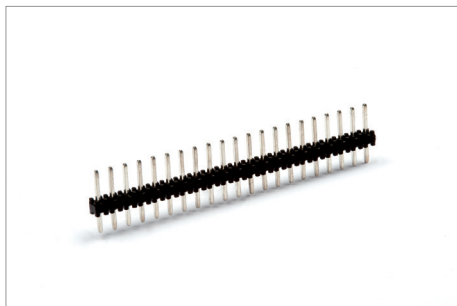

Features	Breakable header
	Insulator profile 2.6 mm
	Pin side dimension 0.6 mm
Material	Insulator:
	High temperature thermoplastic
	UL 94V0
	Contact: Phosphor bronze
Electrical	Current rating: 4A maxi
	Dielectric withstanding: 1000 V AC
	Insulation resistance: 1000 MΩ mini
Mechanical	Temperature rating:
	-40 °C to 125 °C
	Pc board Hole diameter Ø 1 mm
Packaging	Recyclable cardboard boxes

Product Code

A	B	C	D
471	xxxx	1xx	4x0

B	Version
C	Number of contacts from 01 to 40
D	Plating 0 Gold 0.2 µm over Ni 1.27 µm 4 Tin 4 µm over Ni 1.27 µm Other platings on demand

Version	A	B	C
0543	9.2	3.3	3.3
0298	10.2	4.5	3.1
0358	11.2	5.4	3.2
1955	11.2	5.8	2.8
1956	12.4	5.8	4
0334	12.4	6.8	3
2801	12.9	7.3	3
0369	13.8	7.7	3.5
2035	13.8	8.1	3.1
0302	14.5	7	4.9
2754	14.5	8.8	3.1
0395	15.1	8	4.5
2256	15.1	9.3	3.2
2581	16.3	10.9	2.8
0575	17.7	12	3.1
2673	19.5	13.7	3.2
0211	22	15.6	3.8
2643	22	16.5	2.9
2003	25.8	20.2	3
0307	30.8	22.4	5.8
2804	30.8	25.2	3