


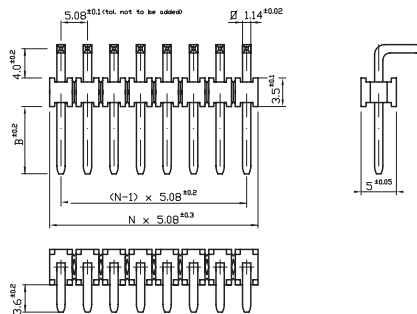

Features	Breakable header
Material	Insulator: Black glass filled polyester UL 94V0 Contact: Phosphor bronze
Electrical	Current rating: 6 A maxi Dielectric withstanding: 500 V AC Insulation resistance: 1000 MΩ mini
Mechanical	Temperature rating: from -40 °C to 105 °C
Packaging	Box

Product Code

A	B	C	D	E
472	xxxx	2	xx	4x0

B	Version (see table)
C	Number of contacts per strip from 02 to 14
D	Plating 0 Gold 0.2 μm over Ni 1.27 μm 4 Tin 4 μm over Ni 1.27 μm Other platings on demand

L pin	B	Connector code
16.5	3.8	0001
17.2	4.5	0002
19.5	6.35	0003
23	10.3	0004
28.5	15.8	0005
30.4	17.7	0006
40	27.3	0007