


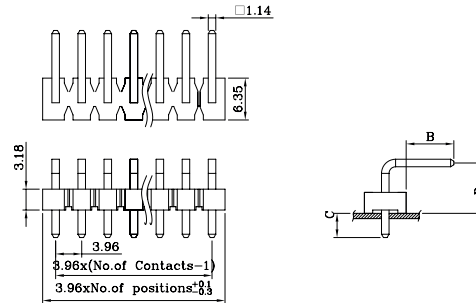

|                   |                                                                                                                                  |
|-------------------|----------------------------------------------------------------------------------------------------------------------------------|
| <b>Features</b>   | Pitch 3.96 mm pin 1.14 mm<br>Breakable header                                                                                    |
| <b>Material</b>   | Insulator:<br>High temperature thermoplastic<br>UL 94V0<br>Contact: Copper alloy                                                 |
| <b>Electrical</b> | Current rating: 8.2 A maxi 30 °C<br>temperature rise<br>Dielectric withstanding: 500 V AC<br>Insulation resistance: 1000 MΩ mini |
| <b>Mechanical</b> | Temperature rating:<br>from -40 °C to 105 °C                                                                                     |

### Product Code

| A   | B    | C   | D   |
|-----|------|-----|-----|
| 472 | 820x | 8xx | 4x0 |

|          |                                                                        |
|----------|------------------------------------------------------------------------|
| <b>B</b> | 5: B=11.43 mm C=3.81 mm D=6.29 mm<br>6: B=12.70 mm C=3.81 mm D=7.56 mm |
| <b>C</b> | Number of contacts from 02 to 24                                       |
| <b>D</b> | 1 Gold flash<br>4 Tin                                                  |