


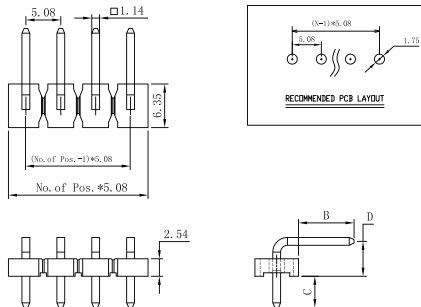

Features	Pitch 5.08 mm pin 1.14 mm Breakable header
Material	Insulator: High temperature thermoplastic UL 94V0 Contact: Copper alloy
Electrical	Current rating: 7.9 A maxi 30 °C temperature rise Dielectric withstanding: 500 V AC Insulation resistance: 1000 MΩ mini
Mechanical	Temperature rating: from -40 °C to 105 °C

Product Code

A	B	C	D
472	82xx	2xx	4x0

B	32: B=8.08 mm C=4.57 mm D=7.62 mm 33: B=13.82 mm C=3.96 mm D=7.62 mm
C	Number of contacts from 01 to 20
D	1 Gold flash 4 Tin