
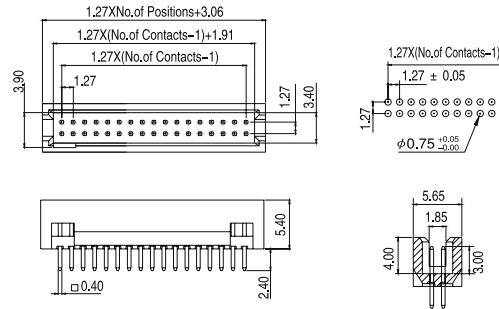


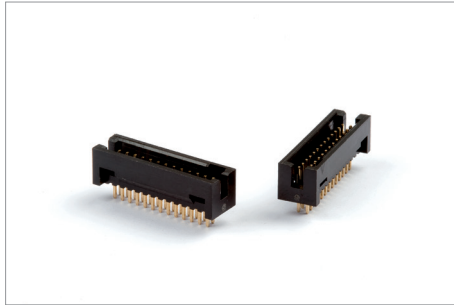

Features	Polarized male header PTH 1.27x1.27 mm
Material	Insulator: High temperature thermoplastic UL 94V0 Contact: Copper alloy
Electrical	Current rating: 1A maxi Dielectric withstanding: 500 V AC Insulation resistance: 500 MΩ mini
Mechanical	Temperature rating -40 °C to 105 °C
Packaging	Tube

Product Code

A	B	C	D
473	8254	5xx	2x0

B	Number of contacts from 06 to 100 (for 100 mark 00)
C	Plating 1 Gold flash 4 Tin 7 Selective gold flash