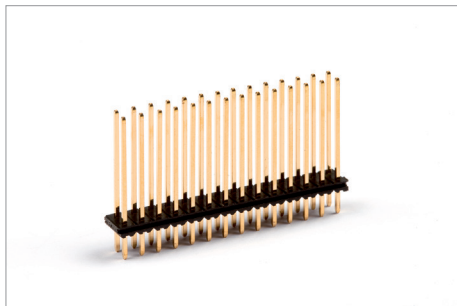


Features Breakable header 1.27x2.54 mm

Material Insulator:
High temperature thermoplastic
UL 94V0
Contact: Copper alloy

Electrical Current rating: 1A maxi
Dielectric withstanding: 500 V AC
Insulation resistance: 500 MΩ mini

Mechanical Temperature rating:
-40 °C to 105 °C

Product Code

A	B	C	D
473	82xx	5xx	2x0

B	Standard connectors: view table
C	Number of contacts from 06 to 100 (for 100 mark 00)
D	Plating 1 Gold flash 4 Tin 6 Selective gold flash

	B	C	H
8269	2.8	2.6	1.7
8270	5.84	3.05	1.7
8271	2.8	2.6	2.54
8272	5.84	3.05	2.54