
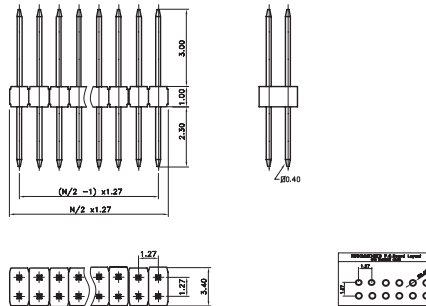


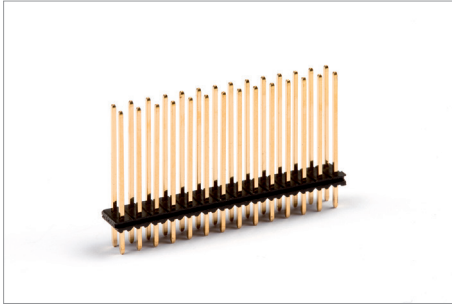

Features Breakable header 1.27x1.27 mm

Material Insulator:
High temperature thermoplastic
UL 94V0
Contact: Copper alloy

Electrical Current rating: 1A maxi
Dielectric withstanding: 500 V AC
Insulation resistance: 500 MΩ mini

Mechanical Temperature rating:
-40 °C to 105 °C

Product Code

A	B	C	D	E
473	9703	5	xx	4x0

D Number of contacts
from 06 to 100 (for 100 sign 00)

E Plating
1 Gold flash
4 Tin
0 Gold 0.25 μm
6 Selective gold flash
7 Selective gold